


様式－１ 氾濫ブロック分割図

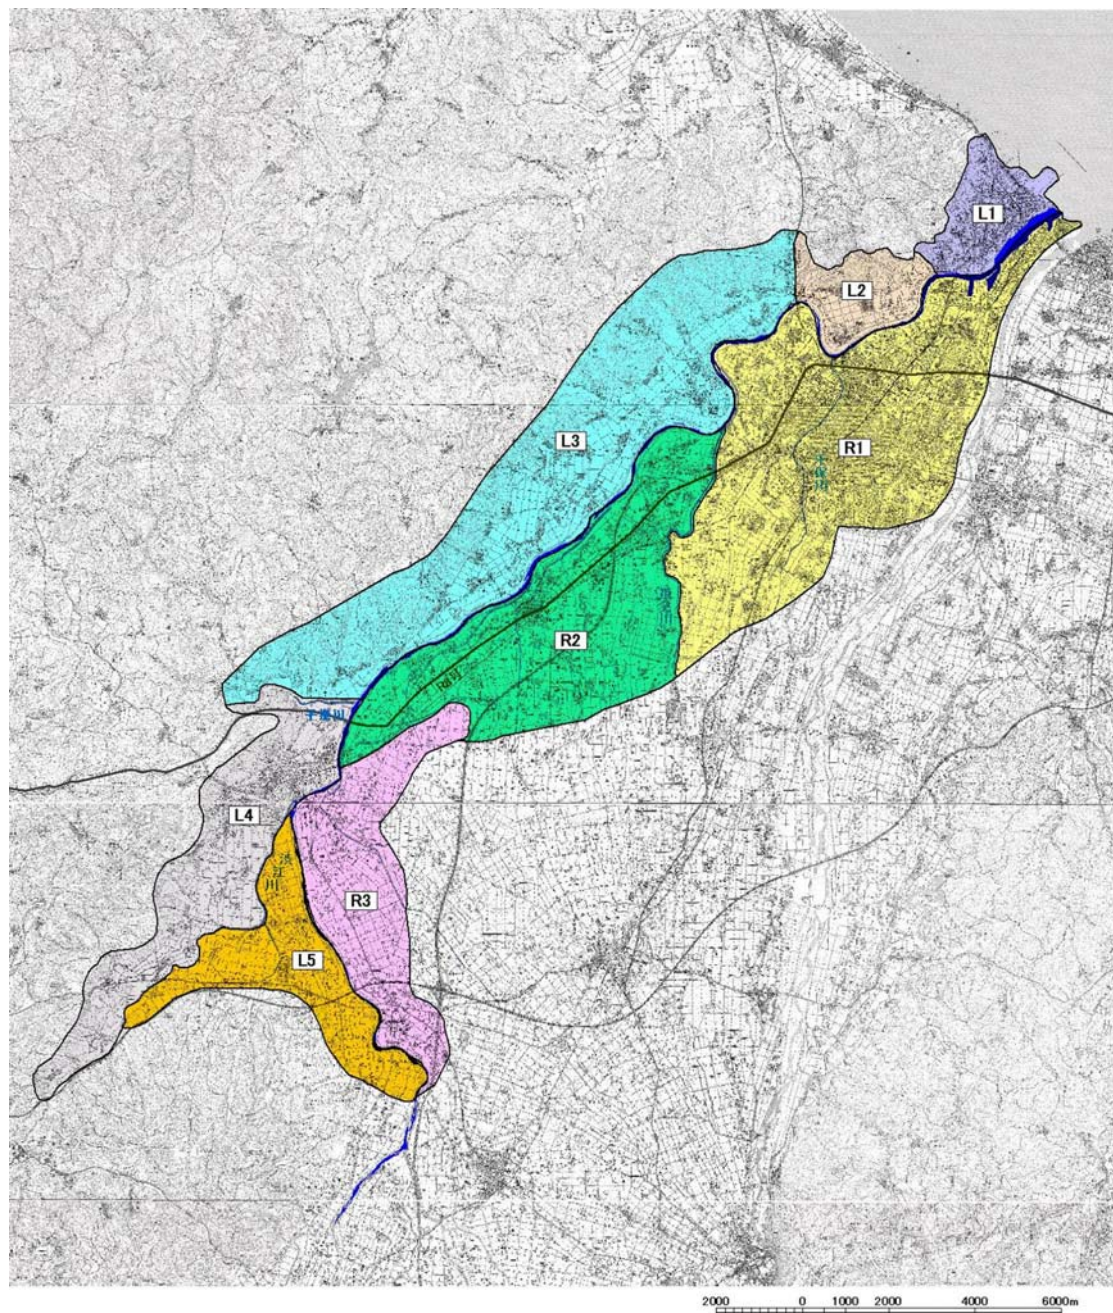

様式－２ 資産データ

水系名：小矢部川

河川名：小矢部川

国勢調査年：平成12年

事業所統計調査年：平成13年

氾濫 ブロック	ブロック 面積 (Km ²)	一般資産等基礎数量									一般資産額				農作物資産			一般資産額 等合計 (百万円)	備考	
		人口	世帯数	従業者数(産 業分類別に算 出)	農漁家数	延床面積	水田面積	畑面積	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物			小計
											償却	在庫	償却	在庫						
L1	3.66	10,984	3,607	3,161	11	0.9	0.2	0.0	126,716	53,884	14,484	9,076	30	2	204,191	20	1	22	204,213	
L2	1.93	2,005	634	1,606	20	0.2	0.7	0.0	23,041	9,474	6,764	5,682	55	3	45,020	88	0	88	45,108	
L3	16.19	9,959	2,643	4,187	220	0.9	9.9	0.2	122,290	39,487	16,471	16,671	618	38	195,574	1,300	16	1,316	196,890	
L4	9.70	11,131	3,166	5,431	101	0.9	5.9	0.0	127,796	47,301	24,216	17,873	283	17	217,487	777	3	779	218,266	
L5	7.71	3,281	890	1,854	80	0.3	6.1	0.0	42,077	13,288	7,360	7,109	224	14	70,072	801	1	802	70,874	
R1	36.17	101,037	34,240	62,917	493	7.2	12.3	0.2	1,018,230	511,480	303,855	209,427	1,387	84	2,044,463	1,604	16	1,620	2,046,083	
R2	24.48	19,050	5,371	9,668	304	1.5	14.5	0.0	208,566	80,238	38,321	39,629	853	52	367,659	1,901	2	1,903	369,561	
R3	10.02	5,462	1,425	3,084	94	0.5	7.5	0.0	66,266	21,293	12,807	10,258	263	16	110,903	982	2	984	111,887	
合計	109.86	162,909	51,976	91,908	1,323	12.3	57.1	0.6	1,734,982	776,444	424,278	315,725	3,713	226	3,255,369	7,473	40	7,513	3,262,882	

様式－３ 被害額

被害額 (百万円)		水系名：小矢部川										河川名：小矢部川			流量規模：(1/5)			昭和43年末						
氾濫ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家庭における応急対策費用			事業所における応急対策費用	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等				被災人口	床上浸水戸数	床下浸水戸数						
			償却	在庫	償却	在庫						小計												
R1	6,719.2	3,469.7	4,497.1	2,782.4	15.0	1.3	17,484.7	61.7	1.3	62.9	29,619.1	597.2	142.6	237.9	380.5	142.0	1,119.7	48,286.5	5,649	982	842			
R2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
R3	49.9	11.3	35.0	16.7	0.0	0.0	112.9	0.0	0.0	0.0	191.3	6.6	1.6	3.0	4.6	0.6	11.7	315.9	131	0	36			
L1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
L2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
L3	7,825.2	3,444.1	2,877.5	2,152.7	21.7	2.0	16,323.0	76.9	0.5	77.3	27,651.2	293.6	127.2	145.5	272.7	179.7	746.1	44,797.6	2,736	555	186			
L4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
L5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
包絡	14,594.3	6,925.1	7,409.5	4,951.8	36.7	3.2	33,920.7	138.5	1.7	140.3	57,461.6	897.4	271.4	386.4	657.8	322.4	1,877.5	93,400.0	8,517	1,537	1,064			

被害額 (百万円)		水系名：小矢部川										河川名：小矢部川			流量規模：(1/10)			昭和43年末						
氾濫ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家庭における応急対策費用			事業所における応急対策費用	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等				被災人口	床上浸水戸数	床下浸水戸数						
			償却	在庫	償却	在庫						小計												
R1	12,360.2	6,847.4	8,352.6	5,121.1	24.2	2.2	32,707.6	68.2	1.5	69.7	55,406.7	984.0	277.4	400.4	677.8	404.5	2,066.3	90,250.4	8,377	1,578	1,183			
R2	6,352.4	2,127.7	2,610.8	1,369.8	11.3	0.9	12,472.9	136.7	0.2	137.0	21,129.0	405.1	137.4	248.1	385.5	52.5	843.1	34,581.9	8,452	551	1,935			
R3	569.8	331.5	331.7	165.5	1.7	0.1	1,400.3	16.2	0.0	16.2	2,372.1	37.2	12.6	20.8	33.4	25.1	95.7	3,884.2	533	102	45			
L1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
L2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
L3	11,608.7	5,263.5	4,304.7	3,358.7	30.7	2.7	24,568.9	89.8	0.5	90.2	41,619.7	419.0	190.1	198.4	388.4	287.4	1,094.7	67,373.5	3,178	825	33			
L4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
L5	65.3	11.4	14.4	3.0	0.1	0.0	94.2	8.5	0.0	8.5	159.6	1.7	0.8	1.5	2.3	0.2	4.2	266.5	62	4	12			
包絡	31,920.7	14,737.7	15,844.0	10,198.9	68.5	6.0	72,775.8	366.6	2.7	369.3	123,282.3	1,900.0	636.9	904.3	1,541.2	773.3	4,214.4	200,641.8	22,120	3,074	3,608			

被害額 (百万円)		水系名：小矢部川										河川名：小矢部川			流量規模：(1/20)			昭和43年末						
氾濫ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家庭における応急対策費用			事業所における応急対策費用	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等				被災人口	床上浸水戸数	床下浸水戸数						
			償却	在庫	償却	在庫						小計												
R1	17,826.2	10,266.7	12,159.7	7,567.4	36.9	3.3	47,860.3	70.7	1.8	72.5	81,075.3	1,287.8	390.6	535.5	926.0	719.3	2,933.1	131,941.0	9,828	2,402	856			
R2	7,967.4	2,825.7	3,369.0	1,764.8	15.6	1.3	15,943.9	164.0	0.2	164.2	27,008.9	492.7	166.7	296.2	463.0	93.3	1,048.9	44,165.8	9,676	759	2,093			
R3	995.2	637.8	595.8	342.8	2.9	0.3	2,574.7	19.4	0.0	19.4	4,361.5	56.1	22.9	30.1	53.0	77.7	186.8	7,142.4	592	142	21			
L1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
L2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
L3	14,211.9	6,343.9	4,633.2	3,709.9	34.5	3.1	28,936.4	95.2	0.7	95.9	49,018.3	466.8	232.3	224.4	456.7	363.3	1,286.8	79,337.4	3,387	842	74			
L4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
L5	125.2	36.5	27.9	5.9	0.4	0.0	195.9	10.9	0.0	10.9	331.9	2.3	1.4	2.3	3.6	1.7	7.7	546.3	62	12	4			
包絡	42,669.5	20,436.7	21,108.6	13,646.5	94.1	8.3	97,963.8	414.3	3.2	417.5	165,950.7	2,372.4	840.2	1,137.7	1,977.9	1,260.1	5,610.5	269,942.4	25,450	4,244	3,488			

被害額 (百万円)		水系名：小矢部川										河川名：小矢部川			流量規模：(1/30)			昭和43年末						
氾濫ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家庭における応急対策費用			事業所における応急対策費用	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等				被災人口	床上浸水戸数	床下浸水戸数						
			償却	在庫	償却	在庫						小計												
R1	20,917.7	12,222.9	14,205.0	8,812.8	39.8	3.6	56,201.8	72.6	1.9	74.5	95,205.8	1,468.1	455.9	621.1	1,077.0	889.0	3,434.1	154,916.2	11,018	2,854	812			
R2	8,341.3	3,027.4	3,592.6	1,914.5	16.1	1.4	16,893.2	172.5	0.2	172.7	28,617.0	515.7	175.6	310.4	485.9	98.0	1,099.6	46,782.5	10,093	792	2,178			
R3	1,192.6	668.1	642.5	371.9	3.0	0.3	2,878.4	29.5	0.0	29.5	4,876.1	66.4	26.2	36.3	62.5	78.3	207.2	7,991.2	893	146	88			
L1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
L2	3,721.1	2,078.2	1,874.0	1,005.6	10.6	1.0	8,690.5	28.4	0.0	28.4	14,721.7	184.4	70.9	98.0	168.8	101.5	454.7	23,895.3	1,619	508	12			
L3	15,913.0	7,130.2	4,879.1	4,000.2	39.3	3.4	31,965.0	100.6	1.1	101.7	54,148.7	505.5	262.2	247.2	509.4	404.6	1,419.6	87,635.0	3,837	879	161			
L4	2,225.3	781.8	706.9	322.3	3.6	0.3	4,040.1	22.7	0.0	23.0	6,844.0	89.8	42.1	66.0	108.1	51.2	249.1	11,156.2	2,096	165	422			
L5	150.4	55.6	39.6	8.5	0.5	0.1	254.7	12.5	0.0	12.5	431.4	2.8	1.8	2.7	4.5	4.6	11.9	710.4	62	12	4			
包絡	54,445.5	26,426.4	26,394.2	16,803.3	117.5	10.4	124,197.3	500.5	4.0	504.5	210,390.2	2,919.4	1,069.1	1,442.5	2,511.6	1,641.5	7,072.4	342,164.7	31,910	5,467	4,200			

様式－３ 被害額

被害額（百万円）		水系名：小矢部川										河川名：小矢部川			流量規模：（1/50）		昭和43年末				
氾濫 ブロック	一般資産被害額						農作物被害額			公共土木 施設等 被害額	営業 停止 損失	家庭における 応急対策費用			事業所 における 応急対策 費用	小計	合計	備考			
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労働 対価	代替活動 等				小計	被災人口	床上浸水 戸数	床下浸水 戸数
			償却	在庫	償却	在庫															
R1	25,394.3	15,505.8	17,954.5	11,549.0	45.5	4.2	70,453.4	74.7	1.9	76.5	119,348.0	1,758.3	563.2	727.2	1,290.4	1,310.2	4,358.9	194,236.8	11,854	3,305	642
R2	9,139.1	3,357.3	3,800.7	2,120.6	18.1	1.6	18,437.2	178.1	0.2	178.3	31,232.7	535.2	189.7	322.0	511.7	119.1	1,166.0	51,014.3	10,202	847	2,154
R3	1,860.3	821.5	910.6	531.4	3.2	0.3	4,127.4	55.2	0.0	55.2	6,991.9	117.3	40.3	61.7	102.0	92.4	311.7	11,486.2	1,900	154	370
L1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
L2	4,709.4	2,669.2	2,368.2	1,357.0	12.1	1.2	11,117.1	29.2	0.0	29.2	18,832.3	221.1	93.8	113.1	206.8	164.1	592.0	30,570.6	1,656	508	26
L3	16,284.9	7,199.5	4,923.2	4,076.0	39.6	3.5	32,526.6	101.4	1.4	102.8	55,100.1	537.1	266.0	248.6	514.7	408.6	1,460.4	89,189.8	3,837	879	161
L4	3,271.0	1,327.2	1,061.6	485.8	8.7	0.7	6,154.9	32.5	0.5	33.0	10,426.4	116.6	58.7	82.4	141.1	106.7	364.4	16,978.8	2,281	251	390
L5	211.8	65.0	43.2	11.2	0.5	0.1	331.8	13.9	0.0	13.9	562.2	3.5	2.7	4.3	7.0	5.1	15.6	923.5	132	12	22
包絡	63,489.4	31,666.0	31,735.2	20,659.2	133.7	12.0	147,695.5	558.8	4.6	563.4	250,196.3	3,400.1	1,259.2	1,634.1	2,893.3	2,246.5	8,539.8	406,995.2	34,470	6,122	4,321

被害額（百万円）		水系名：小矢部川										河川名：小矢部川			流量規模：（1/80）		昭和43年末				
氾濫 ブロック	一般資産被害額						農作物被害額			公共土木 施設等 被害額	営業 停止 損失	家庭における 応急対策費用			事業所 における 応急対策 費用	小計	合計	備考			
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労働 対価	代替活動 等				小計	被災人口	床上浸水 戸数	床下浸水 戸数
			償却	在庫	償却	在庫															
R1	29,296.7	17,866.5	20,425.6	13,475.3	56.2	5.0	81,125.2	75.6	1.9	77.4	137,426.1	1,979.3	648.0	804.5	1,452.5	1,572.7	5,004.4	223,633.1	13,014	3,527	812
R2	12,048.5	5,108.6	5,016.0	2,941.5	26.5	2.3	25,143.4	187.7	0.2	188.0	42,593.0	633.0	238.2	386.3	624.5	190.3	1,447.8	69,372.1	10,697	1,419	1,731
R3	3,375.5	1,299.7	1,535.4	787.1	7.8	0.7	7,006.2	107.5	0.5	108.0	11,868.5	207.8	66.6	106.3	172.9	128.0	508.6	19,491.3	3,620	228	723
L1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
L2	5,385.1	3,168.7	2,990.9	1,765.7	12.6	1.3	13,324.4	29.2	0.0	29.2	22,571.5	263.0	111.7	125.1	236.8	217.5	717.3	36,642.4	1,656	520	14
L3	17,034.5	7,342.7	4,949.4	4,103.5	41.2	3.6	33,474.8	102.8	1.4	104.1	56,706.3	546.8	271.2	254.1	525.3	409.3	1,481.4	91,766.7	3,883	937	117
L4	3,657.8	1,515.7	1,170.8	526.7	9.8	0.8	6,881.7	34.3	0.5	34.7	11,657.6	123.0	63.9	88.4	152.2	118.4	393.6	18,967.7	2,303	305	341
L5	211.8	65.0	43.2	11.2	0.5	0.1	331.8	13.9	0.0	13.9	562.2	3.5	2.7	4.3	7.0	5.1	15.6	923.5	132	12	22
包絡	73,630.0	37,096.7	36,826.0	24,122.9	160.8	14.2	171,850.5	627.8	5.1	632.8	291,114.8	3,874.2	1,447.4	1,848.1	3,295.5	2,679.5	9,849.2	473,447.6	38,121	7,120	4,368

様式－４ 年平均被害軽減期待額

(単位：億円)

流量規模	年平均 超過確率	被害額			区間平均 被害額 ④	区間確率 ⑤	年平均 被害額 ④×⑤	年平均被害額 の累計 ＝年平均被害軽減期待額	備考
		①S43着手時	②事業完成	被害軽減額 ③＝①－②					
W=1/3.1	0.323	0.0	0.0	0.0	467.0	0.123	57.2	57.25	
W=1/ 5	0.200	934.0	0.0	934.0	1,470.2	0.100	147.0	204.27	
W=1/ 10	0.100	2,006.4	0.0	2,006.4	2,352.9	0.050	117.6	321.91	
W=1/ 20	0.050	2,699.4	0.0	2,699.4	3,060.5	0.017	51.0	372.92	
W=1/ 30	0.033	3,421.6	0.0	3,421.6	3,745.8	0.013	49.9	422.87	
W=1/ 50	0.020	4,070.0	0.0	4,070.0	4,402.2	0.008	33.0	455.88	
W=1/ 80	0.013	4,734.5	0.0	4,734.5					

様式－５ 費用対便益

水系名：小矢部川水系 河川名：小矢部川

年次	t	便益				費用				費用便益比 B/C	純現在価値 B-C	
		便益①		残存価値 ②	計 ①+②	建設費③		維持管理費④				計③+④
		便益	現在価値			費用	現在価値	費用	現在価値			
S43	-38	0.00	0.00		12.05	53.51	0.34	1.51	12.39	55.01		
S44	-37	10.20	43.54		13.17	56.20	0.47	2.02	13.64	58.21		
S45	-36	20.40	83.73		10.15	41.65	0.53	2.19	10.68	43.84		
S46	-35	30.60	120.76		10.79	42.59	0.64	2.54	11.44	45.14		
S47	-34	40.80	154.82		11.90	45.15	0.75	2.86	12.65	48.01		
S48	-33	51.00	186.08		10.48	38.24	0.52	1.89	11.00	40.13		
S49	-32	61.20	214.71		11.43	40.10	0.49	1.71	11.92	41.81		
S50	-31	71.41	240.86		11.64	39.25	1.35	4.57	12.99	43.82		
S51	-30	81.61	264.68		9.19	29.80	1.37	4.45	10.56	34.25		
S52	-29	91.81	286.31		10.38	32.37	1.27	3.97	11.65	36.33		
S53	-28	102.01	305.89		15.42	46.23	1.51	4.53	16.93	50.76		
S54	-27	112.21	323.54		21.20	61.13	1.49	4.29	22.69	65.42		
S55	-26	122.41	339.38		16.23	45.00	1.36	3.77	17.59	48.77		
S56	-25	132.61	353.52		20.81	55.48	1.38	3.67	22.19	59.15		
S57	-24	142.81	366.07		18.59	47.66	1.47	3.77	20.06	51.43		
S58	-23	153.01	377.13		14.46	35.64	1.76	4.35	16.23	39.99		
S59	-22	163.21	386.80		12.23	28.99	1.83	4.33	14.06	33.31		
S60	-21	173.41	395.17		17.17	39.13	1.95	4.43	19.12	43.56		
S61	-20	183.61	402.32		12.01	26.31	2.04	4.46	14.04	30.77		
S62	-19	193.82	408.34		12.87	27.11	2.03	4.28	14.90	31.39		
S63	-18	204.02	413.30		18.63	37.75	2.13	4.32	20.77	42.07		
H1	-17	214.22	417.27		18.97	36.94	2.39	4.65	21.35	41.59		
H2	-16	224.42	420.33		22.90	42.90	2.34	4.38	25.24	47.28		
H3	-15	234.62	422.53		19.27	34.71	2.39	4.30	21.66	39.01		
H4	-14	244.82	423.95		15.72	27.23	2.47	4.27	18.19	31.50		
H5	-13	255.02	424.63		22.04	36.70	2.68	4.46	24.72	41.17		
H6	-12	265.22	424.63		9.12	14.61	3.63	5.82	12.76	20.42		
H7	-11	275.42	424.00		18.06	27.80	4.12	6.34	22.17	34.14		
H8	-10	285.62	422.79		15.92	23.57	4.22	6.24	20.14	29.81		
H9	-9	295.82	421.05		13.37	19.04	4.06	5.79	17.44	24.82		
H10	-8	306.02	418.81		19.88	27.20	5.00	6.84	24.87	34.04		
H11	-7	316.22	416.13		15.21	20.01	6.71	8.83	21.92	28.84		
H12	-6	326.43	413.03		23.83	30.15	5.05	6.39	28.88	36.55		
H13	-5	336.63	409.56		18.02	21.93	6.71	8.16	24.73	30.09		
H14	-4	346.83	405.74		21.68	25.36	4.82	5.64	26.50	31.00		
H15	-3	357.03	401.61		8.15	9.17	4.47	5.03	12.62	14.20		
H16	-2	367.23	397.19		19.75	21.36	4.60	4.98	24.35	26.34		
H17	-1	377.43	392.53		11.76	12.23	4.10	4.26	15.85	16.49		
H18	0	387.63	387.63		13.46	13.46	3.09	3.09	16.55	16.55		
H19	1	389.02	374.06		13.46	12.94	3.09	2.98	16.55	15.91		
H20	2	390.42	360.96		13.46	12.44	3.09	2.86	16.55	15.30		
H21	3	391.81	348.32		13.46	11.96	3.09	2.75	16.55	14.71		
H22	4	393.20	336.11		13.46	11.50	3.09	2.65	16.55	14.15		
H23	5	394.59	324.33		13.46	11.06	3.09	2.54	16.55	13.60		
H24	6	395.99	312.95		13.46	10.63	3.09	2.45	16.55	13.08		
H25	7	397.38	301.98		13.46	10.23	3.09	2.35	16.55	12.58		
H26	8	398.77	291.38		13.46	9.83	3.09	2.26	16.55	12.09		
H27	9	400.17	281.15		13.46	9.45	3.09	2.17	16.55	11.63		
H28	10	401.56	271.28		13.46	9.09	3.09	2.09	16.55	11.18		
H29	11	402.95	261.75		13.46	8.74	3.09	2.01	16.55	10.75		
H30	12	404.34	252.55		13.46	8.40	3.09	1.93	16.55	10.34		
H31	13	405.74	243.68		13.46	8.08	3.09	1.86	16.55	9.94		
H32	14	407.13	235.11		13.46	7.77	3.09	1.79	16.55	9.56		
H33	15	408.52	226.84		13.46	7.47	3.09	1.72	16.55	9.19		
H34	16	409.92	218.86		13.46	7.18	3.09	1.65	16.55	8.84		
H35	17	411.31	211.15		13.46	6.91	3.09	1.59	16.55	8.50		
H36	18	412.70	203.72		13.46	6.64	3.09	1.53	16.55	8.17		
H37	19	414.09	196.55		13.46	6.39	3.09	1.47	16.55	7.86		
H38	20	415.49	189.62		13.46	6.14	3.09	1.41	16.55	7.55		
H39	21	416.88	182.94		13.46	5.90	3.09	1.36	16.55	7.26		
H40	22	418.27	176.49		13.46	5.68	3.09	1.31	16.55	6.98		
H41	23	419.67	170.27		13.46	5.46	3.09	1.26	16.55	6.72		
H42	24	421.06	164.26		13.46	5.25	3.09	1.21	16.55	6.46		
H43	25	422.45	158.47		13.46	5.05	3.09	1.16	16.55	6.21		
H44	26	423.84	152.88		13.46	4.85	3.09	1.12	16.55	5.97		
H45	27	425.24	147.48		13.46	4.67	3.09	1.07	16.55	5.74		
H46	28	426.63	142.27		13.46	4.49	3.09	1.03	16.55	5.52		
H47	29	428.02	137.25		13.46	4.31	3.09	0.99	16.55	5.31		
H48	30	429.42	132.40		13.46	4.15	3.09	0.95	16.55	5.10		
H49	31	430.81	127.72		13.46	3.99	3.09	0.92	16.55	4.91		
H50	32	432.20	123.20		13.46	3.84	3.09	0.88	16.55	4.72		
H51	33	433.59	118.85		13.46	3.69	3.09	0.85	16.55	4.54		
H52	34	434.99	114.64		13.46	3.55	3.09	0.82	16.55	4.36		
H53	35	436.38	110.59		13.46	3.41	3.09	0.78	16.55	4.19		
H54	36	437.77	106.67		13.46	3.28	3.09	0.75	16.55	4.03		
H55	37	439.17	102.90		13.46	3.15	3.09	0.73	16.55	3.88		
H56	38	440.56	99.25		13.46	3.03	3.09	0.70	16.55	3.73		
H57	39	441.95	95.74		13.46	2.91	3.09	0.67	16.55	3.59		
H58	40	443.34	92.34		13.46	2.80	3.09	0.64	16.55	3.45		
H59	41	444.74	89.07		13.46	2.69	3.09	0.62	16.55	3.31		
H60	42	446.13	85.91		13.46	2.59	3.09	0.60	16.55	3.19		
H61	43	447.52	82.87		13.46	2.49	3.09	0.57	16.55	3.06		
H62	44	448.92	79.93		13.46	2.40	3.09	0.55	16.55	2.95		
H63	45	450.31	77.09		13.46	2.30	3.09	0.53	16.55	2.83		
H64	46	451.70	74.36		13.46	2.22	3.09	0.51	16.55	2.72		
H65	47	453.09	71.72		13.46	2.13	3.09	0.49	16.55	2.62		
H66	48	454.49	69.17		13.46	2.05	3.09	0.47	16.55	2.52		
H67	49	455.88	66.71		13.46	1.97	3.09	0.45	16.55	2.42		

今後の整備期間(50年)

様式－5 費用対便益

水系名：小矢部川水系 河川名：小矢部川

	年次	t	便益				費用				費用便益比 B/C	純現在価値 B-C		
			便益①		残存価値 ②	計 ①+②	建設費③		維持管理費④				計③+④	
			便益	現在価値			費用	現在価値	費用	現在価値			費用	現在価値
施 設 完 成 後 の 評 価 期 間	H68	50	455.88	64.15				3.09	0.44	3.09	0.44			
	H69	51	455.88	61.68				3.09	0.42	3.09	0.42			
	H70	52	455.88	59.31				3.09	0.40	3.09	0.40			
	H71	53	455.88	57.03				3.09	0.39	3.09	0.39			
	H72	54	455.88	54.83				3.09	0.37	3.09	0.37			
	H73	55	455.88	52.73				3.09	0.36	3.09	0.36			
	H74	56	455.88	50.70				3.09	0.34	3.09	0.34			
	H75	57	455.88	48.75				3.09	0.33	3.09	0.33			
	H76	58	455.88	46.87				3.09	0.32	3.09	0.32			
	H77	59	455.88	45.07				3.09	0.31	3.09	0.31			
	H78	60	455.88	43.34				3.09	0.29	3.09	0.29			
	H79	61	455.88	41.67				3.09	0.28	3.09	0.28			
	H80	62	455.88	40.07				3.09	0.27	3.09	0.27			
	H81	63	455.88	38.53				3.09	0.26	3.09	0.26			
	H82	64	455.88	37.04				3.09	0.25	3.09	0.25			
	H83	65	455.88	35.62				3.09	0.24	3.09	0.24			
	H84	66	455.88	34.25				3.09	0.23	3.09	0.23			
H85	67	455.88	32.93				3.09	0.22	3.09	0.22				
H86	68	455.88	31.67				3.09	0.21	3.09	0.21				
H87	69	455.88	30.45				3.09	0.21	3.09	0.21				
H88	70	455.88	29.28				3.09	0.20	3.09	0.20				
H89	71	455.88	28.15				3.09	0.19	3.09	0.19				
H90	72	455.88	27.07				3.09	0.18	3.09	0.18				
H91	73	455.88	26.03				3.09	0.18	3.09	0.18				
H92	74	455.88	25.03				3.09	0.17	3.09	0.17				
H93	75	455.88	24.06				3.09	0.16	3.09	0.16				
H94	76	455.88	23.14				3.09	0.16	3.09	0.16				
H95	77	455.88	22.25				3.09	0.15	3.09	0.15				
H96	78	455.88	21.39				3.09	0.15	3.09	0.15				
H97	79	455.88	20.57				3.09	0.14	3.09	0.14				
H98	80	455.88	19.78				3.09	0.13	3.09	0.13				
H99	81	455.88	19.02				3.09	0.13	3.09	0.13				
H100	82	455.88	18.29				3.09	0.12	3.09	0.12				
H101	83	455.88	17.58				3.09	0.12	3.09	0.12				
H102	84	455.88	16.91				3.09	0.11	3.09	0.11				
H103	85	455.88	16.26				3.09	0.11	3.09	0.11				
H104	86	455.88	15.63				3.09	0.11	3.09	0.11				
H105	87	455.88	15.03				3.09	0.10	3.09	0.10				
H106	88	455.88	14.45				3.09	0.10	3.09	0.10				
H107	89	455.88	13.90				3.09	0.09	3.09	0.09				
H108	90	455.88	13.36				3.09	0.09	3.09	0.09				
H109	91	455.88	12.85				3.09	0.09	3.09	0.09				
H110	92	455.88	12.35				3.09	0.08	3.09	0.08				
H111	93	455.88	11.88				3.09	0.08	3.09	0.08				
H112	94	455.88	11.42				3.09	0.08	3.09	0.08				
H113	95	455.88	10.98				3.09	0.07	3.09	0.07				
H114	96	455.88	10.56				3.09	0.07	3.09	0.07				
H115	97	455.88	10.15				3.09	0.07	3.09	0.07				
H116	98	455.88	9.76				3.09	0.07	3.09	0.07				
H117	99	455.88	9.39				3.09	0.06	3.09	0.06				
合計			51052.9	23339.3	4.8	23344.0	1257.3	1600.8	405.9	249.2	1663.2	1850.0	12.62	21,494

=B

=C

便益 (億円)	費用 (億円)	費用便益比	純現在価値
B	C	B/C	B-C
23,344	1,850	12.62	21,494