


GEOMETRIC VISIBILITY REQUIREMENTS FOR SIDE-MARKER LAMPS

The side marker lamps shall be visible from the meshed sections in the following figures.


Range of visibility in up-and-down direction

(Installation height: 750 mm or more)

(Installation height: Less than 750 mm)

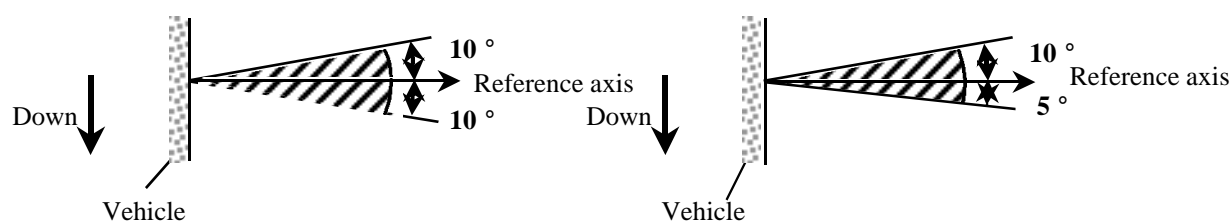

Range of visibility in right-and-left direction ()

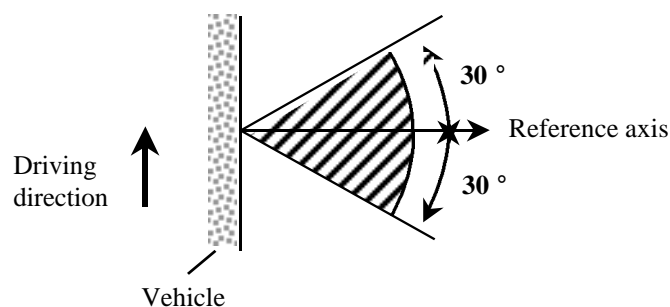

With regard to the range of visibility angles in right-and-left direction, the figure shows the device mounted on the right side.