


様式－１ 氾濫ブロック分割図

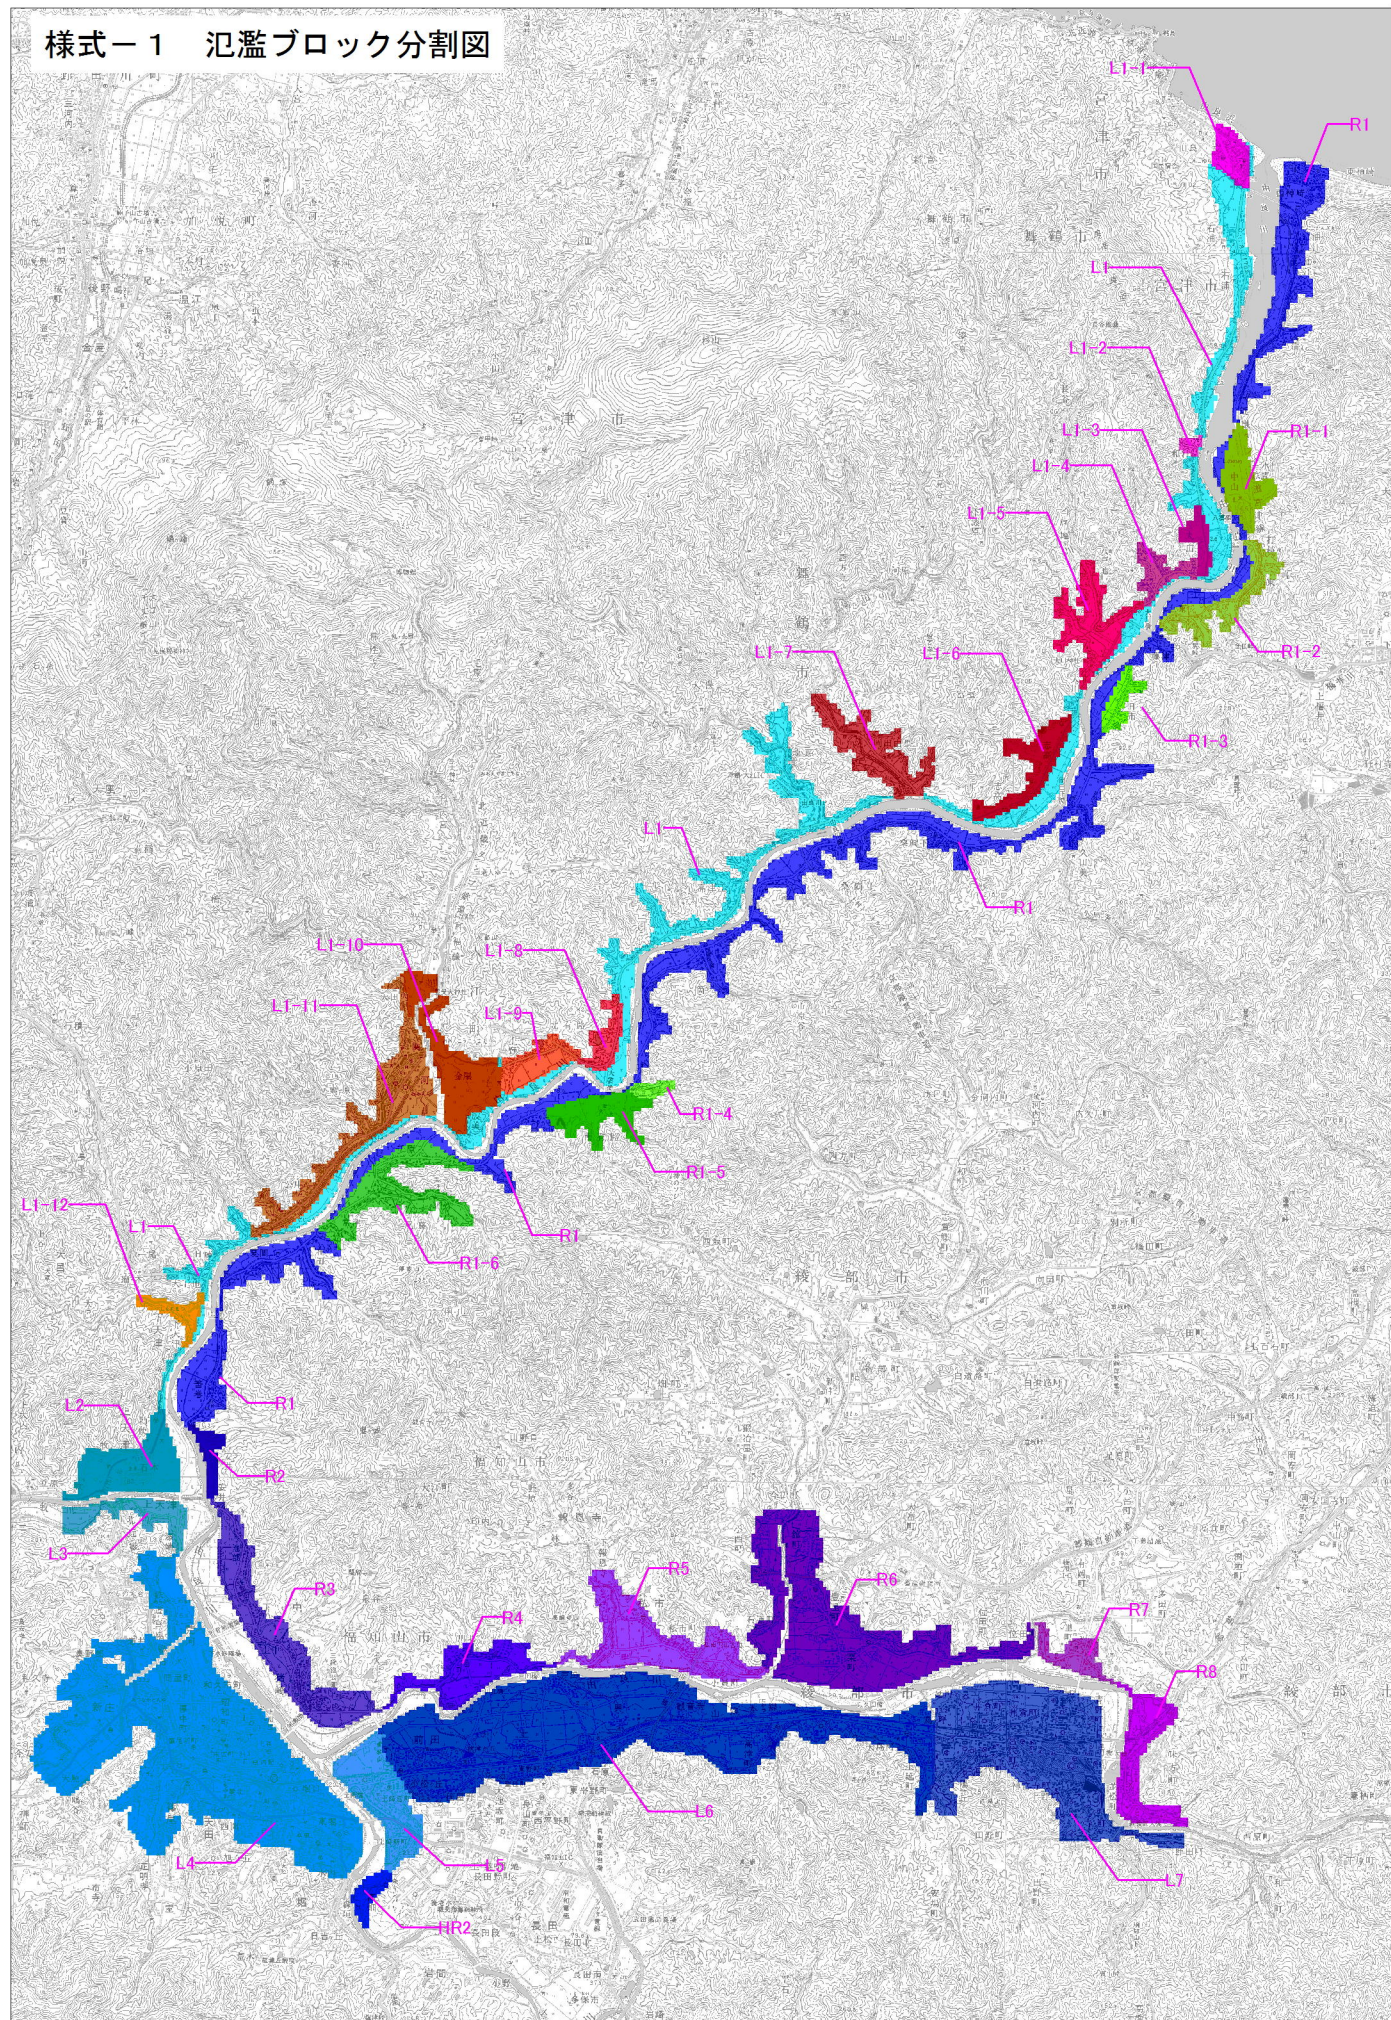

様式－２ 資産データ 水系名：由良川 河川名：由良川 国勢調査年：H22 事業所統計調査年：H18

氾濫 ブロック	ブロック 面積 (ha)	一般資産等基礎数量								一般資産額（百万円）						農作物資産額（百万円）			一般資産 額等合計 (百万円)	備考
		人口 (人)	世帯数 (世帯)	従業者 数 (産業 分類別 に算 出) (人)	農漁家 数 (世帯)	延床面 積 (ha)	水田面 積 (ha)	畑面積 (ha)	家屋	家庭用 品	事業所資産		農漁家資産		小計	水稻	畑作物	小計		
											償却	在庫	償却	在庫						
L1	613.7	627.7	240.2	141.5	36.2	65,925.5	19,159.5	10,326.7	11,108.4	3,527.5	437.5	280.0	68.8	19.4	15,441.6	195.8	98.6	294.4	15,736.0	
L1-1	37.5	522.0	216.5	134.0	7.6	52,974.9	655.3	52.4	8,926.3	3,178.7	382.9	248.2	14.4	4.1	12,754.6	6.7	0.5	7.2	12,761.7	
L1-2	7.9	88.5	33.4	2.8	2.5	5,256.8	0.0	0.0	885.8	490.5	8.0	0.6	4.7	1.3	1,390.8	0.0	0.0	0.0	1,390.8	
L1-3	26.5	86.7	27.9	32.0	2.6	7,270.8	1,127.0	0.0	1,225.1	408.9	56.2	22.0	4.9	1.4	1,718.5	11.5	0.0	11.5	1,730.1	
L1-4	38.8	147.5	44.5	18.8	8.0	10,143.5	786.3	340.7	1,709.2	653.4	25.4	10.7	15.2	4.3	2,418.0	8.0	3.3	11.3	2,429.3	
L1-5	102.6	121.0	47.8	70.1	8.8	11,789.6	4,770.2	183.5	1,986.6	701.9	213.8	74.2	16.6	4.7	2,997.7	48.8	1.8	50.5	3,048.2	
L1-6	74.3	336.8	114.8	119.4	15.1	18,265.0	3,197.6	131.1	3,077.7	1,686.0	348.5	303.4	28.6	8.1	5,452.2	32.7	1.3	33.9	5,486.2	
L1-7	111.5	110.7	39.1	41.9	4.9	5,162.4	5,163.4	183.5	869.9	574.2	142.6	69.7	9.3	2.6	1,668.3	52.8	1.8	54.5	1,722.8	
L1-8	38.6	134.7	49.7	33.8	6.6	12,879.9	1,467.8	52.4	2,170.3	730.2	82.7	51.2	12.5	3.5	3,050.4	15.0	0.5	15.5	3,065.9	
L1-9	55.6	153.8	52.1	45.6	8.7	17,946.8	2,673.4	366.9	3,024.0	764.6	61.4	114.0	16.5	4.7	3,985.2	27.3	3.5	30.8	4,016.1	
L1-10	128.0	670.1	242.3	216.3	16.2	59,880.2	5,818.6	498.0	10,089.8	3,557.3	740.6	482.9	30.7	8.7	14,909.9	59.5	4.8	64.2	14,974.2	
L1-11	188.4	1,035.2	408.1	639.1	12.3	105,551.1	3,721.8	2,463.7	17,785.4	5,992.7	2,001.4	1,165.8	23.4	6.6	26,975.3	38.0	23.5	61.6	27,036.9	
L1-12	29.9	111.1	39.3	5.8	4.3	11,735.3	1,127.0	0.0	1,977.4	577.7	17.8	8.8	8.1	2.3	2,592.0	11.5	0.0	11.5	2,603.6	
L2	121.7	556.2	206.2	188.8	21.6	44,046.0	4,298.4	838.7	7,421.8	3,028.0	521.2	382.6	41.0	11.6	11,406.2	43.9	8.0	51.9	11,458.1	
L3	66.4	118.9	25.7	170.9	3.9	6,097.4	3,957.7	0.0	1,027.4	376.6	368.6	152.9	7.3	2.1	1,934.9	40.5	0.0	40.5	1,975.3	
L4	991.3	24,572.6	10,381.7	20,864.5	139.6	2,670,589.6	17,455.9	969.8	449,994.4	152,434.1	96,752.4	31,789.7	265.2	74.8	731,310.5	178.4	9.3	187.7	731,498.2	
L5	127.0	2,935.4	1,219.0	2,175.1	20.6	334,470.9	2,490.0	681.5	56,358.3	17,899.1	8,341.7	6,050.3	39.1	11.0	88,699.6	25.5	6.5	32.0	88,731.6	
L6	851.7	12,723.5	5,018.9	3,260.5	158.6	1,057,223.7	30,429.8	12,764.3	178,142.2	73,693.1	10,416.9	5,678.2	301.3	85.0	268,316.7	311.0	121.9	432.9	268,749.6	
L7	449.4	11,463.2	4,921.7	7,564.9	87.2	1,189,995.4	7,758.2	1,887.1	200,514.2	72,265.7	25,802.2	13,590.1	165.7	46.8	312,384.8	79.3	18.0	97.3	312,482.1	
R1	892.6	1,618.6	554.4	116.0	91.3	138,611.3	30,010.5	16,119.2	23,356.0	8,140.2	337.5	252.5	173.4	48.9	32,308.5	306.7	153.9	460.6	32,769.2	
R1-1	69.0	111.2	39.5	49.4	1.7	8,545.1	3,014.2	786.3	1,439.9	579.9	82.6	110.9	3.2	0.9	2,217.4	30.8	7.5	38.3	2,255.7	
R1-2	80.8	207.4	67.6	7.4	14.4	9,519.5	3,197.6	183.5	1,604.0	992.3	17.0	8.6	27.4	7.7	2,657.0	32.7	1.8	34.4	2,691.4	
R1-3	29.9	101.5	36.8	7.6	8.9	4,482.0	1,703.7	0.0	755.2	540.8	14.0	20.5	17.0	4.8	1,352.3	17.4	0.0	17.4	1,369.7	
R1-4	13.6	12.4	4.4	0.0	0.8	1,142.8	681.5	0.0	192.6	64.7	0.0	0.0	1.6	0.5	259.3	7.0	0.0	7.0	266.3	
R1-5	73.7	253.8	100.5	62.3	11.0	34,564.4	2,332.7	209.7	5,824.1	1,474.9	167.4	90.0	21.0	5.9	7,583.3	23.8	2.0	25.8	7,609.2	
R1-6	134.3	290.3	100.0	23.5	14.8	44,148.0	5,006.1	629.0	7,438.9	1,468.4	57.1	62.0	28.0	7.9	9,062.4	51.2	6.0	57.2	9,119.5	
R2	26.0	39.5	15.0	2.5	2.5	9,066.2	366.9	0.0	1,527.7	219.6	11.6	0.7	4.8	1.3	1,765.6	3.8	0.0	3.8	1,769.3	
R3	198.6	1,987.8	787.0	309.5	61.0	146,413.7	8,072.7	2,332.7	24,670.7	11,556.0	779.5	466.8	115.8	32.7	37,621.6	82.5	22.3	104.8	37,726.3	
R4	109.1	403.5	153.1	17.6	29.5	114,810.4	4,036.3	2,385.1	19,345.5	2,247.9	68.9	34.6	56.0	15.8	21,768.6	41.3	22.8	64.0	21,832.6	
R5	192.3	641.9	226.5	210.9	33.9	72,355.9	10,536.4	1,415.3	12,192.0	3,325.0	411.5	244.5	64.4	18.2	16,255.5	107.7	13.5	121.2	16,376.7	
R6	428.7	2,541.0	912.9	642.4	92.2	175,762.3	22,330.9	2,673.4	29,616.0	13,404.7	2,158.9	1,502.6	175.1	49.4	46,906.7	228.2	25.5	253.8	47,160.4	
R7	42.2	343.7	135.5	127.8	6.5	31,382.8	445.6	812.5	5,288.0	1,989.8	2,050.3	376.3	12.3	3.5	9,720.2	4.6	7.8	12.3	9,732.5	
R8	102.1	1,314.4	535.7	530.9	16.9	157,601.3	1,834.7	1,048.4	26,555.8	7,866.3	2,077.9	1,297.0	32.0	9.0	37,838.0	18.8	10.0	28.8	37,866.7	
HR2	25.5	113.3	46.1	58.2	2.8	8,544.8	707.7	0.0	1,439.8	676.2	407.5	212.1	5.2	1.5	2,742.4	7.2	0.0	7.2	2,749.6	
合計	6,479.3	66,495.7	27,044.0	37,891.4	953.0	6,644,155.2	210,335.2	60,335.4	1,119,540.2	397,086.9	155,363.3	65,154.1	1,810.6	510.8	1,739,465.9	2,149.6	576.2	2,725.8	1,742,191.7	

近道 ブロック	被害額（事業実施前H15）										水系名：由良川		河川名：由良川		流量規模：1/1				(百万円)					
	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対償	代替活動等	小計													
	償却	在庫	償却	在庫																				
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

近道 ブロック	被害額（事業実施前H15）						水系名：由良川				河川名：由良川				流量規模：1/2				(百万円)	
	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対 償	代替活動等	小計					
			償却	在庫	償却	在庫														
L1	1.8	0.0	0.0	0.0	0.0	0.0	1.8	5.6	3.7	9.3	3.1	0.1	0.0	0.0	0.0	0.0	0.0	0.1	14.2	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	1.1	0.2	0.0	0.0	0.0	0.0	1.2	0.0	0.7	0.7	2.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.1	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.3	0.0	0.0	0.0	0.0	0.0	0.3	2.8	10.4	13.1	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.0	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	3.1	0.2	0.0	0.0	0.0	0.0	3.4	8.6	15.2	23.8	5.7	0.1	0.0	0.0	0.0	0.0	0.0	0.1	33.0	

様式－３			被害額（事業実施前H15）					水系名：由良川				河川名：由良川				流量規模：1/3				(百万円)			
沿道 ブロック	一般資産被害額								農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	家屋における 応急対策費用												
			償却	在庫	償却	在庫					清掃労働対 価	代替活動等			小計								
L1	6.1	0.1	0.8	0.1	0.0	0.0	7.0	14.6	13.1	27.7	11.9	0.4	0.0	0.0	0.0	0.2	0.0	0.6	47.2				
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2				
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-6	2.3	0.2	0.6	0.3	0.0	0.0	3.4	1.4	0.0	1.4	5.7	0.3	0.0	0.1	0.1	0.2	0.0	0.5	11.0				
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.5	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6				
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1				
L1-11	0.8	1.4	1.7	0.4	0.0	0.0	4.2	0.7	2.7	3.4	7.1	0.2	0.1	0.1	0.2	0.3	0.0	0.6	15.3				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	10.2	1.0	0.0	0.0	0.0	0.0	11.2	1.6	10.0	11.6	19.0	0.0	0.1	0.2	0.3	0.0	0.0	0.3	42.0				
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1	1.1	0.4	0.0	0.0	0.0	0.0	1.5	35.7	25.4	61.1	2.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	65.3				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.5	0.0	2.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6				
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	0.4	0.0	0.0	0.0	0.0	0.0	0.4	0.0	0.0	0.0	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1				
R1-6	1.8	0.0	0.0	0.0	0.0	0.0	1.8	0.5	0.9	1.4	3.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.3				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6				
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	22.6	3.0	3.1	0.8	0.1	0.0	29.5	57.4	53.2	110.6	50.1	0.8	0.2	0.4	0.6	0.7	0.0	2.1	192.3				

様式－3		被害額（事業実施前H15）					水系名：由良川				河川名：由良川				流量規模：1/5				(百万円)		
沿道 ブロック	一般資産被害額							農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価										
			償却	在庫	償却	在庫					代替活動等			小計							
L1	16.6	0.8	2.8	0.4	0.1	0.0	20.7	35.2	25.1	60.3	35.1	1.0	0.0	0.0	0.1	0.8	0.0	1.8	117.8		
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	13.4	5.6	0.9	0.6	0.1	0.0	20.6	4.3	0.0	4.3	34.8	0.4	0.2	0.2	0.4	0.5	0.0	1.3	61.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.7	0.0	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.7		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2		
L1-5	10.0	1.7	2.4	0.8	0.1	0.0	15.0	5.4	0.4	5.8	25.3	0.7	0.1	0.2	0.3	0.6	0.0	1.6	47.6		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.9	0.9	0.0	0.0	1.8	0.8	0.3	1.1	3.1	0.4	0.0	0.0	0.0	0.4	0.0	0.9	6.8		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.0	1.3	6.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.3		
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3		
L1-10	6.4	3.2	3.5	1.0	0.0	0.0	14.1	2.8	3.5	6.3	23.9	0.4	0.1	0.2	0.3	0.8	0.0	1.5	45.7		
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-12	2.4	0.1	0.3	0.0	0.0	0.0	2.8	12.2	0.0	12.2	4.8	0.2	0.0	0.0	0.0	0.1	0.0	0.3	20.1		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	40.1	17.4	0.3	0.4	0.0	0.0	58.2	18.6	23.3	41.8	98.6	0.1	0.6	0.9	1.5	0.4	0.0	2.0	200.6		
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L7	4.6	0.8	0.3	0.2	0.0	0.0	5.8	59.5	39.7	99.2	9.9	0.1	0.1	0.1	0.1	0.1	0.0	0.3	115.2		
R1	0.2	0.0	0.0	0.0	0.0	0.0	0.2	1.5	0.0	1.5	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.0		
R1-1	0.9	0.2	0.0	0.0	0.0	0.0	1.1	5.1	0.0	5.1	1.9	0.0	0.0	0.1	0.1	0.0	0.0	0.1	8.2		
R1-2	20.9	17.9	0.7	0.7	0.4	0.2	40.7	6.6	0.0	6.6	68.9	0.2	0.7	0.7	1.4	0.7	0.0	2.3	118.4		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	1.4	0.0	0.2	0.1	0.0	0.0	1.7	0.3	0.2	0.4	2.8	0.0	0.0	0.0	0.0	0.1	0.0	0.1	5.1		
R1-5	4.1	0.0	0.0	0.0	0.0	0.0	4.1	3.8	1.9	5.7	6.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	16.7		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	11.7	7.5	0.4	0.0	0.1	0.1	19.9	7.5	7.1	14.6	33.7	0.1	0.3	0.5	0.8	0.1	0.0	1.0	69.1		
R4	6.6	2.1	0.6	0.2	0.0	0.0	9.5	11.9	3.4	15.4	16.1	0.6	0.1	0.1	0.2	0.2	0.0	1.0	42.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	139.2	57.3	13.0	5.5	0.7	0.3	216.1	181.4	106.4	287.8	366.1	4.1	2.2	3.0	5.1	4.8	0.0	14.0	884.0		

様式-3 被害額（事業実施前H15） 水系名：由良川 河川名：由良川 流量規模：1/10 （百万円）

形態 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	需要停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の関係被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			家屋における 応急対策費用								
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
L1	35.2	2.0	6.2	0.9	0.2	0.1	44.5	42.6	33.8	76.4	75.4	1.7	0.1	0.1	0.2	1.7	0.0	3.6	199.9		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	25.0	8.7	1.5	1.3	0.1	0.0	36.7	5.0	0.0	5.0	62.1	0.6	0.3	0.3	0.7	1.2	0.0	2.4	106.1		
L1-4	2.0	0.3	0.0	0.0	0.0	0.0	2.4	0.9	0.6	1.5	4.1	0.0	0.1	0.1	0.1	0.0	0.0	0.2	8.2		
L1-5	10.4	0.9	3.4	0.4	0.0	0.0	15.1	9.9	0.5	10.4	25.6	0.9	0.0	0.1	0.1	0.4	0.0	1.4	52.6		
L1-6	47.4	21.0	12.6	6.3	0.3	0.1	87.7	9.5	0.4	9.9	148.6	3.3	1.0	1.6	2.5	3.4	0.0	9.2	255.4		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.4	0.0	1.8	2.0	0.0	0.0	4.2	1.8	0.3	2.1	7.1	0.7	0.0	0.0	0.0	0.8	0.0	1.4	14.9		
L1-9	5.9	0.8	0.1	0.0	0.0	0.0	6.9	8.2	1.7	9.9	11.7	0.1	0.0	0.1	0.1	0.0	0.0	0.2	28.8		
L1-10	2.9	0.4	0.1	0.1	0.0	0.0	3.5	2.8	0.4	3.2	6.0	0.1	0.0	0.1	0.1	0.1	0.0	0.2	12.9		
L1-11	48.7	10.0	14.2	6.3	0.1	0.1	79.4	11.9	11.1	23.1	134.4	3.8	0.4	0.5	1.0	6.6	0.0	11.4	248.2		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1		
L2	88.3	34.7	3.4	0.7	0.1	0.0	127.2	14.3	0.0	14.3	215.4	1.2	1.2	1.4	2.6	1.2	0.0	5.0	361.9		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	19.5	2.4	3.1	1.1	0.0	0.0	26.1	0.0	0.0	0.0	44.2	1.6	0.4	0.7	1.1	0.8	0.0	3.5	73.8		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	205.8	65.9	1.7	2.0	0.4	0.2	276.0	41.3	42.7	84.0	467.6	0.8	4.0	6.6	10.6	1.4	0.0	12.8	840.3		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	21.0	5.9	1.2	1.0	0.1	0.1	29.3	87.2	57.3	144.5	49.6	0.3	0.3	0.4	0.7	0.5	0.0	1.5	224.8		
R1-1	7.6	5.3	1.1	0.9	0.0	0.0	14.9	9.6	2.0	11.6	25.2	0.5	0.2	0.3	0.5	0.3	0.0	1.4	53.1		
R1-2	5.0	2.3	0.0	0.0	0.1	0.0	7.4	8.0	0.3	8.4	12.5	0.0	0.1	0.2	0.3	0.0	0.0	0.3	28.5		
R1-3	29.6	24.1	0.8	0.9	0.5	0.2	56.1	6.9	0.0	6.9	95.0	0.3	0.9	0.8	1.7	1.0	0.0	2.9	160.9		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	5.8	0.8	0.4	0.2	0.0	0.0	7.3	1.3	0.3	1.6	12.4	0.1	0.0	0.1	0.1	0.3	0.0	0.5	21.8		
R1-6	14.9	0.2	0.0	0.0	0.1	0.0	15.1	4.4	2.4	6.8	25.6	0.0	0.0	0.0	0.1	0.0	0.0	0.1	47.5		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	21.1	18.9	1.1	0.0	0.3	0.1	41.6	8.8	9.4	18.2	70.4	0.2	0.7	1.0	1.7	0.3	0.0	2.2	132.3		
R5	35.6	10.6	3.2	1.0	0.1	0.0	50.5	25.6	6.1	31.7	85.6	2.4	0.5	0.9	1.4	0.9	0.0	4.7	172.5		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	632.2	215.3	55.9	25.2	2.3	0.9	931.8	300.1	169.4	469.5	1,578.4	18.5	10.3	15.2	25.4	20.8	0.0	64.6	3,044.3		

様式-3 被害額(事業実施前H15) 水系名: 由良川 河川名: 由良川 流量規模: 1/20 (百万円)

施設 ブロック	一般資産被害額										農作物被害額				公共土木施設等被害額	農業停止損失	家畜における必要対策費用			事業所における必要対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		生産家資産		小計	水稻	畑作物	小計	清掃労働対償	代給活動等	小計											
			償却	在庫	償却	在庫																		
L1	69.4	6.8	9.8	2.0	0.3	0.1	88.3	51.7	41.2	93.0	149.6	3.3	0.5	0.8	1.3	3.6	0.0	8.2	339.1					
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-3	27.0	9.1	1.6	1.4	0.1	0.0	39.2	5.3	0.0	5.3	66.4	0.6	0.3	0.4	0.7	1.2	0.0	2.6	113.4					
L1-4	18.0	7.1	0.3	0.2	0.2	0.1	25.8	1.8	1.3	3.0	43.7	0.2	0.3	0.6	0.9	0.3	0.0	1.3	73.9					
L1-5	96.8	10.3	40.7	4.8	0.2	0.1	153.0	17.0	0.7	17.7	259.1	7.7	0.5	0.8	1.3	5.2	0.0	14.2	444.0					
L1-6	131.6	85.0	34.8	18.8	0.9	0.4	271.4	11.3	0.6	11.9	459.7	8.0	3.1	4.0	7.1	9.5	0.0	24.6	767.5					
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.6	0.0	6.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.7					
L1-8	1.6	0.2	3.1	4.3	0.0	0.0	9.2	2.6	0.3	2.9	15.5	1.1	0.0	0.0	0.0	1.7	0.0	2.8	30.4					
L1-9	21.5	2.9	0.5	0.2	0.1	0.0	25.2	9.2	1.7	11.0	42.7	0.4	0.1	0.2	0.3	0.2	0.0	0.8	79.7					
L1-10	11.9	3.9	0.7	0.4	0.0	0.0	17.0	18.7	0.4	19.1	28.7	0.2	0.2	0.2	0.4	0.3	0.0	0.8	65.6					
L1-11	111.3	21.4	28.7	13.8	0.2	0.1	175.4	12.8	11.2	23.9	297.1	6.7	0.8	0.9	1.7	13.2	0.0	21.5	517.9					
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1					
L2	139.6	57.8	6.1	2.9	0.3	0.1	206.8	14.6	0.0	14.6	350.3	2.6	2.1	2.5	4.6	1.6	0.0	8.8	580.4					
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L4	21,934.6	10,949.1	10,023.7	2,719.0	10.0	4.2	45,640.6	20.9	4.9	25.8	77,315.2	2,420.4	449.1	699.4	1,108.5	1,602.7	0.0	5,131.6	128,113.1					
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L6	2,517.7	624.4	229.0	94.9	4.3	1.7	3,471.9	86.5	54.4	141.0	5,881.4	69.3	28.3	49.1	77.4	39.8	0.0	186.4	9,680.7					
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1	89.9	28.6	3.6	2.5	0.7	0.3	125.6	97.1	65.7	162.8	212.7	1.1	1.2	1.8	3.0	1.9	0.0	6.1	507.1					
R1-1	14.1	10.5	2.3	1.9	0.0	0.0	28.9	11.6	2.4	14.0	49.0	1.1	0.4	0.5	0.9	0.7	0.0	2.7	94.6					
R1-2	18.9	17.7	0.1	0.1	0.5	0.2	37.4	9.5	1.3	10.8	63.3	0.0	0.7	0.9	1.6	0.1	0.0	1.7	113.2					
R1-3	53.8	42.3	1.1	1.4	1.0	0.4	100.0	7.4	0.0	7.4	169.5	0.5	1.5	1.4	2.9	1.7	0.0	5.1	281.9					
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-5	11.5	2.6	0.9	0.5	0.0	0.0	15.4	3.3	0.3	3.6	26.1	0.2	0.1	0.1	0.2	0.7	0.0	1.1	46.3					
R1-6	30.0	1.0	0.0	0.0	0.1	0.0	31.2	5.1	2.7	7.8	52.9	0.0	0.0	0.1	0.1	0.0	0.0	0.1	92.0					
R2	1.4	0.3	0.0	0.0	0.0	0.0	1.6	0.0	0.0	0.0	2.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.4					
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R4	71.7	43.6	2.5	0.1	0.6	0.2	118.7	10.2	11.2	21.5	201.0	0.4	1.8	2.2	4.0	0.8	0.0	5.2	346.3					
R5	114.4	40.2	12.1	4.2	0.6	0.2	171.6	27.4	6.7	34.1	290.6	7.3	1.6	2.4	3.9	2.9	0.0	14.1	510.3					
R6	156.2	81.4	14.3	5.5	0.6	0.3	258.3	0.0	0.0	0.0	437.5	2.7	3.0	4.4	7.4	1.6	0.0	11.6	707.4					
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
合計	25,642.8	12,046.1	10,415.6	2,878.8	20.5	8.4	51,012.3	430.6	207.0	637.7	86,414.7	2,533.5	495.6	732.5	1,228.1	1,689.6	0.0	5,451.3	143,515.9					

表式－3		被害額（事業実施前H15）						水系名：由良川			河川名：由良川			流量規模：1/50				（百万円）			
地区 ブロック	一般資産被害額							農作物被害額			公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の関係被害者	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価 代替活動等			小計					
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
L1	258.8	69.0	19.7	5.4	1.5	0.6	354.9	61.3	46.0	107.3	601.2	6.6	2.7	4.1	6.7	8.0	0.0	21.4	1,084.7		
L1-1	6.2	1.1	0.5	0.3	0.0	0.0	8.1	0.0	0.0	0.0	13.7	0.2	0.2	0.3	0.4	0.2	0.0	0.9	22.7		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	78.5	27.0	5.1	2.6	0.2	0.1	113.4	5.9	0.0	5.9	192.1	2.5	1.1	1.4	2.5	3.2	0.0	8.3	319.7		
L1-4	49.9	22.6	1.2	0.7	0.5	0.2	75.0	2.2	1.6	3.7	127.1	0.6	0.8	1.2	2.0	0.8	0.0	3.4	209.2		
L1-5	212.0	45.8	73.2	11.7	0.8	0.3	343.8	18.3	0.9	19.2	582.4	13.0	1.6	2.0	3.6	11.0	0.0	27.6	973.0		
L1-6	359.8	208.5	89.4	56.1	2.5	1.0	717.2	12.8	0.7	13.5	1,214.9	22.0	7.5	8.1	15.6	28.9	0.0	66.5	2,012.1		
L1-7	7.7	6.8	6.1	1.3	0.1	0.0	22.0	13.0	0.0	13.0	37.2	2.4	0.4	0.8	1.3	1.5	0.0	5.2	77.4		
L1-8	34.0	9.5	5.9	7.4	0.2	0.1	57.2	4.2	0.3	4.5	96.9	2.4	0.5	0.8	1.3	3.9	0.0	7.6	166.2		
L1-9	70.6	14.1	3.0	3.3	0.4	0.2	91.5	9.9	1.8	11.8	155.0	1.6	0.5	0.6	1.1	1.0	0.0	3.7	262.0		
L1-10	23.7	13.4	3.3	1.9	0.1	0.0	42.3	20.4	0.4	20.7	71.6	0.9	0.5	0.7	1.2	0.9	0.0	3.0	137.7		
L1-11	379.6	86.1	66.5	37.3	0.6	0.2	570.3	13.1	11.7	24.8	966.0	18.3	3.3	4.4	7.7	31.6	0.0	57.5	1,618.6		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3		
L2	319.0	126.7	16.7	11.8	1.0	0.4	475.7	19.8	0.0	19.8	805.8	6.3	4.7	5.1	9.8	3.8	0.0	19.9	1,321.3		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	80,416.9	40,466.6	33,387.3	11,360.7	31.8	11.8	165,675.0	23.2	5.1	28.2	280,653.5	7,336.5	1,608.1	1,377.3	2,985.4	7,019.1	0.0	17,341.0	463,697.7		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	10,203.5	4,745.8	1,087.7	463.1	17.5	6.9	16,524.5	99.6	61.5	161.1	27,992.5	277.2	179.1	202.4	381.5	257.3	0.0	916.0	45,594.1		
L7	9,999.7	3,388.2	1,795.9	778.3	10.4	3.9	15,976.4	30.7	8.7	39.3	27,064.0	435.7	130.2	155.8	286.0	230.5	0.0	952.2	44,031.9		
R1	337.9	111.1	12.3	9.4	2.9	1.3	475.0	105.1	70.3	175.4	804.6	3.6	4.4	5.3	9.7	8.4	0.0	21.7	1,476.6		
R1-1	58.9	32.8	10.9	9.3	0.1	0.0	112.0	11.9	3.7	15.5	189.8	5.6	1.4	1.9	3.3	3.4	0.0	12.3	329.6		
R1-2	71.3	70.4	2.4	0.6	2.2	0.9	147.8	11.4	1.3	12.7	250.5	1.1	3.0	4.5	7.4	0.6	0.0	9.1	420.2		
R1-3	93.5	71.5	2.1	2.5	1.6	0.6	171.8	7.7	0.0	7.7	291.0	0.9	2.6	2.4	5.1	2.7	0.0	8.6	479.2		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	135.4	33.4	5.6	2.0	0.4	0.2	176.9	9.2	1.1	10.3	299.6	1.5	1.2	1.7	2.9	3.1	0.0	7.6	494.4		
R1-6	94.0	9.3	0.1	0.1	0.4	0.2	104.0	7.2	3.0	10.2	176.2	0.1	0.4	0.5	0.9	0.1	0.0	1.0	291.5		
R2	4.0	0.8	0.0	0.0	0.0	0.0	4.8	0.0	0.0	0.0	8.2	0.0	0.0	0.0	0.1	0.0	0.0	0.1	13.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	132.1	82.0	3.9	0.2	1.2	0.5	219.9	10.6	12.1	22.8	372.5	0.6	3.0	3.4	6.3	1.4	0.0	8.3	623.4		
R5	363.7	128.7	39.1	17.9	1.8	0.7	551.8	28.4	6.9	35.3	934.8	18.8	4.8	5.8	10.6	10.4	0.0	39.8	1,561.8		
R6	2,879.6	2,258.1	658.6	315.9	20.5	8.1	6,140.8	73.5	3.9	77.4	10,402.5	152.8	81.9	76.1	158.0	208.7	0.0	519.6	17,140.2		
R7	350.2	213.5	201.3	25.4	0.6	0.3	791.2	0.0	5.8	5.8	1,340.2	14.3	7.8	8.8	16.5	16.3	0.0	47.1	2,184.3		
R8	3,055.9	1,351.0	784.3	382.9	2.6	1.2	5,577.9	7.2	6.3	13.5	9,448.9	136.8	50.5	56.5	107.0	72.7	0.0	316.5	15,356.8		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	109,996.3	53,593.5	38,291.9	13,508.2	101.7	39.5	215,521.1	606.8	252.9	859.7	365,092.9	8,462.4	2,102.0	1,931.8	4,033.8	7,929.6	0.0	20,425.8	601,899.6		

様式－３			被害額（事業実施前H15）										水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)	
地区 ブロック	一般資産被害額								農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考				
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価 代替活動等															
			償却	在庫	償却	在庫					小計	清掃労働対価			代替活動等	小計										
L1	789.4	294.1	47.8	14.2	5.5	2.1	1,153.0	66.9	47.0	113.9	1,953.3	16.3	11.3	13.9	25.1	24.1	0.0	65.5	3,285.7							
L1-1	21.1	3.7	2.0	0.9	0.0	0.0	27.7	2.4	0.0	2.4	47.0	0.8	0.5	1.0	1.5	0.9	0.0	3.2	80.2							
L1-2	23.3	11.5	0.4	0.0	0.1	0.0	35.4	0.0	0.0	0.0	59.9	0.1	0.5	0.9	1.4	0.4	0.0	2.0	97.2							
L1-3	191.8	68.8	14.2	4.6	0.6	0.2	280.3	6.1	0.0	6.1	474.8	6.0	2.7	3.8	6.5	6.1	0.0	18.6	779.8							
L1-4	125.5	58.3	3.6	2.0	1.1	0.4	190.8	2.5	1.7	4.2	323.2	1.3	2.2	2.6	4.8	2.3	0.0	8.4	526.6							
L1-5	424.1	101.0	116.7	20.5	1.7	0.7	664.7	19.5	0.9	20.5	1,126.0	24.0	3.6	3.7	7.3	20.8	0.0	52.0	1,863.1							
L1-6	717.8	439.7	151.6	108.5	4.7	1.8	1,424.1	13.3	0.7	14.0	2,412.4	41.8	16.4	14.9	31.3	57.7	0.0	130.8	3,981.4							
L1-7	101.1	88.2	35.5	10.0	0.8	0.3	236.0	17.8	0.1	17.9	399.7	9.7	3.0	4.1	7.1	9.9	0.0	26.8	680.3							
L1-8	256.1	117.9	17.4	13.6	1.8	0.8	407.5	5.1	0.3	5.4	690.3	6.1	4.4	5.4	9.7	11.3	0.0	27.2	1,130.3							
L1-9	181.3	41.9	7.9	11.5	0.9	0.4	243.9	10.1	1.9	12.0	413.2	3.8	1.6	1.7	3.3	3.1	0.0	10.2	679.3							
L1-10	56.5	50.5	15.4	9.5	0.2	0.1	132.1	21.7	1.0	22.6	223.8	4.5	2.1	2.4	4.5	3.7	0.0	12.8	391.3							
L1-11	1,413.2	508.2	248.6	131.0	1.9	0.8	2,303.6	14.0	11.9	25.9	3,902.3	66.9	18.9	22.8	41.6	103.9	0.0	212.4	6,444.2							
L1-12	112.1	29.4	1.8	0.8	0.3	0.1	144.5	3.5	0.0	3.5	244.8	0.7	1.5	2.8	4.3	1.9	0.0	6.9	399.7							
L2	629.6	268.4	38.6	32.1	2.7	1.1	972.5	21.0	0.0	21.0	1,647.4	14.2	9.8	9.7	19.5	8.8	0.0	42.5	2,683.4							
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L4	154,983.0	62,498.0	47,700.1	17,187.6	50.4	17.4	282,436.4	23.7	5.1	28.8	478,447.3	13,537.3	2,574.3	1,770.1	4,344.4	10,900.1	0.0	28,781.8	789,694.2							
L5	24,636.9	9,024.6	4,298.8	2,435.8	14.2	5.0	40,415.2	14.4	4.6	19.0	68,463.4	1,106.2	329.3	258.0	587.3	717.1	0.0	2,410.6	111,308.2							
L6	18,422.8	9,017.2	1,771.7	797.8	36.2	14.3	30,060.0	111.1	63.9	175.0	50,921.6	435.3	320.8	310.6	631.3	438.3	0.0	1,504.9	82,661.4							
L7	13,380.2	5,355.0	2,594.5	1,172.5	11.3	4.3	22,517.9	39.1	11.1	50.2	38,145.3	637.4	207.0	252.4	459.4	285.2	0.0	1,392.1	62,105.4							
R1	1,082.9	402.6	26.8	22.5	9.6	3.6	1,547.9	113.5	72.7	186.2	2,622.2	9.0	15.1	17.2	32.3	21.5	0.0	62.9	4,419.3							
R1-1	119.2	80.2	22.9	20.1	0.2	0.1	242.6	12.2	4.1	16.3	410.9	10.3	2.6	3.4	6.0	7.3	0.0	23.6	693.3							
R1-2	173.2	216.4	6.4	2.2	4.9	2.1	405.2	12.0	1.3	13.3	686.3	2.0	7.8	8.7	16.4	1.6	0.0	20.0	1,124.8							
R1-3	142.7	121.2	3.6	4.5	2.6	1.0	275.6	8.0	0.0	8.0	466.9	1.4	4.4	3.9	8.2	4.8	0.0	14.5	765.0							
R1-4	14.2	3.2	0.0	0.0	0.1	0.0	17.5	2.3	0.0	2.3	29.7	0.0	0.1	0.2	0.3	0.0	0.0	0.3	49.8							
R1-5	605.4	171.4	26.9	11.0	1.9	0.7	817.3	10.1	1.2	11.3	1,384.5	7.2	6.8	7.6	14.4	17.2	0.0	38.7	2,251.9							
R1-6	286.5	44.1	1.1	0.9	1.2	0.5	334.2	8.8	3.2	12.0	566.1	0.5	1.8	2.5	4.3	1.3	0.0	6.1	918.3							
R2	47.7	5.5	1.3	0.1	0.2	0.1	54.9	0.1	0.0	0.1	92.9	0.3	0.3	0.4	0.7	0.2	0.0	1.2	149.0							
R3	3,935.7	2,111.3	180.0	119.8	17.1	6.2	6,370.1	42.3	20.1	62.4	10,790.9	50.3	77.2	67.6	144.7	99.7	0.0	294.7	17,518.1							
R4	309.8	151.7	6.5	0.3	2.2	0.9	471.5	10.9	12.2	23.1	796.7	1.0	5.6	5.8	11.4	2.6	0.0	15.0	1,308.3							
R5	880.5	281.6	63.9	24.3	4.2	1.6	1,256.0	30.8	7.1	37.9	2,127.6	32.4	10.1	9.8	19.9	16.3	0.0	68.6	3,490.1							
R6	4,684.6	3,412.7	824.7	451.9	32.4	11.5	9,417.8	95.1	8.7	103.8	15,953.7	221.0	119.7	96.7	216.4	302.3	0.0	739.6	26,215.0							
R7	728.1	433.7	379.0	54.4	1.3	0.5	1,597.1	0.0	6.0	6.0	2,705.4	27.6	15.5	14.0	29.5	33.1	0.0	90.2	4,398.7							
R8	6,892.6	3,061.5	1,281.9	738.8	6.1	2.2	11,983.0	8.3	6.6	14.9	20,299.1	259.1	106.5	88.1	194.6	157.7	0.0	611.4	32,908.3							
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
合計	236,368.9	98,473.6	59,891.5	23,403.5	217.9	80.6	418,436.0	746.6	293.4	1,040.0	708,830.5	16,534.6	3,883.3	3,006.4	6,889.6	13,271.1	0.0	36,695.3	1,165,001.7							

[illegible]

様式－3			被害額（現況H26）				水系名：由良川				河川名：由良川				流量規模：1/10				(百万円)			
沿道 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対 価									
			償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計							
L1	28.0	0.0	5.8	0.8	0.1	0.1	34.8	42.4	34.0	76.4	59.0	1.6	0.0	0.0	0.0	1.3	0.0	2.9	173.1			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	25.0	8.7	1.5	1.3	0.1	0.0	36.7	5.0	0.0	5.0	62.1	0.6	0.3	0.3	0.7	1.2	0.0	2.4	106.1			
L1-4	2.0	0.3	0.0	0.0	0.0	0.0	2.4	0.7	0.4	1.1	4.0	0.0	0.1	0.1	0.1	0.0	0.0	0.2	7.6			
L1-5	16.3	1.5	6.8	0.5	0.0	0.0	25.2	13.7	0.5	14.1	42.6	1.8	0.1	0.1	0.2	0.8	0.0	2.7	84.6			
L1-6	38.7	20.0	9.5	5.2	0.2	0.1	73.7	12.2	0.0	12.2	124.8	2.4	0.8	1.3	2.1	2.6	0.0	7.1	217.8			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.4	0.0	1.7	2.0	0.0	0.0	4.1	2.3	0.3	2.6	7.0	0.6	0.0	0.0	0.0	0.8	0.0	1.4	15.1			
L1-9	2.1	0.1	0.1	0.0	0.0	0.0	2.2	7.8	1.7	9.5	3.8	0.1	0.0	0.0	0.1	0.0	0.0	0.2	15.7			
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-11	55.4	11.3	16.4	7.0	0.1	0.1	90.2	12.5	11.3	23.7	152.8	4.1	0.5	0.6	1.0	7.1	0.0	12.2	278.9			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	591.9	263.6	4.9	6.8	5.0	2.0	874.2	39.6	35.7	75.2	1,480.9	2.2	10.2	16.3	26.4	3.3	0.0	31.9	2,462.3			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	18.8	3.6	1.1	0.9	0.0	0.0	24.5	86.2	57.1	143.2	41.5	0.3	0.2	0.3	0.5	0.4	0.0	1.1	210.4			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	0.3	0.6	0.0	0.0	0.0	0.0	1.0	5.1	0.3	5.4	1.7	0.0	0.1	0.2	0.3	0.0	0.0	0.3	8.4			
R1-3	29.6	24.1	0.8	0.9	0.5	0.2	56.1	6.9	0.0	6.9	95.0	0.3	0.9	0.8	1.7	1.0	0.0	2.9	160.9			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	21.1	17.7	1.1	0.0	0.3	0.1	40.3	8.7	8.6	17.2	68.3	0.2	0.7	0.9	1.6	0.3	0.0	2.1	128.0			
R5	31.4	10.1	3.1	1.0	0.1	0.0	45.7	25.2	6.0	31.2	77.4	2.4	0.5	0.8	1.2	0.8	0.0	4.4	158.8			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	861.0	361.8	52.7	26.5	6.5	2.6	1,311.0	268.4	156.1	424.4	2,220.9	16.5	14.2	21.6	35.8	19.5	0.0	71.8	4,028.1			

様式－3			被害額（現況H26）				水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)				
沿道 ブロック	家屋	家庭用品	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価	代替活動等			小計								
			償却	在庫	償却	在庫																	
L1	53.7	1.8	9.4	1.8	0.2	0.1	67.0	51.7	41.4	93.1	113.5	3.1	0.2	0.4	0.6	2.9	0.0	6.6	280.2				
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	29.3	9.6	1.9	1.4	0.1	0.0	42.2	5.3	0.0	5.3	71.5	0.8	0.4	0.5	0.9	1.3	0.0	2.9	122.0				
L1-4	12.8	5.4	0.2	0.2	0.1	0.1	18.8	1.6	1.1	2.7	31.9	0.1	0.2	0.4	0.6	0.2	0.0	0.9	54.2				
L1-5	104.5	12.0	44.0	5.3	0.2	0.1	166.2	17.5	0.7	18.2	281.5	8.2	0.6	0.9	1.5	5.7	0.0	15.4	481.3				
L1-6	128.1	80.1	33.5	18.1	0.8	0.4	261.0	15.1	0.7	15.9	442.1	7.9	3.0	3.9	6.8	9.2	0.0	23.9	742.9				
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.5	0.0	5.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.6				
L1-8	1.1	0.1	3.0	4.3	0.0	0.0	8.5	3.1	0.3	3.5	14.4	1.0	0.0	0.0	0.0	1.7	0.0	2.7	29.1				
L1-9	9.3	1.8	0.3	0.1	0.1	0.0	11.5	9.0	1.7	10.8	19.4	0.2	0.1	0.1	0.1	0.1	0.0	0.4	42.0				
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-11	125.8	26.9	36.8	21.6	0.2	0.1	211.4	13.5	12.0	25.5	358.2	9.0	0.9	1.0	1.9	21.7	0.0	32.7	627.8				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	21,619.5	10,768.6	9,863.8	2,963.8	9.8	4.2	44,929.6	20.8	4.9	25.7	76,110.8	2,397.0	441.9	654.1	1,095.9	1,576.7	0.0	5,069.7	126,135.8				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	3,122.1	938.4	256.7	107.8	9.7	3.8	4,438.4	88.4	48.7	137.1	7,518.7	74.5	38.2	63.9	102.0	45.1	0.0	221.5	12,315.7				
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1	62.2	16.6	2.8	2.5	0.3	0.1	84.5	97.2	65.3	162.5	143.1	0.8	0.7	1.0	1.7	1.0	0.0	3.4	393.5				
R1-1	2.8	0.3	0.3	0.1	0.0	0.0	3.4	1.8	0.1	2.0	5.8	0.3	0.0	0.1	0.1	0.1	0.0	0.5	11.8				
R1-2	5.5	11.9	0.0	0.0	0.4	0.2	18.1	5.8	1.3	7.0	30.6	0.0	0.5	0.8	1.3	0.0	0.0	1.3	57.0				
R1-3	53.8	42.3	1.1	1.4	1.0	0.4	100.0	7.3	0.0	7.3	169.5	0.5	1.5	1.4	2.9	1.7	0.0	5.1	281.9				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3				
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	71.0	41.6	2.4	0.1	0.5	0.2	115.8	10.2	11.2	21.4	196.2	0.4	1.7	2.2	3.9	0.8	0.0	5.1	336.5				
R5	67.0	24.9	8.6	3.0	0.2	0.1	103.7	26.3	6.7	33.0	175.7	6.6	1.0	1.5	2.5	2.1	0.0	11.3	323.7				
R6	722.8	613.2	187.7	62.0	6.6	2.7	1,594.9	50.2	0.7	51.0	2,701.8	53.7	23.6	34.9	58.5	52.7	0.0	164.9	4,512.5				
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	26,191.3	12,595.4	10,452.4	2,893.3	30.3	12.5	52,175.2	430.5	197.2	627.7	88,384.7	2,564.0	514.5	766.8	1,281.3	1,722.8	0.0	5,568.2	146,755.8				

形式－3		被害額（現況H26）					水系名：由良川					河川名：由良川					流量規模：1/50					（百万円）		
地区 ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価		代替活動等			小計								
			償却	在庫	償却	在庫					清掃労働対 価	代替活動等												
L1	144.5	19.2	17.8	4.7	0.7	0.3	187.3	61.8	46.4	108.1	317.2	5.9	0.8	1.4	2.2	6.3	0.0	14.4	627.0					
L1-1	6.2	1.1	0.5	0.3	0.0	0.0	8.1	0.0	0.0	0.0	13.7	0.2	0.2	0.3	0.4	0.2	0.0	0.9	22.7					
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-3	78.5	27.0	5.1	2.6	0.2	0.1	113.4	5.9	0.0	5.9	192.1	2.5	1.1	1.4	2.5	3.2	0.0	8.3	319.8					
L1-4	48.5	22.6	1.1	0.7	0.5	0.2	73.5	1.9	1.6	3.6	124.5	0.6	0.8	1.2	2.0	0.8	0.0	3.3	204.9					
L1-5	233.3	46.6	78.5	12.2	0.8	0.3	371.6	18.6	0.9	19.6	629.6	14.7	1.6	2.0	3.6	12.3	0.0	30.6	1,051.4					
L1-6	327.6	199.0	79.6	49.4	2.2	0.9	658.7	16.7	0.8	17.5	1,115.9	19.6	7.3	7.8	15.1	25.4	0.0	60.1	1,852.2					
L1-7	6.9	5.4	5.3	1.1	0.1	0.0	18.7	11.9	0.0	11.9	31.6	2.0	0.4	0.7	1.1	1.2	0.0	4.2	66.4					
L1-8	24.9	5.7	5.2	7.1	0.1	0.1	43.1	5.4	0.5	5.8	73.0	2.3	0.3	0.6	0.9	3.6	0.0	6.8	128.7					
L1-9	58.7	10.4	2.0	2.0	0.3	0.1	73.5	9.8	1.8	11.7	124.5	1.3	0.4	0.5	0.9	0.7	0.0	2.9	212.5					
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-11	642.4	181.1	112.7	66.0	0.9	0.4	1,003.6	19.2	15.3	34.5	1,700.1	33.4	7.1	9.8	17.0	58.3	0.0	108.6	2,846.7					
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3					
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L4	79,985.1	40,280.4	33,265.3	11,305.2	31.7	11.8	164,879.4	23.2	5.1	28.2	279,305.7	7,303.2	1,600.5	1,374.2	2,974.7	6,973.2	0.0	17,251.1	461,464.5					
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L6	10,514.6	5,009.8	1,091.7	468.8	22.1	9.0	17,116.0	99.1	54.2	153.3	28,994.5	278.8	186.2	211.1	397.3	259.6	0.0	935.7	47,199.4					
L7	9,999.7	3,388.2	1,795.9	778.3	10.4	3.9	15,976.4	30.7	8.7	39.4	27,064.0	435.7	130.2	155.8	286.0	230.5	0.0	952.2	44,032.0					
R1	213.9	53.9	7.9	7.2	1.5	0.7	285.0	106.0	71.7	177.7	482.8	2.3	2.1	2.6	4.7	3.3	0.0	10.4	956.0					
R1-1	64.3	36.1	11.0	9.4	0.1	0.0	121.0	15.3	5.9	21.2	204.9	5.6	1.4	2.1	3.5	3.5	0.0	12.6	359.7					
R1-2	108.3	110.6	3.7	1.2	3.0	1.2	227.9	15.4	1.3	16.7	386.1	1.4	4.0	5.6	9.5	0.9	0.0	11.8	642.5					
R1-3	91.9	71.0	2.0	2.5	1.6	0.6	169.5	7.6	0.0	7.6	287.2	0.9	2.6	2.3	4.9	2.6	0.0	8.3	472.6					
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-5	49.8	9.7	0.5	0.1	0.2	0.1	60.4	5.2	0.7	5.9	102.2	0.1	0.4	0.6	1.0	0.3	0.0	1.3	169.7					
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R4	132.1	82.0	3.9	0.2	1.2	0.5	219.9	10.6	12.0	22.6	372.5	0.6	3.0	3.4	6.3	1.4	0.0	8.3	623.2					
R5	525.1	167.5	42.1	17.5	2.9	1.1	756.1	29.9	6.9	36.8	1,280.7	18.8	6.0	6.5	12.5	10.9	0.0	42.2	2,115.8					
R6	2,965.2	2,306.7	666.9	321.9	20.9	8.2	6,289.7	77.2	4.0	81.2	10,654.8	154.9	83.5	77.2	160.7	212.3	0.0	528.0	17,553.6					
R7	350.2	213.5	201.3	25.4	0.6	0.3	791.2	0.0	5.8	5.8	1,340.2	14.3	7.8	8.8	16.5	16.3	0.0	47.1	2,184.3					
R8	3,055.9	1,351.0	784.3	382.9	2.6	1.2	5,577.9	7.2	6.3	13.5	9,448.9	136.8	50.5	56.5	107.0	72.7	0.0	316.5	15,356.8					
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
合計	109,627.3	53,598.4	38,184.1	13,466.5	104.7	40.8	215,021.7	579.0	249.7	828.6	364,246.8	8,435.7	2,098.1	1,932.1	4,030.3	7,899.5	0.0	20,365.4	600,462.6					

表式－3			被害額（現況H26）				水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)			
地区 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対 価	代替活動等	小計							
			償却	在庫	償却	在庫																
L1	511.3	132.9	46.7	13.0	3.4	1.3	708.6	67.8	47.3	115.1	1,200.4	15.4	6.0	9.6	15.6	17.6	0.0	48.7	2,072.7			
L1-1	22.3	4.0	2.1	0.9	0.0	0.0	29.3	2.4	0.0	2.4	49.7	0.9	0.6	1.1	1.6	0.9	0.0	3.4	84.8			
L1-2	15.1	6.0	0.3	0.0	0.0	0.0	21.4	0.0	0.0	0.0	36.2	0.1	0.4	0.7	1.0	0.3	0.0	1.4	59.0			
L1-3	222.4	84.9	16.8	5.8	0.8	0.3	331.0	6.3	0.0	6.3	560.7	6.6	3.0	4.3	7.3	7.2	0.0	21.2	919.1			
L1-4	117.2	55.3	3.2	1.9	1.0	0.4	178.9	2.3	1.8	4.0	303.1	1.2	2.1	2.3	4.4	2.2	0.0	7.8	493.9			
L1-5	433.8	102.4	120.7	21.0	1.7	0.7	680.3	20.1	0.9	21.0	1,152.5	24.6	3.6	3.8	7.4	21.4	0.0	53.4	1,907.2			
L1-6	647.1	401.7	144.8	101.1	4.4	1.7	1,300.8	17.3	0.9	18.2	2,203.5	38.4	14.9	14.0	28.9	53.6	0.0	120.8	3,643.2			
L1-7	90.1	80.2	32.9	9.2	0.7	0.3	213.4	17.1	0.1	17.2	361.5	9.3	2.8	4.0	6.8	9.5	0.0	25.5	617.5			
L1-8	181.4	74.9	14.5	12.0	1.2	0.5	284.4	5.6	0.4	6.0	481.8	5.4	3.1	4.2	7.2	9.1	0.0	21.7	794.0			
L1-9	158.5	35.4	7.5	10.8	0.8	0.3	213.4	10.1	1.9	12.0	361.4	3.6	1.3	1.4	2.7	2.8	0.0	9.1	595.9			
L1-10	1.8	2.1	1.3	0.3	0.0	0.0	5.5	0.0	0.5	0.5	9.4	0.4	0.1	0.1	0.2	0.3	0.0	0.9	16.3			
L1-11	2,110.3	743.0	333.6	185.3	2.7	1.1	3,376.0	19.9	15.2	35.2	5,718.9	90.0	26.7	28.7	55.4	137.1	0.0	282.5	9,412.6			
L1-12	113.3	32.0	1.9	0.8	0.3	0.1	148.3	3.5	0.0	3.5	251.3	0.8	1.6	2.8	4.4	1.9	0.0	7.1	410.2			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	154,927.3	62,492.8	47,699.5	17,187.3	50.3	17.3	282,374.6	23.7	5.1	28.8	478,342.5	13,537.2	2,574.0	1,770.0	4,344.0	10,899.8	0.0	28,781.0	789,526.9			
L5	24,506.4	8,950.6	4,293.0	2,428.8	14.1	5.0	40,197.8	14.2	4.6	18.8	68,095.0	1,102.4	327.1	257.2	584.3	714.2	0.0	2,400.9	110,712.5			
L6	18,117.1	8,911.6	1,753.9	787.7	36.4	14.5	29,621.2	110.2	56.0	166.2	50,178.2	431.9	317.9	308.2	626.1	434.4	0.0	1,492.4	81,458.0			
L7	13,361.7	5,348.8	2,592.4	1,171.5	11.3	4.3	22,490.0	39.1	11.1	50.2	38,098.0	636.9	206.7	251.9	458.6	294.9	0.0	1,390.5	62,028.6			
R1	817.6	240.1	21.6	18.6	6.3	2.4	1,106.7	115.0	73.9	188.9	1,874.7	7.3	9.9	12.8	22.7	12.4	0.0	42.3	3,212.7			
R1-1	142.1	95.0	28.6	27.7	0.2	0.1	293.6	15.7	5.9	21.6	497.4	12.0	3.4	3.9	7.2	9.5	0.0	28.8	841.5			
R1-2	250.8	261.7	10.3	3.9	5.7	2.4	534.7	16.1	1.3	17.4	905.8	2.9	9.9	10.0	19.9	2.7	0.0	25.6	1,483.5			
R1-3	142.7	121.2	3.6	4.5	2.6	1.0	275.6	8.0	0.0	8.0	466.9	1.4	4.4	3.9	8.2	4.8	0.0	14.5	765.0			
R1-4	8.8	0.6	0.0	0.0	0.0	0.0	9.5	2.3	0.0	2.3	16.1	0.0	0.0	0.1	0.1	0.0	0.0	0.1	28.0			
R1-5	417.3	113.9	17.3	6.4	1.4	0.6	556.9	10.2	1.3	11.5	943.3	4.0	4.3	5.1	9.4	9.7	0.0	23.2	1,534.8			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	3,865.1	2,081.3	177.4	116.8	17.0	6.2	6,263.6	42.3	20.1	62.4	10,610.6	49.3	76.0	66.9	142.8	97.2	0.0	289.4	17,226.0			
R4	375.3	167.9	7.1	0.4	2.5	1.0	554.1	10.9	12.2	23.1	938.7	1.1	6.3	6.4	12.6	2.8	0.0	16.5	1,532.4			
R5	888.0	274.1	63.4	23.0	4.3	1.6	1,254.5	30.7	7.2	37.9	2,125.2	31.3	9.8	9.7	19.6	15.0	0.0	65.9	3,483.5			
R6	4,856.6	3,524.8	838.1	465.0	33.5	11.8	9,729.8	95.4	8.9	104.2	16,482.3	228.5	123.4	98.2	221.6	312.3	0.0	762.3	27,078.6			
R7	728.1	433.7	379.0	54.4	1.3	0.5	1,597.1	0.0	6.1	6.1	2,705.4	27.6	15.5	14.0	29.5	33.1	0.0	90.2	4,398.7			
R8	6,892.6	3,061.5	1,281.9	738.8	6.1	2.2	11,983.0	8.3	6.6	14.9	20,299.1	259.1	106.5	88.1	194.6	157.7	0.0	611.4	32,908.3			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	234,921.6	97,834.4	59,893.4	23,397.2	209.8	77.6	416,334.0	714.3	289.1	1,003.4	705,269.8	16,529.6	3,861.1	2,983.1	6,844.2	13,264.4	0.0	36,638.2	1,159,245.4			

[illegible][illegible]

様式－３			被害額（緊急水防災整備H27）										水系名：由良川				河川名：由良川				流量規模：1/3				(百万円)	
地区 ブロック	一般資産被害額							農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用				事業所における応急対策費用	その他の間接被害	小計	合計	備考					
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計											
			償却	在庫	償却	在庫																				
L1	5.8	0.0	0.7	0.1	0.0	0.0	6.7	14.4	12.0	26.3	11.3	0.4	0.0	0.0	0.0	0.2	0.0	0.6	44.9							
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.5	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6							
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L6	0.1	0.0	0.0	0.0	0.0	0.0	0.1	0.8	0.9	1.7	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.1							
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R1	1.1	0.4	0.0	0.0	0.0	0.0	1.5	35.2	24.9	60.1	2.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	64.3							
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.4	0.0	2.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.4							
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
合計	7.1	0.4	0.8	0.1	0.0	0.0	8.4	53.0	38.2	91.2	14.2	0.4	0.0	0.0	0.0	0.2	0.0	0.6	114.3							

様式－３		被害額（緊急水防災整備H27）										水系名：由良川				河川名：由良川				流量規模：1/5				(百万円)	
地区 ブロック	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価		代替活動等	小計											
			償却	在庫	償却	在庫																			
L1	14.6	0.0	2.6	0.4	0.1	0.0	17.6	35.1	25.5	60.6	29.9	0.9	0.0	0.0	0.0	0.6	0.0	1.5	109.7						
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-2	13.4	5.6	0.9	0.6	0.1	0.0	20.6	4.4	0.0	4.4	34.8	0.4	0.2	0.2	0.4	0.5	0.0	1.3	61.1						
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.5	1.3	5.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.8						
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L5	24.7	11.6	0.2	0.4	0.0	0.0	36.9	18.1	20.7	38.8	62.6	0.1	0.5	0.7	1.2	0.4	0.0	1.7	139.9						
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L7	3.0	0.6	0.3	0.1	0.0	0.0	4.0	53.4	38.0	91.3	6.8	0.1	0.0	0.0	0.0	0.1	0.0	0.2	102.3						
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-1	0.1	0.0	0.0	0.0	0.0	0.0	0.1	2.9	0.0	2.9	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.1						
R1-2	20.9	17.9	0.7	0.7	0.4	0.2	40.7	6.6	0.0	6.6	68.9	0.2	0.7	0.7	1.4	0.7	0.0	2.3	118.4						
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R3	9.2	5.9	0.4	0.0	0.1	0.0	15.6	7.2	6.8	14.0	26.5	0.1	0.3	0.4	0.7	0.1	0.0	0.9	57.0						
R4	3.3	1.1	0.1	0.1	0.0	0.0	4.6	1.0	2.9	3.9	7.8	0.1	0.0	0.1	0.1	0.1	0.0	0.2	16.6						
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
HR2	89.2	42.7	5.1	2.3	0.6	0.3	140.1	133.2	95.2	228.4	237.3	1.8	1.6	2.2	3.8	2.5	0.0	8.0	613.8						

様式-3 被害額(緊急水防災整備H27) 水系名: 由良川 河川名: 由良川 流量規模: 1/10 (百万円)

記号 ブロック	一般資産被審額						農作物被審額				公共土木施設等被審額	富貴等禁止損失	家庭における 応急対策費用				事業所における 応急対策費用	その他の関係被審者	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			家庭における 応急対策費用		清掃労働対価	代耕活動等						小計
			償却	在庫	償却	在庫							清掃労働対価	代耕活動等								
L1	28.0	0.0	5.8	0.8	0.1	0.1	34.8	42.9	34.1	76.9	59.0	1.6	0.0	0.0	0.0	1.3	0.0	2.9	173.6			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	25.7	8.8	1.5	1.4	0.1	0.0	37.5	4.9	0.0	4.9	63.5	0.6	0.3	0.3	0.7	1.2	0.0	2.5	108.3			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-9	2.1	0.1	0.1	0.0	0.0	0.0	2.2	7.8	1.7	9.5	3.8	0.1	0.0	0.0	0.1	0.0	0.0	0.2	15.7			
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	600.9	266.4	4.9	6.8	5.1	2.0	886.1	39.7	35.7	75.4	1,501.0	2.2	10.3	16.4	26.7	3.3	0.0	32.2	2,494.7			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	13.0	1.8	1.0	0.9	0.0	0.0	16.7	86.6	57.5	144.1	28.3	0.3	0.1	0.1	0.2	0.3	0.0	0.7	189.8			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	0.3	0.6	0.0	0.0	0.0	0.0	1.0	5.1	0.3	5.4	1.7	0.0	0.1	0.2	0.3	0.0	0.0	0.3	8.4			
R1-3	29.6	24.1	0.8	0.9	0.5	0.2	56.1	6.9	0.0	6.9	95.0	0.3	0.9	0.8	1.7	1.0	0.0	2.9	160.9			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	21.1	17.7	1.1	0.6	0.3	0.1	40.3	8.6	8.5	17.1	68.3	0.2	0.7	0.9	1.6	0.3	0.0	2.1	127.8			
R5	30.8	9.6	3.1	1.0	0.1	0.0	44.5	25.2	6.0	31.2	75.5	2.4	0.5	0.7	1.2	0.8	0.0	4.4	155.6			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	751.4	329.2	18.3	11.8	6.2	2.4	1,119.2	227.8	143.8	371.6	1,896.0	7.5	12.8	19.5	32.4	8.3	0.0	48.1	3,434.9			

様式-3 被害額(緊急水防災整備H27) 水系名: 由良川 河川名: 由良川 流量規模: 1/20 (百万円)

沿道 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				作業前における 応急対策費用	その他の関係被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農産物資産		小計	水稻	畑作物	小計			家屋における 応急対策費用								
			償却	在庫	償却	在庫							頂上労働対価	代修活動等	小計						
L1	52.9	1.3	9.5	1.8	0.2	0.1	65.9	52.2	41.8	94.0	111.6	3.1	0.2	0.3	0.5	3.0	0.0	6.5	278.1		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	51.3	17.2	2.5	2.1	0.1	0.1	73.3	5.5	0.0	5.5	124.1	1.3	0.7	0.7	1.3	2.2	0.0	4.8	207.7		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.6	0.0	6.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.7		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-9	11.4	1.8	0.3	0.1	0.1	0.0	13.6	9.1	1.7	10.8	23.0	0.2	0.1	0.1	0.1	0.1	0.0	0.4	47.9		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	21,619.5	10,769.6	9,863.8	2,963.8	9.8	4.2	44,929.6	20.7	4.9	25.6	76,110.8	2,397.0	441.9	654.1	1,095.9	1,576.7	0.0	5,069.7	126,135.7		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	3,123.7	939.0	256.7	107.8	9.7	3.8	4,440.6	88.5	48.8	137.3	7,522.4	74.5	38.2	64.0	102.3	45.1	0.0	221.8	12,322.1		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	41.9	4.8	2.6	2.3	0.1	0.1	51.9	97.6	66.1	163.6	87.8	0.7	0.2	0.3	0.5	0.8	0.0	1.9	305.2		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	6.5	11.9	0.0	0.0	0.4	0.2	19.0	5.9	1.3	7.1	32.2	0.0	0.5	0.8	1.3	0.0	0.0	1.3	59.6		
R1-3	53.8	42.3	1.1	1.4	1.0	0.4	100.0	7.4	0.0	7.4	169.5	0.5	1.5	1.4	2.9	1.7	0.0	5.1	281.9		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	71.0	41.6	2.4	0.1	0.5	0.2	115.8	10.2	11.2	21.3	196.2	0.4	1.7	2.2	3.9	0.8	0.0	5.1	338.5		
R5	67.0	24.9	8.6	3.0	0.2	0.1	103.7	26.2	6.7	32.9	175.7	6.6	1.0	1.5	2.5	2.1	0.0	11.3	323.6		
R6	722.8	613.2	187.7	62.0	6.6	2.7	1,594.9	50.3	0.7	51.0	2,701.8	53.7	23.6	34.9	58.5	52.7	0.0	164.9	4,512.5		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	25,821.8	12,466.6	10,335.0	2,844.3	28.8	11.8	51,508.4	380.0	183.1	563.1	87,255.2	2,537.8	509.6	760.2	1,269.8	1,685.1	0.0	5,492.7	144,819.4		

様式－３		被害額（緊急水防災整備H27）						水系名：由良川			河川名：由良川			流量規模：1/50			(百万円)			
地区 ブロック	一般資産被害額							農作物被害額			公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価							
			償却	在庫	償却	在庫							清掃活動等	小計						
L1	140.6	13.1	18.1	4.8	0.7	0.3	177.6	62.7	46.8	109.5	300.8	6.0	0.6	1.1	1.8	6.4	0.0	14.2	602.0	
L1-1	6.2	1.1	0.5	0.3	0.0	0.0	8.1	0.1	0.0	0.1	13.7	0.2	0.2	0.3	0.4	0.2	0.0	0.9	22.8	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	91.7	30.8	5.9	2.9	0.3	0.1	131.7	5.9	0.0	5.9	223.1	3.0	1.3	1.7	3.0	3.6	0.0	9.6	370.2	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	6.9	6.5	5.4	1.2	0.1	0.0	20.1	12.9	0.0	12.9	34.0	2.0	0.4	0.7	1.1	1.3	0.0	4.4	71.4	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	58.7	10.4	2.0	2.0	0.3	0.1	73.5	9.8	1.8	11.7	124.5	1.3	0.4	0.5	0.9	0.7	0.0	2.9	212.5	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	79,957.2	40,267.8	33,222.9	11,301.9	31.7	11.8	164,793.3	23.2	5.1	28.2	279,159.8	7,300.7	1,600.2	1,373.7	2,974.0	6,971.7	0.0	17,246.4	461,227.8	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	10,531.2	5,013.2	1,091.7	468.8	22.1	9.0	17,136.0	99.4	54.3	153.6	29,028.4	278.8	186.4	211.5	397.9	259.6	0.0	936.3	47,254.3	
L7	9,999.7	3,388.2	1,795.9	778.3	10.4	3.9	15,976.4	30.7	8.7	39.3	27,064.0	435.7	130.2	155.8	286.0	230.5	0.0	952.2	44,031.9	
R1	159.8	20.0	7.3	6.5	1.0	0.4	195.0	106.3	72.0	178.2	330.3	2.1	0.9	1.3	2.2	2.6	0.0	6.8	710.3	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	16.9	44.5	0.0	0.0	1.5	0.6	63.5	6.6	1.3	7.9	107.6	0.0	1.7	2.3	4.0	0.0	0.0	4.0	182.9	
R1-3	91.9	71.0	2.0	2.5	1.6	0.6	169.5	7.7	0.0	7.7	287.2	0.9	2.6	2.3	4.9	2.6	0.0	8.3	472.7	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	132.1	82.0	3.9	0.2	1.2	0.5	219.9	10.6	12.0	22.6	372.5	0.6	3.0	3.4	6.3	1.4	0.0	8.3	623.2	
R5	525.1	167.5	42.1	17.5	2.9	1.1	756.1	29.9	6.9	36.8	1,280.7	18.8	6.0	6.5	12.5	10.9	0.0	42.2	2,115.8	
R6	2,965.2	2,306.7	666.9	321.9	20.9	8.2	6,289.7	77.3	4.0	81.3	10,654.8	154.9	83.5	77.2	160.7	212.3	0.0	528.0	17,553.7	
R7	350.2	213.5	201.3	25.4	0.6	0.3	791.2	0.0	5.8	5.8	1,340.2	14.3	7.8	8.8	16.5	16.3	0.0	47.1	2,184.3	
R8	3,055.9	1,351.0	784.3	382.9	2.6	1.2	5,577.9	7.2	6.3	13.5	9,448.9	136.8	50.5	56.5	107.0	72.7	0.0	316.5	15,356.8	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	106,088.9	52,987.1	37,850.3	13,316.9	97.9	38.1	212,379.3	490.5	224.8	715.3	359,770.5	8,356.0	2,075.5	1,903.6	3,979.1	7,792.9	0.0	20,128.0	592,993.0	

表式－3			被害額（緊急水防災整備H27）						水系名：由良川				河川名：由良川				流量規模：1/100			(百万円)		
地区 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清障労働対価									
			償却	在庫	償却	在庫							清掃活動等	代替活動等	小計							
L1	505.3	120.8	47.7	13.4	3.4	1.3	691.9	68.0	47.4	115.5	1,172.1	15.7	5.6	9.4	15.0	17.9	0.0	48.6	2,028.1			
L1-1	31.7	5.6	3.0	1.3	0.0	0.0	41.6	2.4	0.0	2.4	70.4	1.2	0.8	1.5	2.3	1.3	0.0	4.8	119.2			
L1-2	21.4	11.1	0.4	0.0	0.1	0.0	33.0	0.0	0.0	0.0	55.9	0.1	0.5	0.8	1.3	0.4	0.0	1.8	90.7			
L1-3	230.7	88.7	17.7	5.8	0.8	0.3	344.0	6.3	0.0	6.3	582.8	6.8	3.2	4.4	7.6	7.5	0.0	21.9	954.9			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	563.3	133.4	140.6	25.4	2.2	0.8	865.7	21.7	1.3	23.0	1,466.5	32.4	4.5	4.0	8.5	26.7	0.0	67.5	2,422.7			
L1-6	804.9	502.4	164.7	120.0	5.4	2.0	1,599.4	19.9	0.9	20.8	2,709.4	47.9	18.3	16.6	34.9	67.1	0.0	149.8	4,479.4			
L1-7	101.1	88.2	35.5	10.0	0.8	0.3	236.0	17.8	0.1	17.9	399.7	9.7	3.0	4.1	7.1	9.9	0.0	26.8	680.3			
L1-8	208.9	94.1	15.6	12.3	1.4	0.6	333.0	9.6	0.5	10.0	564.1	5.6	3.7	4.8	8.5	9.7	0.0	23.8	930.9			
L1-9	158.5	35.4	7.5	10.8	0.8	0.3	213.4	10.1	1.9	12.0	361.4	3.6	1.3	1.4	2.7	2.8	0.0	9.1	595.9			
L1-10	1.8	2.1	1.3	0.3	0.0	0.0	5.5	0.0	0.5	0.5	9.4	0.4	0.1	0.1	0.2	0.3	0.0	0.9	16.3			
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-12	113.3	32.0	1.9	0.8	0.3	0.1	148.3	3.5	0.0	3.5	251.3	0.8	1.6	2.8	4.4	1.9	0.0	7.1	410.2			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	154,934.8	62,494.3	47,702.2	17,188.4	50.3	17.3	282,387.3	23.7	5.1	28.8	478,364.1	13,538.7	2,574.2	1,770.4	4,344.6	10,900.4	0.0	28,783.7	789,563.9			
L5	24,506.4	8,950.6	4,293.0	2,428.8	14.1	5.0	40,197.8	14.3	4.6	18.9	68,095.0	1,102.4	327.1	257.2	584.3	714.2	0.0	2,400.9	110,712.6			
L6	18,117.1	8,912.7	1,754.0	787.8	36.4	14.5	29,622.3	110.1	55.9	166.0	50,180.2	431.9	317.9	308.2	626.1	434.5	0.0	1,492.5	81,461.0			
L7	13,361.7	5,348.8	2,592.4	1,171.5	11.3	4.3	22,490.0	39.2	11.0	50.2	38,098.0	636.9	206.7	251.9	458.6	294.9	0.0	1,390.5	62,028.6			
R1	711.9	167.3	21.2	18.0	4.8	1.8	924.9	115.1	73.9	189.0	1,566.9	6.9	7.8	11.8	19.6	11.4	0.0	38.0	2,718.7			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	267.1	303.2	10.6	4.2	6.3	2.6	583.9	16.4	1.3	17.7	1,006.1	3.1	11.1	10.5	21.6	2.9	0.0	27.7	1,645.4			
R1-3	142.7	121.2	3.6	4.5	2.6	1.0	275.6	8.0	0.0	8.0	466.9	1.4	4.4	3.9	8.2	4.8	0.0	14.5	765.0			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	467.4	127.4	18.3	7.1	1.5	0.6	622.3	10.8	1.5	12.3	1,054.2	4.2	4.8	5.3	10.1	10.7	0.0	25.0	1,713.8			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	3,877.7	2,097.4	178.4	118.4	17.0	6.2	6,294.9	42.3	20.1	62.4	10,663.6	49.9	76.4	67.0	143.4	98.8	0.0	292.0	17,313.0			
R4	375.3	167.9	7.1	0.4	2.5	1.0	554.1	11.0	12.3	23.2	938.7	1.1	6.3	6.4	12.6	2.8	0.0	16.5	1,532.5			
R5	888.0	274.1	63.4	23.0	4.3	1.6	1,254.5	30.6	7.2	37.8	2,125.2	31.3	9.8	9.7	19.6	15.0	0.0	65.9	3,483.4			
R6	4,856.6	3,524.8	838.1	465.0	33.5	11.8	9,729.8	95.2	8.9	104.1	16,482.3	228.5	123.4	98.2	221.6	312.3	0.0	762.3	27,078.5			
R7	728.1	433.7	379.0	54.4	1.3	0.5	1,597.1	0.0	6.1	6.1	2,705.4	27.6	15.5	14.0	29.5	33.1	0.0	90.2	4,398.7			
R8	6,892.6	3,061.5	1,281.9	738.8	6.1	2.2	11,983.0	8.3	6.6	14.9	20,299.1	259.1	106.5	88.1	194.6	157.7	0.0	611.4	32,908.3			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	232,868.1	97,098.5	59,579.0	23,210.5	207.0	76.3	413,039.3	684.1	266.9	951.0	699,688.7	16,447.2	3,834.3	2,952.6	6,787.0	13,138.8	0.0	36,373.0	1,150,052.0			

[illegible]

様式－3			被害額（当面整備H32）										水系名：由良川				河川名：由良川				流量規模：1/3				（百万円）		
沿道 ブロック	一般資産被害額								農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の間 接被害	小計	合計	備考				
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価	代替活動等			小計												
			償却	在庫	償却	在庫																					
L1	5.8	0.0	0.7	0.1	0.0	0.0	6.7	14.3	12.0	26.3	11.3	0.4	0.0	0.0	0.0	0.2	0.0	0.6	44.8								
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.5	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.8								
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R1	1.1	0.4	0.0	0.0	0.0	0.0	1.5	31.6	24.3	55.9	2.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	60.0								
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.3	0.0	2.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.3								
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
合計	6.9	0.4	0.8	0.1	0.0	0.0	8.2	48.5	36.8	85.2	13.9	0.4	0.0	0.0	0.0	0.2	0.0	0.6	108.0								

様式－3			被害額（当面整備H32）										水系名：由良川				河川名：由良川				流量規模：1/5				（百万円）		
沿道 ブロック	一般資産被害額								農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の間接被害	小計	合計	備考				
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価				代替活動等	小計											
			償却	在庫	償却	在庫																					
L1	15.3	0.0	2.6	0.4	0.1	0.0	18.3	36.2	26.1	62.3	31.0	0.9	0.0	0.0	0.0	0.6	0.0	1.5	113.1								
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-2	13.4	5.6	0.9	0.6	0.1	0.0	20.6	4.5	0.0	4.5	34.8	0.4	0.2	0.2	0.4	0.5	0.0	1.3	61.2								
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
L5	0.4	0.1	0.0	0.0	0.0	0.0	0.5	1.2	0.8	2.0	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.2							
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L7	3.9	0.6	0.3	0.2	0.0	0.0	4.9	60.3	42.1	102.4	8.3	0.1	0.0	0.0	0.0	0.1	0.0	0.2	115.7								
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0								
R1-1	0.1	0.0	0.0	0.0	0.0	0.0	0.1	3.0	0.0	3.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.2							
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
HR2	33.0	6.3	3.7	1.1	0.1	0.1	44.2	105.2	69.0	174.2	74.9	1.4	0.2	0.3	0.5	1.2	0.0	3.0	296.4								

様式－3			被害額（当面整備H32）					水系名：由良川				河川名：由良川				流量規模：1/10				(百万円)			
沿道 ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価	代替活動等	小計										
			償却	在庫	償却	在庫																	
L1	29.5	0.0	5.9	0.8	0.1	0.1	36.4	43.9	35.7	79.6	61.6	1.6	0.0	0.0	0.0	1.4	0.0	3.0	180.5				
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	25.7	8.8	1.5	1.4	0.1	0.0	37.5	5.1	0.0	5.1	63.5	0.6	0.3	0.3	0.7	1.2	0.0	2.5	108.5				
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	1.0	0.3	0.0	0.0	0.0	0.0	1.3	3.0	1.1	4.1	2.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.5				
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1	11.9	1.1	1.2	0.8	0.0	0.0	15.1	91.2	59.8	150.9	25.5	0.3	0.0	0.0	0.1	0.2	0.0	0.6	192.0				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	0.3	0.6	0.0	0.0	0.0	0.0	1.0	5.2	0.3	5.5	1.7	0.0	0.1	0.2	0.3	0.0	0.0	0.3	8.5				
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	68.4	10.8	8.6	3.0	0.3	0.1	91.2	148.3	96.8	245.2	154.4	2.5	0.5	0.6	1.0	2.8	0.0	6.3	497.0				

様式－3		被害額（当面整備H32）					水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)											
沿道 ブロック	一般資産被害額															農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産			農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価			代替活動等	小計														
			償却	在庫		償却	在庫																							
L1	55.8	1.2	9.4	1.8	0.2	0.1	68.5	53.9	42.9	96.7	116.1	3.0	0.1	0.3	0.4	3.0	0.0	6.4	287.8											
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L1-3	52.6	17.5	2.6	2.1	0.1	0.1	74.9	5.6	0.0	5.6	126.9	1.3	0.7	0.7	1.4	2.3	0.0	5.0	212.4											
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L4	16,679.7	8,921.3	8,238.2	2,157.9	8.6	3.6	38,009.2	22.4	4.8	27.2	64,387.6	2,120.4	371.6	590.5	962.1	1,318.8	0.0	4,401.4	106,925.3											
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L6	2,885.3	812.9	238.2	101.7	8.8	3.4	4,050.4	83.2	41.3	124.5	6,961.4	72.1	34.0	58.1	92.1	42.4	0.0	206.6	11,242.9											
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R1	39.3	1.4	1.9	1.4	0.2	0.1	44.4	99.8	68.2	168.1	75.2	0.4	0.1	0.0	0.1	0.4	0.0	0.9	288.6											
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R1-2	7.3	12.5	0.0	0.0	0.4	0.2	20.4	6.0	1.3	7.3	34.6	0.0	0.6	0.9	1.5	0.0	0.0	1.5	63.8											
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R3	0.0	8,921.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R6	156.2	81.4	14.3	5.5	0.6	0.3	258.3	0.0	0.0	0.0	437.5	2.7	3.0	4.4	7.4	1.6	0.0	11.6	707.4											
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
合計	21,876.2	9,848.2	8,504.7	2,270.4	19.0	7.6	42,526.1	270.9	158.4	429.3	72,039.3	2,200.0	410.1	654.9	1,065.0	1,368.4	0.0	4,633.5	119,628.3											

様式－３		被害額（当面整備H32）					水系名：由良川			河川名：由良川			流量規模：1/50			(百万円)								
応急 ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等	小計											
			償却	在庫	償却	在庫																		
L1	159.6	8.8	18.5	5.3	0.8	0.3	193.3	63.7	47.0	110.7	327.4	6.0	0.4	0.7	1.1	7.8	0.0	14.8	646.2					
L1-1	6.2	1.1	0.5	0.3	0.0	0.0	8.1	0.1	0.0	0.1	13.7	0.2	0.2	0.3	0.4	0.2	0.0	0.9	22.8					
L1-2	2.3	0.5	0.1	0.0	0.0	0.0	2.8	0.0	0.0	0.0	4.7	0.0	0.1	0.1	0.2	0.1	0.0	0.3	7.7					
L1-3	100.1	32.8	6.9	3.1	0.3	0.1	143.3	6.0	0.0	6.0	242.7	3.4	1.4	2.0	3.5	3.9	0.0	10.8	402.8					
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-8	0.1	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L4	62,786.3	31,629.8	27,961.4	9,129.9	24.6	9.8	131,541.8	23.1	5.0	28.1	222,831.8	5,895.0	1,283.5	1,232.5	2,516.0	5,482.7	0.0	13,893.7	368,295.5					
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L6	10,069.4	4,705.7	1,081.0	463.5	19.9	7.8	16,347.3	91.2	41.9	133.1	27,692.3	277.4	175.7	198.6	374.3	256.2	0.0	908.0	45,080.6					
L7	9,999.7	3,388.2	1,795.9	778.3	10.4	3.9	15,976.4	30.7	8.7	39.3	27,064.0	435.7	130.2	155.8	286.0	230.5	0.0	952.2	44,032.0					
R1	146.0	3.8	6.1	4.8	1.1	0.5	162.2	108.0	72.4	180.4	274.7	1.6	0.2	0.2	0.3	1.4	0.0	3.3	620.6					
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-2	21.0	57.9	0.0	0.0	1.8	0.7	81.5	6.6	1.3	7.9	138.0	0.0	2.0	2.6	4.6	0.0	0.0	4.6	232.0					
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R5	653.0	212.8	58.2	22.4	3.3	1.3	951.0	41.8	9.2	51.0	1,610.9	30.3	7.6	8.1	15.7	13.7	0.0	59.7	2,672.6					
R6	2,962.7	2,301.8	665.6	321.2	20.8	8.2	6,280.3	75.4	4.0	79.4	10,638.9	154.5	83.4	77.1	160.5	211.7	0.0	526.7	17,525.2					
R7	350.2	213.5	201.3	25.4	0.6	0.3	791.2	0.0	5.8	5.8	1,340.2	14.3	7.8	8.8	16.5	16.3	0.0	47.1	2,184.3					
R8	3,055.9	1,351.0	784.3	382.9	2.6	1.2	5,577.9	7.2	6.3	13.5	9,448.9	136.8	50.5	56.5	107.0	72.7	0.0	316.5	15,356.8					
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1	0.0	1.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
合計	90,312.2	43,907.5	32,579.9	11,137.0	86.2	34.0	178,056.8	454.9	201.5	656.5	301,628.3	6,955.1	1,742.9	1,743.3	3,486.1	6,297.4	0.0	16,738.6	497,080.3					

表式－３		被害額（当面整備H32）										水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)		
応急 ブロック	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の関係 被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価	代替活動等	小計													
			償却	在庫	償却	在庫																				
L1	521.8	107.8	34.9	11.3	3.6	1.3	680.7	68.9	47.4	116.3	1,153.2	12.7	5.0	8.7	13.8	17.8	0.0	44.3	1,994.5							
L1-1	21.1	3.7	2.0	0.9	0.0	0.0	27.7	2.4	0.0	2.4	47.0	0.8	0.5	1.0	1.5	0.9	0.0	3.2	80.2							
L1-2	23.3	11.5	0.4	0.0	0.1	0.0	35.4	0.0	0.0	0.0	59.9	0.1	0.5	0.9	1.4	0.4	0.0	2.0	97.2							
L1-3	248.2	98.8	20.1	5.9	0.9	0.4	374.2	6.2	0.0	6.2	633.9	7.2	3.7	4.7	8.4	8.1	0.0	23.7	1,038.0							
L1-4	147.8	76.7	3.9	2.4	1.3	0.5	232.5	2.9	1.9	4.8	393.9	1.6	2.7	2.9	5.7	2.7	0.0	10.0	641.3							
L1-5	563.3	133.4	140.6	25.4	2.2	0.8	865.7	21.8	1.2	23.1	1,466.5	32.4	4.5	4.0	8.5	26.7	0.0	67.5	2,422.8							
L1-6	903.2	582.1	180.2	133.1	6.2	2.3	1,807.0	21.0	1.0	22.0	3,061.1	52.9	20.7	18.6	39.3	72.3	0.0	164.4	5,054.6							
L1-7	181.7	156.3	56.0	18.5	1.3	0.6	414.4	18.6	0.1	18.7	701.9	14.9	5.7	6.0	11.7	18.2	0.0	44.7	1,179.7							
L1-8	226.8	102.7	16.3	12.6	1.7	0.7	360.7	9.6	0.5	10.0	611.0	5.7	3.9	5.0	8.9	10.1	0.0	24.8	1,006.5							
L1-9	179.9	40.1	7.7	11.2	0.9	0.3	240.1	18.0	3.1	21.1	406.7	3.7	1.5	1.7	3.2	3.1	0.0	10.0	677.8							
L1-10	1.8	2.5	1.5	0.4	0.0	0.0	6.2	0.0	0.6	0.6	10.4	0.4	0.1	0.1	0.2	0.4	0.0	1.0	18.2							
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L4	138,711.0	59,073.0	44,884.9	16,222.6	46.5	16.1	258,953.9	23.3	5.1	28.4	438,667.9	12,128.1	2,390.1	1,652.9	4,043.1	10,497.0	0.0	26,668.1	724,318.2							
L5	18,014.3	6,577.0	3,382.2	1,735.3	10.6	4.0	29,723.4	17.8	5.6	23.4	50,351.5	811.7	242.6	217.5	460.1	582.2	0.0	1,854.0	81,952.2							
L6	15,406.7	7,444.4	1,586.3	755.0	28.2	10.7	25,231.2	100.7	47.7	148.3	42,741.7	418.8	265.9	254.2	520.2	418.3	0.0	1,357.3	69,478.5							
L7	13,347.8	5,341.5	2,590.3	1,170.7	11.3	4.3	22,466.0	39.2	11.1	50.3	38,057.4	636.5	206.6	251.6	458.2	294.5	0.0	1,389.3	61,962.9							
R1	554.6	78.0	17.1	14.2	3.9	1.5	669.2	117.0	74.2	191.2	1,133.6	5.6	4.8	8.7	13.5	8.1	0.0	27.1	2,021.1							
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R1-2	277.3	307.2	10.9	4.3	6.3	2.6	608.5	16.4	1.3	17.7	1,030.8	3.2	11.4	11.0	22.4	3.0	0.0	28.6	1,685.7							
R1-3	154.6	132.9	3.7	4.9	3.0	1.1	300.1	9.4	0.0	9.4	508.4	1.5	4.7	4.0	8.7	5.2	0.0	15.4	833.3							
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R1-5	504.3	136.6	21.1	8.3	1.6	0.7	672.6	10.8	1.5	12.3	1,139.4	5.0	5.2	6.0	11.2	12.4	0.0	28.6	1,853.0							
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
R4	1,148.5	389.3	14.7	1.1	6.1	2.3	1,561.9	14.9	7.7	22.6	2,645.9	2.5	14.1	12.7	26.9	6.4	0.0	35.7	4,256.1							
R5	1,061.4	346.0	80.0	29.4	5.1	1.9	1,523.8	42.2	9.2	51.4	2,581.2	46.4	12.2	11.6	23.8	20.0	0.0	90.2	4,246.6							
R6	4,798.4	3,485.0	831.1	458.6	33.0	11.7	9,617.8	95.3	8.8	104.1	16,292.6	224.5	122.2	97.8	220.1	307.5	0.0	752.1	25,766.6							
R7	728.1	433.7	379.0	54.4	1.3	0.5	1,597.1	0.0	6.0	6.0	2,705.4	27.6	15.5	14.0	29.5	33.1	0.0	90.4	4,398.7							
R8	6,892.6	3,061.5	1,281.9	738.8	6.1	2.2	11,983.0	8.3	6.6	14.9	20,299.1	259.1	106.5	88.1	194.6	157.7	0.0	611.2	32,908.3							
HR2	32.2	13.8	13.9	2.9	0.1	0.0	63.0	3.3	0.0	3.3	106.6	1.7	0.7	1.2	1.9	1.6	0.0	5.2	178.1							
合計	204,650.5	88,135.5	55,560.6	21,422.0	181.0	66.4	370,015.9	667.7	240.7	908.4	626,806.8	14,704.7	3,451.4	2,685.1	6,136.5	12,507.6	0.0	33,348.8	1,031,079.9							

様式-3			被害額（緊急対策整備H34）						水系名：由良川				河川名：由良川		流量規模：1/1				(百万円)					
近道 ブロック	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対 償	代替活動等	小計											
			償却	在庫	償却	在庫																		
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	合計			
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

様式-3		被害額（緊急対策整備H34）						水系名：由良川				河川名：由良川				流量規模：1/2				(百万円)		
近道 ブロック	家屋	家庭用品	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対 償	代替活動等			小計							
			償却	在庫	償却	在庫																
L1	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.7	4.5	2.7	7.2	1.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9.1	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.0	9.6	11.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	11.6	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	0.7	0.0	0.0	0.0	0.0	0.0	0.7	6.5	12.3	18.8	1.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.7	

様式-3 被害額(緊急対策整備H34) 水系名: 由良川 河川名: 由良川 流量規模: 1/3 (百万円)

[illegible]

様式-3 被害額（緊急対策整備H34） 水系名：由良川 河川名：由良川 流量規模：1/5 （百万円）

記号 ブロック	一般資産被害額							農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	家屋における 応急対策費用										
			償却	在庫	償却	在庫					清掃労働対 価			代替活動等	小計						
L1	15.3	0.0	2.6	0.4	0.1	0.0	18.3	36.5	26.5	63.0	31.0	0.9	0.0	0.0	0.0	0.6	0.0	1.5	113.9		
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L7	3.9	0.6	0.3	0.2	0.0	0.0	4.9	60.3	42.3	102.6	8.3	0.1	0.0	0.0	0.0	0.1	0.0	0.2	115.9		
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	19.2	0.6	2.8	0.5	0.1	0.0	23.2	96.8	68.8	165.6	39.3	1.0	0.0	0.0	0.0	0.7	0.0	1.7	229.8		

(百万円)

形態 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計					
			償却	在庫	償却	在庫														
L1	30.6	0.0	5.9	0.8	0.1	0.1	37.5	44.2	36.2	80.4	63.6	1.6	0.0	0.0	0.0	1.4	0.0	3.0	184.5	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	11.9	1.1	1.2	0.8	0.0	0.0	15.1	91.5	60.0	151.4	25.5	0.3	0.0	0.0	0.1	0.2	0.0	0.6	192.5	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	42.6	1.1	7.1	1.6	0.2	0.1	52.6	135.7	96.2	231.9	89.1	1.9	0.0	0.0	0.1	1.6	0.0	3.5	377.0	

(百万円)

[illegible]

様式－３		被害額（緊急対策整備H34）										水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)	
応急 ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価	代替活動等	小計												
			償却	在庫	償却	在庫																			
L1	175.7	11.5	18.8	5.4	0.9	0.4	212.6	64.2	47.0	111.2	360.2	6.2	0.4	0.8	1.2	7.9	0.0	15.3	699.4						
L1-1	6.2	1.1	0.5	0.3	0.0	0.0	8.1	0.1	0.0	0.1	13.7	0.2	0.2	0.3	0.4	0.2	0.0	0.9	22.8						
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-8	0.5	0.0	0.0	0.0	0.0	0.0	0.5	0.2	0.0	0.2	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-10	0.0	0.0	0.1	0.0	0.0	0.0	0.1	0.0	0.1	0.1	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.5					
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L4	66,186.2	33,396.1	29,005.7	9,551.1	26.1	10.2	138,175.4	23.1	5.0	28.1	234,069.1	6,172.2	1,350.0	1,263.1	2,613.1	5,773.0	0.0	14,558.3	386,830.8						
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L6	10,569.0	4,982.0	1,079.4	465.3	21.1	8.3	17,125.0	122.9	59.1	182.0	29,009.8	277.3	187.6	213.7	401.2	257.9	0.0	936.4	47,253.3						
L7	9,987.9	3,369.5	1,793.5	777.1	10.4	3.9	15,942.3	30.7	8.7	39.4	27,006.2	435.3	129.6	155.3	285.0	229.8	0.0	950.0	43,937.9						
R1	155.5	3.9	6.2	4.9	1.1	0.5	172.2	108.2	72.8	180.9	291.7	1.6	0.2	0.2	0.4	1.5	0.0	3.5	648.3						
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R5	466.8	169.9	49.1	20.2	1.7	0.7	708.4	33.1	7.6	40.7	1,200.1	29.0	6.0	6.5	12.6	12.7	0.0	54.3	2,003.5						
R6	2,835.6	2,221.9	649.3	310.6	20.1	8.0	6,045.4	72.5	3.9	76.3	10,240.9	149.6	80.8	75.4	156.2	204.5	0.0	510.3	16,872.9						
R7	350.2	213.5	201.3	25.4	0.6	0.3	791.2	0.0	5.8	5.8	1,340.2	14.3	7.8	8.8	16.5	16.3	0.0	47.1	2,184.3						
R8	3,055.9	1,351.0	784.3	382.9	2.6	1.2	5,577.9	7.2	6.3	13.5	9,448.9	136.8	50.5	56.5	107.0	72.7	0.0	316.5	15,356.8						
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1	0.0	1.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
合計	93,789.4	45,720.3	33,588.2	11,543.2	84.6	33.3	184,759.0	463.3	216.1	679.4	312,981.8	7,222.6	1,813.1	1,780.5	3,593.6	6,576.6	0.0	17,392.7	515,813.0						

様式－３		被害額（緊急対策整備H34）						水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)			
応急 ブロック	一般資産被害額								農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価				代替活動等		小計						
			償却	在庫	償却	在庫																	
L1	618.3	155.9	40.5	12.9	4.1	1.5	833.2	69.8	47.4	117.2	1,411.5	14.3	6.3	10.9	17.1	20.9	0.0	52.3	2,414.2				
L1-1	21.8	3.9	2.0	0.9	0.0	0.0	28.6	2.4	0.0	2.4	48.4	0.8	0.5	1.0	1.6	0.9	0.0	3.3	82.6				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	335.8	135.8	27.5	9.5	1.2	0.5	510.2	8.3	0.0	8.3	864.3	9.1	4.9	5.7	10.5	12.1	0.0	31.7	1,414.6				
L1-4	168.8	78.2	5.5	2.5	1.3	0.5	256.9	3.0	1.9	4.9	435.1	2.1	2.8	3.1	5.9	3.3	0.0	11.3	708.2				
L1-5	598.9	144.6	145.9	27.3	2.3	0.9	919.7	22.0	1.2	23.3	1,558.0	33.5	5.1	4.4	9.5	28.1	0.0	71.1	2,572.1				
L1-6	981.3	619.0	190.1	142.5	7.0	2.6	1,942.5	21.0	1.0	22.0	3,290.5	56.6	22.0	19.5	41.5	76.5	0.0	174.6	5,429.5				
L1-7	192.1	163.7	57.9	19.6	1.4	0.6	435.2	18.7	0.1	18.8	737.3	15.5	6.0	6.1	12.1	18.5	0.0	46.2	1,237.5				
L1-8	275.5	124.3	18.0	13.9	2.0	0.8	434.4	9.6	0.5	10.1	735.9	6.2	4.6	5.5	10.1	12.0	0.0	28.3	1,208.6				
L1-9	217.8	55.6	10.1	16.0	1.1	0.4	301.0	18.2	3.1	21.3	509.9	5.1	2.1	2.1	4.2	4.2	0.0	13.5	845.6				
L1-10	56.5	49.2	14.0	8.9	0.2	0.1	128.9	23.6	1.1	24.7	218.3	3.8	1.9	2.1	4.0	3.6	0.0	11.4	383.2				
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	143,234.9	59,861.9	45,643.3	16,492.0	47.0	16.3	265,295.4	23.6	5.1	28.7	449,410.4	12,543.1	2,436.1	1,668.8	4,104.9	10,610.2	0.0	27,258.3	741,992.8				
L5	18,014.3	6,577.0	3,382.2	1,735.3	10.6	4.0	29,723.4	17.8	5.6	23.4	50,351.5	811.7	242.6	217.5	460.1	582.2	0.0	1,854.0	81,952.2				
L6	16,336.9	8,019.0	1,603.5	782.0	30.8	11.8	26,764.0	127.8	59.8	187.6	45,338.3	422.8	286.3	279.0	565.3	421.9	0.0	1,410.0	73,699.9				
L7	13,347.8	5,341.5	2,590.3	1,170.7	11.3	4.3	22,466.0	39.2	11.0	50.2	38,057.4	636.5	206.6	251.6	458.2	294.5	0.0	1,389.3	61,962.9				
R1	647.7	104.8	18.2	15.6	4.8	1.8	792.8	117.8	74.2	192.0	1,343.0	6.3	5.7	10.3	16.0	8.7	0.0	30.9	2,358.7				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	375.1	422.7	11.3	4.5	9.4	3.6	826.5	21.6	1.6	23.2	1,400.1	3.3	14.9	13.6	28.5	3.2	0.0	34.9	2,284.7				
R1-3	154.6	133.5	3.8	4.9	3.0	1.1	300.8	9.4	0.0	9.4	509.5	1.6	4.7	4.0	8.7	5.3	0.0	15.5	835.2				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	650.8	186.3	28.0	11.2	2.2	0.9	879.4	10.8	1.5	12.3	1,489.7	7.3	7.2	8.3	15.5	17.6	0.0	40.4	2,421.8				
R1-6	265.9	40.4	1.1	0.9	1.1	0.4	309.9	11.5	4.5	16.0	524.9	0.5	1.6	2.3	3.9	1.2	0.0	5.5	856.3				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	1,406.1	769.3	79.7	51.7	5.9	2.4	2,315.1	25.5	15.6	41.1	3,921.7	20.7	28.8	30.7	59.5	44.0	0.0	124.2	6,402.1				
R4	1,021.8	351.7	13.5	1.0	5.5	2.1	1,395.5	14.8	7.6	22.4	2,363.9	2.2	12.7	11.4	24.1	5.8	0.0	32.0	3,813.9				
R5	847.9	279.5	64.8	25.2	4.0	1.5	1,222.9	42.0	9.2	51.1	2,071.5	35.6	9.9	10.0	19.9	17.0	0.0	72.4	3,418.0				
R6	4,631.0	3,386.9	822.5	450.1	32.2	11.5	9,334.2	95.2	8.5	103.8	15,812.2	219.8	118.5	95.8	214.3	301.0	0.0	735.1	25,985.3				
R7	728.1	433.7	379.0	54.4	1.3	0.5	1,597.1	0.0	6.1	6.1	2,205.4	27.6	15.5	14.0	29.5	33.1	0.0	90.2	4,398.7				
R8	6,892.6	3,061.5	1,281.9	738.8	6.1	2.2	11,983.0	8.3	6.6	14.9	20,299.1	259.1	106.5	88.1	194.6	157.7	0.0	611.4	32,908.3				
HR2	32.2	13.8	13.9	2.9	0.1	0.0	63.0	3.3	0.0	3.3	106.6	1.7	0.7	1.2	1.9	1.6	0.0	5.2	178.1				
合計	212,054.4	90,513.6	56,448.3	21,775.0	195.8	72.2	381,059.3	765.0	273.2	1,038.2	645,514.4	15,146.7	3,554.3	2,766.9	6,321.2	12,685.0	0.0	34,152.9	1,061,764.8				

[illegible]

様式-3 被害額（事業実施後H56） 水系名：由良川 河川名：由良川 流量規模：1/3 （百万円）

[illegible]

様式-3 被害額（事業実施後H56） 水系名：由良川 河川名：由良川 流量規模：1/5 （百万円）

[illegible]

様式-3 被害額（事業実施後H56） 水系名：由良川 河川名：由良川 流量規模：1/10 （百万円）

記号 ブロック	一般資産被審額							農作物被審額				公共土木施設等被審額	富貴停止損失	家庭における応急対策費用			事業所における応急対策費用	その他の関係被審者	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	家庭における応急対策費用										
			償却	在庫	償却	在庫					清掃労働対価			代給活動等	小計						
L1	29.5	0.0	5.9	0.8	0.6	0.1	0.1	36.4	44.1	36.0	80.0	61.6	1.6	0.0	0.0	0.0	1.4	0.0	3.0	181.0	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	11.9	1.1	1.2	0.8	0.0	0.0	0.0	15.1	91.0	59.9	150.9	25.5	0.3	0.0	0.0	0.1	0.2	0.0	0.6	192.0	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
RH2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	41.4	1.1	7.1	1.6	0.2	0.1	51.4	135.0	95.9	230.9	87.1	1.9	0.0	0.0	0.1	1.6	0.0	3.5	373.0		

様式-3 被害額(事業実施後H56) 水系名: 由良川 河川名: 由良川 流量規模: 1/20 (百万円)

[illegible]

様式-3 被害額(事業実施後H56) 水系名: 由良川 河川名: 由良川 流量規模: 1/50 (百万円)

記号 ブロック	一般資産被審額							農作物被審額				公共土木施設等被審額	富貴停止損失	家園における応急対策費用				事業所における応急対策費用	その他の関係被審者	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	家園における応急対策費用											
			償却	在庫	償却	在庫					清掃労働対価			代経活動等	小計							
L1	174.3	5.6	18.8	5.4	0.9	0.4	205.3	64.2	47.0	111.2	347.8	6.2	0.2	0.4	0.6	7.9	0.0	14.7	679.0			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.5	0.0	0.0	0.0	0.0	0.0	0.5	0.2	0.0	0.2	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.5		
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-10	0.0	0.0	0.1	0.0	0.0	0.0	0.1	0.0	0.1	0.1	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.5			
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	155.4	3.9	6.2	4.9	1.1	0.5	172.1	108.3	72.7	181.0	291.5	1.6	0.2	0.2	0.4	1.5	0.0	3.5	648.0			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	851.2	294.2	191.5	74.4	0.8	0.3	1,412.4	2.6	1.6	4.2	2,392.6	46.9	13.0	23.0	36.0	15.8	0.0	98.6	3,907.8			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	1,181.4	303.8	216.6	84.7	2.8	1.2	1,790.4	175.3	121.3	296.6	3,032.9	54.7	13.4	23.6	37.0	25.2	0.0	116.9	5,236.8			

様式-3 被害額（事業実施後H56） 水系名：由良川 河川名：由良川 流量規模：1/100 （百万円）

地区 ブロック	一般資産被害額										農作物被害額				営業停止損失 公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の関係 被害者	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃安衛対策 費用	代償活動等 費用	小計												
			償却	在庫	償却	在庫																			
L1	606.1	139.6	40.3	12.9	4.0	1.5	804.4	70.0	47.4	117.4	1,362.6	14.3	5.9	10.4	16.3	20.8	0.0	51.4	2,335.8						
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-3	335.8	135.8	27.5	9.5	1.2	0.5	510.2	8.3	0.0	8.3	864.3	9.1	4.9	5.7	10.5	12.1	0.0	31.7	1,414.6						
L1-4	168.8	78.2	5.5	2.5	1.3	0.5	256.9	3.0	1.9	4.9	435.1	2.1	2.8	3.1	5.9	3.3	0.0	11.3	708.2						
L1-5	598.9	144.6	145.9	27.3	2.3	0.9	919.7	22.0	1.2	23.3	1,558.0	33.5	5.1	4.4	9.5	28.1	0.0	71.1	2,572.2						
L1-6	971.3	619.0	189.9	141.9	7.0	2.6	1,931.6	21.0	1.0	22.0	3,272.1	55.8	22.0	19.5	41.5	76.4	0.0	173.8	5,399.3						
L1-7	191.6	163.3	57.6	19.5	1.4	0.6	434.0	18.7	0.1	18.8	735.2	15.5	6.0	6.1	12.1	18.5	0.0	46.1	1,234.1						
L1-8	275.5	124.3	18.0	13.9	2.0	0.8	434.4	9.6	0.5	10.1	735.9	6.2	4.6	5.5	10.1	12.0	0.0	28.3	1,208.6						
L1-9	217.8	55.6	10.1	16.0	1.1	0.4	301.0	18.1	3.1	21.2	509.9	5.1	2.1	2.1	4.2	4.2	0.0	13.5	845.6						
L1-10	56.5	49.2	14.0	8.9	0.2	0.1	128.9	23.6	1.1	24.7	218.3	3.8	1.9	2.1	4.0	3.6	0.0	11.4	383.2						
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L4	112,418.1	52,148.1	40,786.9	14,475.3	39.7	14.1	219,882.2	22.5	5.0	27.5	372,480.4	9,955.2	2,089.3	1,543.0	3,612.3	9,425.5	0.0	22,993.1	615,383.2						
L5	18,014.3	6,577.0	3,382.2	1,735.3	36.6	4.0	29,723.4	17.8	5.6	23.4	50,351.5	811.7	242.6	217.5	460.1	582.2	0.0	1,854.0	81,952.2						
L6	6,261.1	2,296.7	502.0	216.3	17.0	7.3	9,300.4	127.4	62.2	189.6	15,754.9	122.0	82.9	114.0	196.9	93.5	0.0	412.4	25,657.3						
L7	9,174.8	3,502.4	1,548.3	683.4	6.8	2.6	14,918.2	38.8	11.0	49.8	25,271.5	440.6	143.6	184.4	328.0	186.1	0.0	954.7	41,194.3						
R1	647.7	104.8	18.2	15.6	4.8	1.8	792.8	118.0	74.1	192.1	1,343.0	6.3	5.7	10.3	16.0	8.7	0.0	30.9	2,358.8						
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-2	375.1	422.7	11.3	4.5	9.4	3.6	826.5	21.6	1.6	23.2	1,400.1	3.3	14.9	13.6	28.5	3.2	0.0	34.9	2,284.7						
R1-3	154.6	133.5	3.8	4.9	3.0	1.1	300.8	9.4	0.0	9.4	509.5	1.6	4.7	4.0	8.7	5.3	0.0	15.5	835.2						
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-5	646.4	183.8	27.9	11.2	2.2	0.9	872.3	10.8	1.5	12.3	1,477.7	7.3	7.1	8.2	15.4	17.6	0.0	40.2	2,402.7						
R1-6	265.9	40.4	1.1	0.9	1.1	0.4	309.9	11.5	4.5	16.0	524.9	0.5	1.6	2.3	3.9	1.2	0.0	5.5	856.3						
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R3	1,311.0	738.7	77.1	50.1	5.6	2.3	2,184.7	25.3	15.6	40.9	3,700.9	20.2	27.5	29.8	57.3	42.8	0.0	120.2	6,046.8						
R4	1,088.0	378.3	14.5	1.0	5.9	2.3	1,489.9	14.9	7.6	22.5	2,524.0	2.4	13.6	12.5	26.1	6.2	0.0	34.6	4,071.0						
R5	686.4	244.8	70.1	28.4	2.9	1.1	1,033.6	37.1	7.9	45.0	1,750.8	43.8	8.7	9.0	17.6	17.4	0.0	78.8	2,908.1						
R6	2,629.3	1,964.7	617.8	269.9	17.3	7.3	5,506.4	98.9	7.2	106.2	9,327.8	136.0	72.2	74.4	148.5	176.9	0.0	459.4	15,399.7						
R7	367.2	228.2	214.9	27.1	0.7	0.3	838.3	0.0	5.8	5.8	1,420.2	14.9	8.2	9.1	17.2	17.1	0.0	49.3	2,313.6						
R8	4,811.1	2,125.1	1,051.5	555.0	4.1	1.7	8,548.5	7.9	6.7	14.6	14,481.2	193.8	76.4	74.3	150.6	111.8	0.0	456.3	23,500.6						
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
合計	162,273.1	72,598.7	48,836.2	18,331.2	151.5	58.3	302,249.0	756.1	272.6	1,028.8	512,009.8	11,904.7	2,834.2	2,364.9	5,199.1	10,874.6	0.0	27,978.4	843,266.0						

様式-3			被害額（事業実施前H15） 資産+10%				水系名：由良川				河川名：由良川				流量規模：1/1				(百万円)	
近郊 ブロック	一般資産被害額		農作物被害額								公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対 価	代替活動等	小計					
			償却	在庫	償却	在庫														
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

様式-3		被害額（事業実施前H15） 資産+10%					水系名：由良川				河川名：由良川			流量規模：1/2				(百万円)		
近郊 ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対 価	代替活動等	小計					
			償却	在庫	償却	在庫														
L1	2.0	0.0	0.0	0.0	0.0	0.0	2.0	6.2	4.0	10.2	3.4	0.1	0.0	0.0	0.0	0.0	0.0	0.1	15.7	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	1.2	0.2	0.0	0.0	0.0	0.0	1.4	0.0	0.8	0.8	2.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.5	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.3	0.0	0.0	0.0	0.0	0.0	0.3	3.0	11.4	14.5	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	15.4	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	3.4	0.2	0.0	0.0	0.0	0.0	3.7	9.4	16.8	26.2	6.3	0.1	0.0	0.0	0.0	0.0	0.0	0.1	36.2	

様式-3			被害額（事業実施前H15） 資産+10%				水系名：由良川				河川名：由良川				流量規模：1/3				(百万円)			
近郊 ブロック	家屋 家庭用品		一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稻	畑作物	小計	家屋における 応急対策費用											
	償却	在庫	償却	在庫	清掃労働対 価	代替活動等					小計											
L1	6.7	0.1	0.8	0.1	0.0	0.0	7.7	16.0	14.4	30.4	13.1	0.4	0.0	0.0	0.0	0.2	0.0	0.6	51.8			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	2.5	0.2	0.7	0.3	0.0	0.0	3.7	1.6	0.0	1.6	6.2	0.3	0.0	0.1	0.1	0.2	0.0	0.5	12.0			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.5	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.7			
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1			
L1-11	0.8	1.5	1.8	0.4	0.0	0.0	4.6	0.7	3.0	3.7	7.8	0.2	0.1	0.1	0.2	0.3	0.0	0.6	16.8			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	11.3	1.1	0.0	0.0	0.0	0.0	12.3	1.8	11.0	12.7	20.9	0.0	0.1	0.2	0.3	0.0	0.0	0.3	46.2			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	1.2	0.4	0.0	0.0	0.0	0.0	1.7	38.3	28.0	67.2	2.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	71.8			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.8	0.0	2.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.8			
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.4	0.0	0.0	0.0	0.0	0.0	0.4	0.0	0.0	0.0	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.2			
R1-6	2.0	0.0	0.0	0.0	0.0	0.0	2.0	0.5	1.0	1.5	3.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.9			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6			
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	24.8	3.3	3.4	0.9	0.1	0.0	32.5	63.1	58.5	121.6	55.1	0.8	0.2	0.4	0.6	0.7	0.0	2.1	211.3			

様式-3		被害額（事業実施前H15） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/5				(百万円)	
近郊 ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考	
			事業所資産		農漁家資産		小計	水稻	畑作物	小計			家屋における 応急対策費用								
			償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計						
L1	18.3	0.9	3.0	0.4	0.1	0.0	22.8	38.7	27.6	66.3	38.6	1.0	0.0	0.0	0.1	0.8	0.0	1.8	129.4		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	14.8	6.2	0.9	0.7	0.1	0.0	22.6	4.7	0.0	4.7	38.3	0.4	0.2	0.2	0.4	0.5	0.0	1.3	66.9		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.8	0.0	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.8		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2		
L1-6	11.0	1.8	2.6	0.9	0.1	0.0	16.4	5.9	0.4	6.4	27.9	0.7	0.1	0.2	0.3	0.6	0.0	1.6	52.2		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.0	0.0	1.0	1.0	0.0	0.0	2.0	0.9	0.3	1.2	3.4	0.4	0.0	0.0	0.0	0.4	0.0	0.9	7.4		
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.5	1.5	7.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.0		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	0.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4		
L1-11	7.1	3.5	3.8	1.1	0.0	0.0	15.5	3.1	3.8	6.9	26.3	0.4	0.1	0.2	0.3	0.8	0.0	1.5	50.2		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	2.6	0.1	0.4	0.0	0.0	0.0	3.1	13.4	0.0	13.4	5.3	0.2	0.0	0.0	0.0	0.1	0.0	0.3	22.1		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	44.1	19.1	0.3	0.5	0.0	0.0	64.0	20.4	25.6	46.0	108.4	0.1	0.6	0.9	1.5	0.4	0.0	2.0	220.4		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	5.0	0.9	0.3	0.2	0.0	0.0	6.4	65.5	43.6	109.1	10.9	0.1	0.1	0.1	0.1	0.1	0.0	0.3	126.7		
R1-1	0.2	0.0	0.0	0.0	0.0	0.0	0.2	1.7	0.0	1.7	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.2		
R1-2	1.0	0.2	0.0	0.0	0.0	0.0	1.2	5.6	0.0	5.6	2.1	0.0	0.0	0.1	0.1	0.0	0.0	0.1	9.0		
R1-3	23.0	19.7	0.7	0.8	0.4	0.2	44.7	7.2	0.0	7.2	75.8	0.2	0.7	0.7	1.4	0.7	0.0	2.3	130.1		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	1.6	0.0	0.2	0.1	0.0	0.0	1.8	0.3	0.2	0.5	3.1	0.0	0.0	0.0	0.0	0.1	0.0	0.1	5.6		
R1-6	4.5	0.0	0.0	0.0	0.0	0.0	4.5	4.2	2.1	6.3	7.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	18.4		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	12.9	8.3	0.5	0.0	0.1	0.1	21.8	8.3	7.8	16.0	37.0	0.1	0.3	0.5	0.8	0.1	0.0	1.0	75.9		
R5	7.3	2.3	0.6	0.3	0.0	0.0	10.5	13.1	3.8	16.9	17.8	0.6	0.1	0.1	0.2	0.2	0.0	1.0	46.1		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	153.2	63.1	14.3	6.0	0.8	0.4	237.7	199.5	117.1	316.6	402.7	4.1	2.2	3.0	5.1	4.8	0.0	14.0	971.0		

様式-3			被害額（事業実施前H15） 資産+10%					水系名：由良川				河川名：由良川				流量規模：1/10				(百万円)	
地区 ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考	
			事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計						
			償却	在庫	償却	在庫															
L1	38.7	2.2	6.9	1.0	0.2	0.1	49.0	46.9	37.2	84.1	82.9	1.7	0.1	0.1	0.2	1.7	0.0	3.6	219.5		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	27.5	9.6	1.7	1.5	0.1	0.0	40.3	5.5	0.0	5.5	68.3	0.6	0.3	0.3	0.7	1.2	0.0	2.4	116.5		
L1-4	2.2	0.4	0.0	0.0	0.0	0.0	2.7	1.0	0.7	1.7	4.5	0.0	0.1	0.1	0.1	0.0	0.0	0.2	9.0		
L1-5	11.5	1.0	3.7	0.4	0.0	0.0	16.7	10.9	0.5	11.4	28.2	0.9	0.0	0.1	0.1	0.4	0.0	1.4	57.7		
L1-6	52.2	23.1	13.9	6.9	0.3	0.1	96.5	10.4	0.5	10.9	163.5	3.3	1.0	1.6	2.5	3.4	0.0	9.2	280.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.4	0.0	1.9	2.2	0.0	0.0	4.6	2.0	0.3	2.3	7.8	0.7	0.0	0.0	0.0	0.8	0.0	1.4	16.2		
L1-9	6.5	0.9	0.1	0.0	0.0	0.0	7.6	9.0	1.9	10.9	12.9	0.1	0.0	0.1	0.1	0.0	0.0	0.2	31.6		
L1-10	3.2	0.4	0.2	0.1	0.0	0.0	3.9	3.1	0.4	3.5	6.6	0.1	0.0	0.1	0.1	0.1	0.0	0.2	14.2		
L1-11	53.5	11.0	15.6	6.9	0.1	0.1	87.3	13.1	12.2	25.4	147.9	3.8	0.4	0.5	1.0	6.6	0.0	11.4	271.9		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1		
L2	97.1	38.2	3.7	0.7	0.1	0.0	139.9	15.8	0.0	15.8	237.0	1.2	1.2	1.4	2.6	1.2	0.0	5.0	397.6		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	21.5	2.7	3.4	1.2	0.0	0.0	28.7	0.0	0.0	0.0	48.6	1.6	0.4	0.7	1.1	0.8	0.0	3.5	80.8		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	226.3	72.5	1.9	2.2	0.5	0.2	303.6	45.4	47.0	92.4	514.3	0.8	4.0	6.6	10.6	1.4	0.0	12.8	923.1		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	23.1	6.5	1.3	1.1	0.1	0.1	32.2	95.9	63.0	158.9	54.6	0.3	0.3	0.4	0.7	0.5	0.0	1.5	247.2		
R1-1	8.3	5.9	1.2	1.0	0.0	0.0	16.4	10.6	2.2	12.8	27.7	0.5	0.2	0.3	0.5	0.3	0.0	1.4	58.2		
R1-2	5.5	2.5	0.0	0.0	0.1	0.0	8.1	8.8	0.4	9.2	13.7	0.0	0.1	0.2	0.3	0.0	0.0	0.3	31.3		
R1-3	32.6	26.5	0.9	1.0	0.6	0.2	61.7	7.6	0.0	7.6	104.5	0.3	0.9	0.8	1.7	1.0	0.0	2.9	176.7		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	6.4	0.9	0.5	0.2	0.0	0.0	8.1	1.4	0.3	1.7	13.6	0.1	0.0	0.1	0.1	0.3	0.0	0.5	23.9		
R1-6	16.3	0.2	0.0	0.0	0.1	0.0	16.6	4.9	2.6	7.5	28.1	0.0	0.0	0.0	0.1	0.0	0.0	0.1	52.2		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	23.3	20.8	1.2	0.0	0.3	0.1	45.7	9.6	10.4	20.0	77.4	0.2	0.7	1.0	1.7	0.3	0.0	2.2	145.3		
R5	39.2	11.6	3.5	1.1	0.1	0.0	55.6	28.1	6.7	34.9	94.2	2.4	0.5	0.9	1.4	0.9	0.0	4.7	189.3		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	695.4	236.8	61.5	27.7	2.5	1.0	1,024.9	330.1	186.3	516.4	1,736.3	18.5	10.3	15.2	25.4	20.8	0.0	64.6	3,342.3		

様式-3		被害額（事業実施前H15） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)	
区域 ブロック	家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
L1	76.3	7.5	10.8	2.2	0.3	0.1	97.2	56.9	45.4	102.3	164.6	3.3	0.5	0.8	1.3	3.6	0.0	8.2	372.2		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	29.7	10.0	1.7	1.5	0.1	0.0	43.1	5.8	0.0	5.8	73.0	0.6	0.3	0.4	0.7	1.2	0.0	2.6	124.5		
L1-4	19.8	7.8	0.3	0.3	0.2	0.1	28.4	1.9	1.4	3.3	48.1	0.2	0.3	0.6	0.9	0.3	0.0	1.3	81.1		
L1-5	106.5	11.3	44.8	5.3	0.3	0.1	168.2	18.7	0.8	19.5	285.0	7.7	0.5	0.8	1.3	5.2	0.0	14.2	486.9		
L1-6	144.7	93.5	38.2	20.7	0.9	0.4	298.5	12.5	0.6	13.1	505.6	8.0	3.1	4.0	7.1	9.5	0.0	24.6	841.8		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	0.0	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.3		
L1-8	1.7	0.2	3.4	4.8	0.0	0.0	10.1	2.9	0.3	3.2	17.1	1.1	0.0	0.0	0.0	1.7	0.0	2.8	33.2		
L1-9	23.6	3.2	0.6	0.2	0.1	0.0	27.7	10.1	1.9	12.1	46.9	0.4	0.1	0.2	0.3	0.2	0.0	0.8	87.5		
L1-10	13.0	4.3	0.8	0.5	0.0	0.0	18.6	20.6	0.4	21.0	31.6	0.2	0.2	0.2	0.4	0.3	0.0	0.8	72.0		
L1-11	122.5	23.5	31.5	15.1	0.2	0.1	192.9	14.0	12.3	26.3	326.8	6.7	0.8	0.9	1.7	13.2	0.0	21.5	567.5		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1		
L2	153.6	63.6	6.7	3.2	0.3	0.1	227.4	16.0	0.0	16.0	385.3	2.6	2.1	2.5	4.6	1.6	0.0	8.8	637.6		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	24,128.1	12,044.0	11,026.1	2,990.9	11.0	4.7	50,204.7	23.0	5.3	28.3	85,046.7	2,420.4	449.1	659.4	1,108.5	1,602.7	0.0	5,131.6	140,411.3		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	2,769.4	686.9	251.9	104.4	4.8	1.8	3,819.1	95.2	59.9	155.0	8,469.6	69.3	28.3	49.1	77.4	39.8	0.0	186.4	10,630.1		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	98.9	31.5	3.9	2.7	0.8	0.3	138.1	106.8	72.3	179.0	233.9	1.1	1.2	1.8	3.0	1.9	0.0	6.1	557.2		
R1-1	15.6	11.6	2.6	2.1	0.0	0.0	31.8	12.7	2.7	15.4	53.9	1.1	0.4	0.5	0.9	0.7	0.0	2.7	103.8		
R1-2	20.8	19.4	0.1	0.1	0.5	0.2	41.1	10.5	1.4	11.9	69.7	0.0	0.7	0.9	1.6	0.1	0.0	1.7	124.4		
R1-3	59.2	46.5	1.3	1.6	1.1	0.4	110.0	8.1	0.0	8.1	186.4	0.5	1.5	1.4	2.9	1.7	0.0	5.1	309.6		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	12.6	2.8	0.9	0.5	0.0	0.0	17.0	3.7	0.3	4.0	28.7	0.2	0.1	0.1	0.2	0.7	0.0	1.1	50.8		
R1-6	33.0	1.1	0.0	0.0	0.1	0.0	34.3	5.6	3.0	8.6	58.2	0.0	0.0	0.1	0.1	0.0	0.0	0.1	101.2		
R2	1.5	0.3	0.0	0.0	0.0	0.0	1.8	0.0	0.0	0.0	3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.8		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	78.9	48.0	2.7	0.1	0.6	0.3	130.5	11.2	12.4	23.6	221.1	0.4	1.8	2.2	4.0	0.8	0.0	5.2	380.5		
R5	125.8	44.2	13.3	4.6	0.6	0.2	188.7	30.1	7.4	37.5	319.6	7.3	1.6	2.4	3.9	2.9	0.0	14.1	560.0		
R6	171.9	89.6	15.8	6.0	0.6	0.3	284.1	0.0	0.0	0.0	481.3	2.7	3.0	4.4	7.4	1.6	0.0	11.6	777.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	28,207.1	13,250.7	11,457.2	3,166.6	22.6	9.2	56,113.5	473.7	227.7	701.4	95,056.1	2,533.5	495.6	732.5	1,228.1	1,689.6	0.0	5,451.3	157,322.3		

様式-3			被害額（事業実施前H15） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)		
地区 ブロック	家屋	家庭用品	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用				事業所における応急対策費用	その他の間接被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等			小計								
			償却	在庫	償却	在庫																	
L1	284.6	75.8	21.6	5.9	1.7	0.7	390.4	67.4	50.6	118.0	661.3	6.6	2.7	4.1	6.7	8.0	0.0	21.4	1,191.0				
L1-1	6.9	1.2	0.6	0.3	0.0	0.0	8.9	0.0	0.0	0.0	15.1	0.2	0.2	0.3	0.4	0.2	0.0	0.9	24.9				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	86.3	29.6	5.6	2.9	0.3	0.1	124.8	6.4	0.0	6.4	211.3	2.5	1.1	1.4	2.5	3.2	0.0	8.3	350.8				
L1-4	54.9	24.8	1.3	0.8	0.5	0.2	82.5	2.4	1.7	4.1	139.8	0.6	0.8	1.2	2.0	0.8	0.0	3.4	229.8				
L1-5	233.2	50.4	80.5	12.9	0.9	0.4	378.2	20.1	1.0	21.2	640.6	13.0	1.6	2.0	3.6	11.0	0.0	27.6	1,067.6				
L1-6	395.8	229.3	98.3	61.7	2.7	1.1	788.9	14.1	0.7	14.8	1,336.4	22.0	7.5	8.1	15.6	28.9	0.0	66.5	2,206.7				
L1-7	8.5	7.5	6.7	1.4	0.1	0.0	24.2	14.3	0.0	14.3	40.9	2.4	0.4	0.8	1.3	1.5	0.0	5.2	84.6				
L1-8	37.4	10.5	6.5	8.2	0.2	0.1	62.9	4.6	0.3	4.9	106.6	2.4	0.5	0.8	1.3	3.9	0.0	7.6	182.1				
L1-9	77.7	15.5	3.3	3.6	0.4	0.2	100.7	10.9	2.0	12.9	170.5	1.6	0.5	0.6	1.1	1.0	0.0	3.7	287.9				
L1-10	26.0	14.7	3.6	2.1	0.1	0.0	46.5	22.4	0.4	22.8	78.8	0.9	0.5	0.7	1.2	0.9	0.0	3.0	151.2				
L1-11	417.6	94.7	73.1	41.0	0.6	0.2	627.3	14.4	12.8	27.3	1,062.6	18.3	3.3	4.4	7.7	31.6	0.0	57.5	1,774.7				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3				
L2	350.9	139.4	18.4	13.0	1.1	0.5	523.3	21.8	0.0	21.8	886.4	6.3	4.7	5.1	9.8	3.8	0.0	19.9	1,451.4				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	88,458.6	44,513.2	36,726.1	12,496.7	34.9	13.0	182,242.5	25.5	5.6	31.0	308,718.9	7,336.5	1,608.1	1,377.3	2,985.4	7,019.1	0.0	17,341.0	508,333.4				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	11,223.9	5,220.4	1,196.5	509.4	19.2	7.6	18,176.9	109.5	67.7	177.2	30,791.7	277.2	179.1	202.4	381.5	257.3	0.0	916.0	50,061.9				
L7	10,999.6	3,727.0	1,975.5	856.1	11.5	4.3	17,574.0	33.7	9.5	43.3	29,770.4	435.7	130.2	155.8	286.0	230.5	0.0	952.2	48,339.9				
R1	371.7	122.2	13.6	10.4	3.2	1.4	522.5	115.6	77.3	192.9	885.1	3.6	4.4	5.3	9.7	8.4	0.0	21.7	1,622.1				
R1-1	64.8	36.1	12.0	10.2	0.1	0.0	123.2	13.1	4.0	17.1	208.8	5.6	1.4	1.9	3.3	3.4	0.0	12.3	361.4				
R1-2	78.4	77.5	2.6	0.6	2.4	0.9	162.6	12.6	1.4	14.0	275.5	1.1	3.0	4.5	7.4	0.6	0.0	9.1	461.3				
R1-3	102.9	78.6	2.3	2.8	1.8	0.7	189.0	8.5	0.0	8.5	320.1	0.9	2.6	2.4	5.1	2.7	0.0	8.6	526.2				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	148.9	36.7	6.1	2.2	0.4	0.2	194.6	10.1	1.3	11.4	329.6	1.5	1.2	1.7	2.9	3.1	0.0	7.6	543.1				
R1-6	103.4	10.2	0.1	0.1	0.5	0.2	114.4	7.9	3.2	11.2	193.9	0.1	0.4	0.5	0.9	0.1	0.0	1.0	320.5				
R2	4.4	0.8	0.0	0.0	0.0	0.0	5.3	0.0	0.0	0.0	9.0	0.0	0.0	0.0	0.1	0.0	0.0	0.1	14.3				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	145.3	90.2	4.3	0.2	1.3	0.5	241.9	11.7	13.4	25.0	409.7	0.6	3.0	3.4	6.3	1.4	0.0	8.3	684.9				
R5	400.1	141.6	43.0	19.6	2.0	0.8	607.0	31.3	7.6	38.9	1,028.3	18.8	4.8	5.8	10.6	10.4	0.0	39.8	1,714.0				
R6	3,167.5	2,483.9	724.5	347.5	22.5	8.9	6,754.8	80.8	4.3	85.1	11,442.7	152.8	81.9	76.1	158.0	208.7	0.0	519.6	18,802.2				
R7	385.2	234.9	221.4	27.9	0.7	0.3	870.3	0.0	6.4	6.4	1,474.3	14.3	7.8	8.8	16.5	16.3	0.0	47.1	2,398.1				
R8	3,361.4	1,486.1	862.8	421.2	2.8	1.3	6,135.7	8.0	6.9	14.8	10,393.8	136.8	50.5	56.5	107.0	72.7	0.0	316.5	16,880.8				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	120,995.9	58,952.9	42,110.1	14,859.0	111.9	43.5	237,073.2	667.5	278.2	945.7	401,602.2	8,462.4	2,102.0	1,931.8	4,033.8	7,929.6	0.0	20,425.8	660,047.0				

表式-3			被害額（事業実施前H15） 資産+10%						水系名：由良川			河川名：由良川						流量規模：1/100			(百万円)		
地区 ブロック	家屋		家庭用品		一般資産被害額		農漁家資産		小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考	
					償却	在庫	償却	在庫		稲	畑作物	清掃労働対償			代替活動等	小計							
	L1	868.3	323.5	52.6	15.6	6.0	2.3	1,268.3	73.6	51.7	125.3	2,148.6	16.3	11.3	13.9	25.1	24.1	0.0	65.5	3,607.8			
L1-1	23.2	4.1	2.2	1.0	0.0	0.0	30.5	2.6	0.0	2.6	51.6	0.8	0.5	1.0	1.5	0.9	0.0	3.2	87.9				
L1-2	25.7	12.7	0.5	0.0	0.1	0.0	38.9	0.0	0.0	0.0	65.9	0.1	0.5	0.9	1.4	0.4	0.0	2.0	106.7				
L1-3	211.0	75.6	15.7	5.1	0.7	0.3	308.3	6.7	0.0	6.7	522.3	6.0	2.7	3.8	6.5	6.1	0.0	18.6	855.9				
L1-4	138.0	64.1	3.9	2.2	1.2	0.5	209.9	2.8	1.9	4.6	355.6	1.3	2.2	2.6	4.8	2.3	0.0	8.4	578.4				
L1-5	466.5	111.1	128.4	22.6	1.9	0.8	731.2	21.5	1.0	22.5	1,238.6	24.0	3.6	3.7	7.3	20.8	0.0	52.0	2,044.2				
L1-6	789.6	483.7	166.7	119.3	5.2	2.0	1,566.5	14.6	0.8	15.4	2,653.7	41.8	16.4	14.9	31.3	57.7	0.0	130.8	4,366.4				
L1-7	111.2	97.0	39.1	11.0	0.9	0.4	259.5	19.6	0.1	19.7	439.7	9.7	3.0	4.1	7.1	9.9	0.0	26.8	745.7				
L1-8	281.7	129.7	19.1	14.9	2.0	0.8	448.2	5.6	0.3	5.9	759.3	6.1	4.4	5.4	9.7	11.3	0.0	27.2	1,240.6				
L1-9	199.5	46.1	8.7	12.6	1.0	0.4	268.3	11.1	2.1	13.2	454.5	3.8	1.6	1.7	3.3	3.1	0.0	10.2	746.2				
L1-10	62.1	55.6	16.9	10.5	0.2	0.1	145.3	23.8	1.1	24.9	246.2	4.5	2.1	2.4	4.5	3.7	0.0	12.8	429.1				
L1-11	1,554.5	559.0	273.4	144.0	2.1	0.9	2,534.0	15.4	13.0	28.5	4,292.5	66.9	18.9	22.8	41.6	103.9	0.0	212.4	7,067.4				
L1-12	123.3	32.4	2.0	0.9	0.3	0.1	159.0	3.8	0.0	3.8	289.3	0.7	1.5	2.8	4.3	1.9	0.0	6.9	439.0				
L2	692.6	295.2	42.5	35.4	2.9	1.2	1,069.7	23.1	0.0	23.1	1,812.1	14.2	9.8	9.7	19.5	8.8	0.0	42.5	2,947.5				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	170,481.3	68,747.8	52,470.1	18,906.3	55.4	19.1	310,680.0	26.0	5.6	31.6	526,292.0	13,537.3	2,574.3	1,770.1	4,344.4	10,900.1	0.0	28,781.8	865,785.4				
L5	27,100.6	9,927.0	4,728.7	2,679.4	15.6	5.5	44,456.7	15.8	5.1	20.9	75,309.7	1,106.2	329.3	258.0	587.3	717.1	0.0	2,410.6	122,198.0				
L6	20,285.1	9,919.0	1,948.8	877.5	39.9	15.7	33,066.0	122.2	70.2	192.5	56,013.7	435.3	320.8	310.6	631.3	438.3	0.0	1,504.9	90,777.1				
L7	14,718.3	5,890.5	2,854.0	1,289.7	12.5	4.8	24,769.7	43.0	12.2	55.2	41,959.8	637.4	207.0	252.4	459.4	295.2	0.0	1,392.1	68,176.8				
R1	1,191.2	442.9	29.5	24.7	10.5	3.9	1,702.7	124.9	80.0	204.8	2,884.4	9.0	15.1	17.2	32.3	21.5	0.0	62.9	4,854.9				
R1-1	131.1	88.2	25.2	22.1	0.2	0.1	266.8	13.4	4.5	17.9	452.0	10.3	2.6	3.4	6.0	7.3	0.0	23.6	760.3				
R1-2	190.5	238.0	7.1	2.4	5.4	2.3	445.7	13.2	1.5	14.7	755.0	2.0	7.8	8.7	16.4	1.6	0.0	20.0	1,235.3				
R1-3	156.9	133.3	4.0	5.0	2.9	1.1	303.2	8.8	0.0	8.8	513.6	1.4	4.4	3.9	8.2	4.8	0.0	14.5	840.1				
R1-4	15.6	3.5	0.0	0.0	0.1	0.0	19.3	2.5	0.0	2.5	32.7	0.0	0.1	0.2	0.3	0.0	0.0	0.3	54.8				
R1-5	665.9	188.5	29.6	12.1	2.0	0.8	899.0	11.1	1.3	12.4	1,523.0	7.2	6.8	7.6	14.4	17.2	0.0	38.7	2,473.2				
R1-6	315.1	48.5	1.3	0.9	1.3	0.5	367.6	9.7	3.5	13.2	622.7	0.5	1.8	2.5	4.3	1.3	0.0	6.1	1,009.6				
R2	52.5	6.1	1.5	0.1	0.2	0.1	60.3	0.1	0.0	0.1	102.2	0.3	0.3	0.4	0.7	0.2	0.0	1.2	163.8				
R3	4,329.2	2,322.4	198.0	131.8	18.8	6.8	7,007.1	46.5	22.1	68.6	11,870.0	50.3	77.2	67.6	144.7	99.7	0.0	294.7	19,240.4				
R4	340.8	166.9	7.2	0.4	2.4	0.9	518.6	12.0	13.4	25.4	878.5	1.0	5.6	5.8	11.4	2.6	0.0	15.0	1,437.6				
R5	968.6	309.7	70.3	26.7	4.6	1.8	1,381.6	33.8	7.9	41.7	2,340.4	32.4	10.1	9.8	19.9	16.3	0.0	68.0	3,832.2				
R6	5,153.0	3,754.0	907.1	487.1	35.6	12.7	10,359.6	104.7	9.6	114.2	17,549.1	221.0	119.7	96.7	216.4	302.3	0.0	739.6	29,762.5				
R7	800.9	477.1	416.9	59.9	1.4	0.5	1,756.8	0.0	6.6	6.6	2,976.0	27.6	15.5	14.0	29.5	33.1	0.0	90.2	4,829.5				
R8	7,581.8	3,367.6	1,410.1	812.6	6.7	2.5	13,181.3	9.1	7.2	16.3	22,329.0	259.1	106.5	88.1	194.6	157.7	0.0	611.4	36,138.0				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	260,005.8	108,320.9	65,880.7	25,743.8	239.7	88.7	460,279.6	821.2	322.8	1,144.0	779,713.5	16,534.6	3,883.3	3,006.4	6,889.6	13,271.1	0.0	36,695.3	1,277,832.3				

形式-3	被害額（現況H26） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/1				(百万円)				
左記 ブロック	一般資産被害額								農作物被害額				家屋における 応急対策費用								小計	合計	備考
	家屋	家具用品	事業所資産		農漁家資産		小計	水箱	畑作物	小計	公共土木施設等被害額	富害停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害						
			償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計								
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

[illegible]

記号	被害額（現況H26）		資産+10%				水系名：由良川				河川名：由良川				流量規模：1/5				（百万円）	
	家庭	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	富家停止損失	家庭における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
			償却	在庫	償却	在庫	小計	水稲	畑作物	小計			清掃労働対価	代替活動等	小計					
L1	16.1	0.0	2.8	0.4	0.1	0.0	19.4	38.7	28.3	67.0	32.9	0.9	0.0	0.0	0.0	0.6	0.0	1.5	120.8	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	14.8	6.2	0.9	0.7	0.1	0.0	22.6	4.9	0.0	4.9	38.3	0.4	0.2	0.2	0.4	0.5	0.0	1.3	67.1	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	0.0	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	
L1-6	2.3	1.4	0.6	0.3	0.0	0.0	4.6	0.4	0.0	0.4	7.8	0.2	0.1	0.1	0.1	0.1	0.0	0.4	13.2	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.0	1.4	6.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.4	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	5.3	5.2	3.9	1.2	0.0	0.0	15.6	4.5	3.8	8.3	26.4	0.4	0.2	0.2	0.4	0.9	0.0	1.6	52.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	27.2	12.7	0.3	0.4	0.0	0.0	40.6	19.9	22.8	42.7	68.8	0.1	0.5	0.7	1.2	0.4	0.0	1.7	153.8	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	4.0	0.7	0.3	0.2	0.0	0.0	5.2	58.9	41.8	100.7	8.7	0.1	0.0	0.0	0.1	0.1	0.0	0.2	114.8	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.1	0.0	0.0	0.0	0.0	0.0	0.1	3.2	0.0	3.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.3	
R1-3	23.0	19.7	0.7	0.8	0.4	0.2	44.7	7.2	0.0	7.2	75.8	0.2	0.7	0.7	1.4	0.7	0.0	2.3	130.1	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	10.1	6.5	0.4	0.0	0.1	0.0	17.2	8.0	7.5	15.5	29.1	0.1	0.3	0.4	0.7	0.1	0.0	0.9	62.7	
R5	3.6	1.2	0.2	0.1	0.0	0.0	5.1	1.1	3.2	4.3	8.6	0.1	0.0	0.1	0.1	0.1	0.0	0.2	18.2	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	106.3	53.7	10.0	4.0	0.7	0.3	175.0	152.7	109.1	261.8	296.5	2.3	1.8	2.5	4.3	3.5	0.0	10.1	743.4	

避難 ブロック	被害額（現況H26）				資産+10%				水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)																							
	一般資産被害額								農作物被害額								家屋における 応急対策費用				事業所にお ける応急対 策費用				事業所にお ける応急対 策費用				その他の間 接被害				小計				合計				備考			
	事業所資産		農漁家資産		小計		水稲		畑作物		小計		公共土木施設等被害額		富害等損失																													
家屋	家財用品	償却	在庫	償却	在庫	小計	水稲	畑作物	小計	公共土木施設等被害額	富害等損失	清掃労働対価	代修活動等	小計	事業所における応急対策費用	事業所における応急対策費用	その他の間接被害	小計	合計	備考																								
L1	59.0	2.0	10.3	2.0	0.2	0.1	73.7	56.8	45.5	102.4	124.9	3.1	0.2	0.4	0.6	2.9	0.0	6.6	307.5																									
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
L1-3	32.3	10.5	2.0	1.5	0.1	0.0	46.4	5.8	0.0	5.8	78.7	0.8	0.4	0.5	0.9	1.3	0.0	2.9	133.9																									
L1-4	14.1	6.0	0.2	0.2	0.1	0.1	20.7	1.7	1.2	2.9	35.0	0.1	0.2	0.4	0.6	0.2	0.0	0.9	59.6																									
L1-5	114.9	13.2	48.4	5.8	0.3	0.1	182.8	19.2	0.8	20.0	309.7	8.2	0.6	0.9	1.5	5.7	0.0	15.4	527.9																									
L1-6	140.9	88.1	36.9	19.9	0.9	0.4	287.1	16.7	0.8	17.5	486.3	7.9	3.0	3.9	6.8	9.2	0.0	23.9	814.8																									
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.1	0.0	6.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.2																								
L1-8	1.2	0.1	3.3	4.8	0.0	0.0	9.4	3.4	0.4	3.8	15.9	1.0	0.0	0.0	0.0	1.7	0.0	2.7	31.8																									
L1-9	10.2	1.9	0.3	0.1	0.1	0.0	12.6	9.9	1.9	11.8	21.4	0.2	0.1	0.1	0.1	0.1	0.0	0.4	46.2																									
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
L1-11	138.4	29.6	40.5	23.8	0.2	0.1	232.6	14.8	13.2	28.1	394.0	9.0	0.9	1.0	1.9	21.7	0.0	32.7	687.3																									
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1																								
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
L4	23,781.5	11,845.5	10,850.1	2,930.1	10.8	4.6	49,422.6	22.9	5.3	28.2	83,721.9	2,397.0	441.9	654.1	1,095.9	1,576.7	0.0	5,069.7	138,242.4																									
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
L6	3,434.3	1,032.2	282.3	118.5	10.6	4.2	4,882.3	97.2	53.6	150.8	8,270.5	74.5	38.2	63.9	102.0	45.1	0.0	221.5	13,525.1																									
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
R1	68.4	18.2	3.1	2.7	0.4	0.2	93.0	106.9	71.6	178.7	157.5	0.8	0.7	1.0	1.7	1.0	0.0	3.4	432.5																									
R1-1	3.1	0.3	0.3	0.1	0.0	0.0	3.8	2.0	0.2	2.2	6.4	0.3	0.0	0.1	0.1	0.1	0.0	0.5	12.9																									
R1-2	6.1	13.1	0.0	0.0	0.5	0.2	19.9	6.3	1.4	7.7	32.7	0.0	0.5	0.8	1.3	0.0	0.0	1.3	62.6																									
R1-3	59.2	46.5	1.3	1.6	1.1	0.4	110.0	8.0	0.0	8.0	186.4	0.5	1.5	1.4	2.9	1.7	0.0	5.1	309.6																									
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4																								
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
R4	78.1	45.8	2.6	0.1	0.6	0.2	127.4	11.2	12.4	23.5	215.6	0.4	1.7	2.2	3.9	0.8	0.0	5.1	371.9																									
R5	73.7	27.4	9.4	3.3	0.2	0.1	114.1	28.9	7.4	36.3	193.3	6.6	1.0	1.5	2.5	2.1	0.0	11.3	354.9																									
R6	795.0	674.5	206.4	66.2	7.2	3.0	1,754.4	55.3	0.8	56.1	2,971.9	53.7	23.6	34.9	58.5	52.7	0.0	164.9	4,947.3																									
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																								
合計	26,810.4	13,855.0	11,497.6	3,182.7	33.4	13.7	57,392.7	473.5	216.9	690.4	97,223.2	2,564.0	514.5	766.8	1,281.3	1,722.8	0.0	5,568.2	160,874.5																									

様式-3	被害額（現況H26） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)				
地区 ブロック	家屋		家庭用品		一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の関係被害	小計	合計	備考
					事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対価		代替活動等	小計					
	償却	在庫	償却	在庫	小計	水稲	畑作物	小計							清掃労働対価	代替活動等							
L1	159.0	21.1	19.6	5.2	0.8	0.3	206.0	67.9	51.0	118.9	348.9	5.9	0.8	1.4	2.2	6.3	0.0	14.4	688.2				
L1-1	6.9	1.2	0.6	0.3	0.0	0.0	8.9	0.0	0.0	0.0	15.1	0.2	0.2	0.3	0.4	0.2	0.0	0.9	24.9				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	86.3	29.6	5.6	2.9	0.3	0.1	124.8	6.5	0.0	6.5	211.3	2.5	1.1	1.4	2.5	3.2	0.0	8.3	350.9				
L1-4	53.4	24.8	1.2	0.8	0.5	0.2	80.9	2.1	1.8	3.9	137.0	0.6	0.8	1.2	2.0	0.8	0.0	3.3	225.0				
L1-5	256.6	51.3	86.3	13.4	0.9	0.4	408.8	20.5	1.0	21.5	692.5	14.7	1.6	2.0	3.6	12.3	0.0	30.6	1,153.4				
L1-6	360.4	218.9	87.5	54.3	2.5	1.0	724.6	18.4	0.8	19.2	1,227.5	19.6	7.3	7.8	15.1	25.4	0.0	60.1	2,031.4				
L1-7	7.5	5.9	5.8	1.2	0.1	0.0	20.5	13.1	0.0	13.1	34.8	2.0	0.4	0.7	1.1	1.2	0.0	4.2	72.6				
L1-8	27.4	6.2	5.7	7.8	0.2	0.1	47.4	5.9	0.5	6.4	80.3	2.3	0.3	0.6	0.9	3.6	0.0	6.8	140.9				
L1-9	64.5	11.5	2.2	2.2	0.4	0.1	80.8	10.8	2.0	12.8	137.0	1.3	0.4	0.5	0.9	0.7	0.0	2.9	233.5				
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-11	706.6	199.3	124.0	72.6	1.0	0.4	1,103.9	21.1	16.8	37.9	1,870.1	33.4	7.1	9.8	17.0	58.3	0.0	108.6	3,120.6				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.0	0.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	87,983.6	44,308.4	36,591.9	12,435.7	34.8	12.9	181,367.4	25.5	5.6	31.1	307,236.3	7,303.2	1,600.5	1,374.2	2,974.7	6,973.2	0.0	17,251.1	505,885.8				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	11,566.1	5,510.7	1,200.8	515.7	24.3	9.9	18,827.6	109.0	59.6	168.6	31,893.9	278.8	186.2	211.1	397.3	259.6	0.0	935.7	51,825.8				
L7	10,999.6	3,727.0	1,975.5	856.1	11.5	4.3	17,574.0	33.8	9.5	43.3	29,770.4	435.7	130.2	155.8	286.0	230.5	0.0	952.2	48,340.0				
R1	235.3	59.3	8.7	7.9	1.7	0.7	313.5	116.6	78.8	195.5	531.1	2.3	2.1	2.6	4.7	3.3	0.0	10.4	1,050.5				
R1-1	70.7	39.7	12.1	10.4	0.1	0.0	133.1	16.8	6.5	23.3	225.4	5.6	1.4	2.1	3.5	3.5	0.0	12.6	394.4				
R1-2	119.2	121.7	4.0	1.3	3.2	1.3	250.7	17.0	1.4	18.4	424.7	1.4	4.0	5.6	9.5	0.9	0.0	11.8	705.6				
R1-3	101.0	78.1	2.2	2.7	1.8	0.7	186.5	8.4	0.0	8.4	315.9	0.9	2.6	2.3	4.9	2.6	0.0	8.3	519.1				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	54.7	10.6	0.6	0.1	0.2	0.1	66.4	5.7	0.7	6.4	112.5	0.1	0.4	0.6	1.0	0.3	0.0	1.3	186.6				
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	145.3	90.2	4.3	0.2	1.3	0.5	241.9	11.6	13.2	24.8	409.7	0.6	3.0	3.4	6.3	1.4	0.0	8.3	684.7				
R5	577.6	184.2	46.3	19.2	3.1	1.2	831.7	32.9	7.6	40.5	1,408.8	18.8	6.0	6.5	12.5	10.9	0.0	42.2	2,323.2				
R6	3,261.7	2,537.3	733.6	354.1	23.0	9.1	6,918.7	84.9	4.4	89.3	11,720.3	154.9	83.5	77.2	160.7	212.3	0.0	528.0	19,256.2				
R7	385.2	234.9	221.4	27.9	0.7	0.3	870.3	0.0	6.4	6.4	1,474.3	14.3	7.8	8.8	16.5	16.3	0.0	47.1	2,398.1				
R8	3,361.4	1,486.1	862.8	421.2	2.8	1.3	6,135.7	8.0	6.9	14.8	10,393.8	136.8	50.5	56.5	107.0	72.7	0.0	316.5	16,880.8				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	120,590.0	58,958.2	42,002.5	14,813.2	115.1	44.9	236,523.9	636.8	274.6	911.5	400,671.5	8,435.7	2,098.1	1,932.1	4,030.3	7,899.5	0.0	20,365.4	658,472.3				

様式～3			被害額（現況H26） 資産+10%						水系名： 由良川				河川名： 由良川				流量規模： 1/100				(百万円)		
地区 ブロック	家屋		家庭用品		一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の関係被害	小計	合計	備考	
					事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対価	代替活動等	小計						
	償却	在庫	償却	在庫	小計	水稲	畑作物	小計															清掃労働対価
L1	562.4	146.2		51.4	14.3	3.8	1.4	779.4	74.6	52.0	126.6	1,320.4	15.4	6.0	9.6	15.6	17.6	0.0	48.7	2,275.1			
L1-1	24.5	4.4	2.3	1.0	0.0	0.0	0.0	32.2	2.6	0.0	2.6	54.6	0.9	0.6	1.1	1.6	0.9	0.0	3.4	92.9			
L1-2	16.6	6.6	0.3	0.0	0.0	0.0	0.0	23.5	0.0	0.0	0.0	39.8	0.1	0.4	0.7	1.0	0.3	0.0	1.4	64.7			
L1-3	244.6	93.4	18.5	6.4	0.9	0.4	364.1	6.9	0.0	6.9	616.8	6.6	3.0	4.3	7.3	7.2	0.0	21.2	1,008.9				
L1-4	128.9	60.9	3.5	2.1	1.1	0.4	196.8	2.5	1.9	4.4	333.4	1.2	2.1	2.3	4.4	2.2	0.0	7.8	542.5				
L1-5	477.2	112.6	132.8	23.1	1.9	0.8	748.4	22.1	1.0	23.1	1,267.7	24.6	3.6	3.8	7.4	21.4	0.0	53.4	2,092.6				
L1-6	711.8	441.9	159.2	111.2	4.8	1.9	1,430.8	19.0	1.0	20.0	2,423.8	38.4	14.9	14.0	28.9	53.6	0.0	120.8	3,995.4				
L1-7	99.1	88.2	36.1	10.1	0.8	0.3	234.7	18.8	0.1	18.9	397.6	9.3	2.8	4.0	6.8	9.5	0.0	25.5	676.7				
L1-8	199.5	82.4	16.0	13.2	1.3	0.6	312.9	6.2	0.4	6.6	530.0	5.4	3.1	4.2	7.2	9.1	0.0	21.7	871.2				
L1-9	174.3	39.0	8.3	11.9	0.9	0.4	234.7	11.1	2.1	13.2	397.6	3.6	1.3	1.4	2.7	2.8	0.0	9.1	654.6				
L1-10	1.9	2.3	1.4	0.3	0.0	0.0	6.1	0.0	0.6	0.6	10.3	0.4	0.1	0.1	0.2	0.3	0.0	0.9	17.9				
L1-11	2,321.3	817.3	366.9	203.9	3.0	1.2	3,713.6	21.9	16.7	38.7	6,290.8	90.0	26.7	28.7	55.4	137.1	0.0	282.5	10,325.6				
L1-12	124.6	35.1	2.1	0.9	0.3	0.1	163.2	3.9	0.0	3.9	276.4	0.8	1.6	2.8	4.4	1.9	0.0	7.1	450.5				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	170,420.0	68,742.0	52,469.5	18,906.1	55.3	19.1	310,612.0	26.0	5.6	31.6	526,176.8	13,537.2	2,574.0	1,770.0	4,344.0	10,899.8	0.0	28,781.0	865,601.5				
L5	26,957.0	9,845.7	4,722.3	2,671.6	15.5	5.5	44,217.6	15.7	5.0	20.7	74,904.5	1,102.4	327.1	257.2	584.3	714.2	0.0	2,400.9	121,543.7				
L6	19,928.8	9,802.7	1,929.3	866.5	40.0	16.0	32,583.3	121.2	61.6	182.8	55,196.1	431.9	317.9	308.2	626.1	434.4	0.0	1,492.4	89,454.5				
L7	14,697.8	5,883.7	2,851.6	1,288.7	12.4	4.8	24,739.0	43.0	12.2	55.2	41,907.8	636.9	206.7	251.9	458.6	294.9	0.0	1,390.5	68,092.4				
R1	899.3	264.1	33.7	20.7	6.9	2.6	1,217.4	126.5	81.3	207.8	2,062.2	7.3	9.9	12.8	22.7	12.4	0.0	42.3	3,529.7				
R1-1	156.3	104.5	31.4	30.5	0.2	0.1	323.0	17.2	6.5	23.8	547.2	12.0	3.4	3.9	7.2	9.5	0.0	28.8	922.7				
R1-2	275.9	287.9	11.3	4.3	6.2	2.6	588.2	17.7	1.5	19.1	996.4	2.9	9.9	10.0	19.9	2.7	0.0	25.6	1,629.3				
R1-3	156.9	133.3	4.0	5.0	2.9	1.1	303.2	8.8	0.0	8.8	513.6	1.4	4.4	3.9	8.2	4.8	0.0	14.5	840.1				
R1-4	9.7	0.7	0.0	0.0	0.0	0.0	10.5	2.5	0.0	2.5	17.7	0.0	0.0	0.1	0.1	0.0	0.0	0.1	30.8				
R1-5	459.1	125.3	19.0	7.1	1.5	0.6	612.6	11.2	1.4	12.6	1,037.7	4.0	4.3	5.1	9.4	9.7	0.0	23.2	1,686.0				
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	4,251.6	2,289.4	195.2	128.4	18.7	6.8	6,890.0	46.6	22.1	68.7	11,671.7	49.3	76.0	66.9	142.8	97.2	0.0	289.4	18,919.7				
R4	412.9	184.7	7.8	0.4	2.7	1.1	609.5	12.0	13.5	25.4	1,032.6	1.1	6.3	6.4	12.6	2.8	0.0	16.5	1,684.0				
R5	976.8	301.6	69.8	25.3	4.8	1.8	1,380.0	33.7	7.9	41.6	2,337.7	31.3	9.8	9.7	19.6	15.0	0.0	65.9	3,825.2				
R6	5,342.3	3,877.3	921.9	511.5	36.9	13.0	10,702.8	104.9	9.8	114.7	18,130.5	228.5	123.4	98.2	221.6	312.3	0.0	762.3	29,710.3				
R7	800.9	477.1	416.9	59.9	1.4	0.5	1,756.8	0.0	6.7	6.7	2,976.0	27.6	15.5	14.0	29.5	33.1	0.0	90.2	4,829.5				
R8	7,581.8	3,367.6	1,410.1	812.6	6.7	2.5	13,181.3	9.1	7.2	16.3	22,329.0	259.1	106.5	88.1	194.6	157.7	0.0	611.4	36,138.0				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	258,413.7	107,617.8	65,882.7	25,737.0	230.8	85.4	457,967.3	785.8	318.0	1,103.8	775,796.7	16,529.6	3,861.1	2,983.1	6,844.2	13,264.4	0.0	36,638.2	1,271,506.1				

[illegible]

形式・3 パレット	被害額（緊急水防災整備H27） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/2				(百万円)		
	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃活動対価	代替活動等	小計						
			償却	在庫	償却	在庫															
L1	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.8	5.0	2.9	7.9	1.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10.0	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.2	10.5	12.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	12.7	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
合計	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.8	7.2	13.7	20.9	1.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	23.0	

形式-3	被害額（緊急水防災整備H27） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/10				(百万円)		
	近路 ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	富集停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の関係被害	小計	合計	備考
				事業所資産		農漁客資産		小計	水稲	畑作物	小計			清掃労働対価	代経活動等	小計					
				償却	在庫	償却	在庫														
L1	30.8	0.0	0.0	6.4	0.8	0.1	0.1	38.3	47.1	37.5	84.6	64.9	1.6	0.0	0.0	0.0	1.3	0.0	2.9	190.7	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	28.2	9.7	1.7	1.5	0.1	0.0	0.0	41.2	5.4	0.0	5.4	69.8	0.6	0.3	0.3	0.7	1.2	0.0	2.5	118.9	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	2.3	0.1	0.1	0.0	0.0	0.0	0.0	2.5	8.6	1.9	10.5	4.2	0.1	0.0	0.0	0.1	0.0	0.0	0.2	17.2	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	661.0	293.1	5.4	7.5	5.6	2.2	2.2	974.7	43.7	39.3	83.0	1,651.1	2.2	10.3	16.4	26.7	3.3	0.0	32.2	2,741.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	14.3	2.0	1.1	1.0	0.0	0.0	0.0	18.4	95.2	63.3	158.5	31.1	0.3	0.1	0.1	0.2	0.3	0.0	0.7	268.7	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.4	0.7	0.0	0.0	0.0	0.0	0.0	1.1	5.6	0.4	6.0	1.9	0.0	0.1	0.2	0.3	0.0	0.0	0.3	9.2	
R1-3	32.6	26.5	0.9	1.0	0.6	0.2	0.2	61.7	7.6	0.0	7.6	104.5	0.3	0.9	0.8	1.7	1.0	0.0	2.9	176.7	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	23.3	19.5	1.2	0.0	0.3	0.1	0.1	44.4	9.4	9.3	18.8	75.2	0.2	0.7	0.9	1.6	0.3	0.0	2.1	140.4	
R5	33.8	10.5	3.4	1.1	0.1	0.0	0.0	49.0	27.8	6.6	34.3	83.0	2.4	0.5	0.7	1.2	0.8	0.0	4.4	170.7	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	826.6	362.1	20.1	13.0	6.8	2.7	2.7	1,231.2	250.6	158.2	408.7	2,085.6	7.5	12.8	19.5	32.4	8.3	0.0	48.1	3,773.6	

近道 ブロック	被害額（緊急水防災整備化） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)	
	家屋		家庭用品		一般資産被害額		農作物被害額		公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の関係被害	小計	合計	備考			
					償却	在庫	償却	在庫			清掃労働対価	代替活動等								
L1	58.2	1.5	10.5	2.0	0.2	0.1	72.5	57.4	46.0	103.4	122.8	3.1	0.2	0.3	0.5	3.0	0.0	6.5	305.2	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	56.4	19.0	2.7	2.3	0.2	0.1	80.6	6.0	0.0	6.0	136.5	1.3	0.7	0.7	1.3	2.2	0.0	4.8	227.9	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	0.0	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.3	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	12.5	1.9	0.3	0.1	0.1	0.0	14.9	10.0	1.9	11.9	25.3	0.2	0.1	0.1	0.1	0.1	0.0	0.4	52.6	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	23,781.5	11,845.5	10,850.1	2,930.1	10.8	4.6	49,422.6	22.8	5.3	28.1	83,721.9	2,397.0	441.9	654.1	1,095.9	1,576.7	0.0	5,069.7	138,242.3	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	3,436.1	1,032.9	282.3	118.5	10.6	4.2	4,884.7	97.3	53.7	151.0	8,274.7	74.5	38.2	64.0	102.3	45.1	0.0	221.8	13,532.1	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	46.1	5.3	2.9	2.5	0.2	0.1	57.0	107.3	72.7	180.0	96.6	0.7	0.2	0.3	0.5	0.8	0.0	1.9	335.5	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	7.1	13.1	0.0	0.0	0.5	0.2	20.9	6.4	1.4	7.8	35.4	0.0	0.5	0.8	1.3	0.0	0.0	1.3	65.4	
R1-3	59.2	46.5	1.3	1.6	1.1	0.4	110.0	8.1	0.0	8.1	186.4	0.5	1.5	1.4	2.9	1.7	0.0	5.1	309.6	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	78.1	45.8	2.6	0.1	0.6	0.2	127.4	11.2	12.3	23.5	215.6	0.4	1.7	2.2	3.9	0.8	0.0	5.1	371.8	
R5	73.7	27.4	9.4	3.3	0.2	0.1	114.1	28.8	7.4	36.2	193.3	6.6	1.0	1.5	2.5	2.1	0.0	11.3	354.8	
R6	795.0	674.5	206.4	68.2	7.2	3.0	1,754.4	55.3	0.8	56.1	2,971.9	53.7	23.6	34.9	58.5	52.7	0.0	164.9	4,947.3	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	28,404.0	13,713.3	11,368.5	3,128.8	31.7	13.0	56,659.2	418.0	201.4	619.4	95,980.7	2,537.8	509.6	760.2	1,269.8	1,685.1	0.0	5,492.7	158,752.1	

様式-3		被害額（緊急水防災整備H27） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)	
地区 ブロック	一般資産被害額		農作物被害額				小計	水稲	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考	
			事業所資産		農漁家資産								家屋における 応急対策費用								
	償却	在庫	償却	在庫	清掃労働対価	代替活動等							小計								
L1	154.6	14.4	19.9	5.3	0.8	0.3	195.3	69.0	51.5	120.5	330.8	6.0	0.6	1.1	1.8	6.4	0.0	14.2	660.8		
L1-1	6.9	1.2	0.6	0.3	0.0	0.0	8.9	0.1	0.0	0.1	15.1	0.2	0.2	0.3	0.4	0.2	0.0	0.9	25.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	100.8	33.8	6.5	3.2	0.3	0.1	144.8	6.5	0.0	6.5	245.4	3.0	1.3	1.7	3.0	3.6	0.0	9.6	406.3		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	7.6	7.1	6.0	1.3	0.1	0.0	22.1	14.2	0.0	14.2	37.4	2.0	0.4	0.7	1.1	1.3	0.0	4.4	78.0		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-9	64.5	11.5	2.2	2.2	0.4	0.1	80.8	10.8	2.0	12.8	137.0	1.3	0.4	0.5	0.9	0.7	0.0	2.9	233.5		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.0	0.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	87,952.9	44,294.6	36,545.2	12,432.1	34.8	12.9	181,272.6	25.5	5.6	31.0	307,075.8	7,300.7	1,600.2	1,373.7	2,974.0	6,971.7	0.0	17,246.4	505,625.9		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	11,584.4	5,514.5	1,200.8	515.7	24.3	9.9	18,849.6	109.3	59.7	169.0	31,931.3	278.8	186.4	211.5	397.9	259.6	0.0	936.3	51,886.1		
L7	10,999.6	3,727.0	1,975.5	856.1	11.5	4.3	17,574.0	33.7	9.5	43.3	29,770.4	435.7	130.2	155.8	286.0	230.5	0.0	952.2	48,339.9		
R1	175.8	22.0	8.0	7.2	1.1	0.5	214.5	116.9	79.2	196.1	363.3	2.1	0.9	1.3	2.2	2.6	0.0	6.8	780.7		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	18.6	48.9	0.0	0.0	1.7	0.7	69.8	7.2	1.4	8.6	118.3	0.0	1.7	2.3	4.0	0.0	0.0	4.0	200.8		
R1-3	101.0	78.1	2.2	2.7	1.8	0.7	186.5	8.4	0.0	8.4	315.9	0.9	2.6	2.3	4.9	2.6	0.0	8.3	519.1		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	145.3	90.2	4.3	0.2	1.3	0.5	241.9	11.6	13.2	24.8	409.7	0.6	3.0	3.4	6.3	1.4	0.0	8.3	684.7		
R5	577.6	184.2	46.3	19.2	3.1	1.2	831.7	32.9	7.6	40.4	1,408.8	18.8	6.0	6.5	12.5	10.9	0.0	42.2	2,323.1		
R6	3,261.7	2,537.3	733.6	354.1	23.0	9.1	6,918.7	85.0	4.4	89.4	11,720.3	154.9	83.5	77.2	160.7	212.3	0.0	528.0	19,256.3		
R7	385.2	234.9	221.4	27.9	0.7	0.3	870.3	0.0	6.4	6.4	1,474.3	14.3	7.8	8.8	16.5	16.3	0.0	47.1	2,398.1		
R8	3,361.4	1,486.1	862.8	421.2	2.8	1.3	6,135.7	8.0	6.9	14.8	10,393.8	136.8	50.5	56.5	107.0	72.7	0.0	316.5	16,880.8		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	118,897.8	58,285.8	41,635.3	14,648.6	107.7	41.9	233,617.2	539.6	247.2	786.8	395,747.5	8,356.0	2,075.5	1,903.6	3,979.1	7,792.9	0.0	20,128.0	650,279.5		

表式-3		被害額（緊急水防災整備H27） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)		
地区 ブロック	家屋		家庭用品		一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の関係被害	小計	合計	備考
					事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対価	代替活動等	小計					
	償却	在庫	償却	在庫	小計	水稲	畑作物	小計														
L1	555.9	132.8	52.5	14.7	3.8	1.4	761.1	74.8	52.2	127.0	1,289.3	15.7	5.6	9.4	15.0	17.9	0.0	48.6	2,226.0			
L1-1	34.8	6.2	3.2	1.5	0.0	0.0	45.7	2.6	0.0	2.6	77.5	1.2	0.8	1.5	2.3	1.3	0.0	4.8	130.6			
L1-2	23.6	12.2	0.4	0.0	0.1	0.0	36.3	0.0	0.0	0.0	61.5	0.1	0.5	0.8	1.3	0.4	0.0	1.8	99.6			
L1-3	253.7	97.6	19.4	6.4	0.9	0.4	378.4	6.9	0.0	6.9	641.0	6.8	3.2	4.4	7.6	7.5	0.0	21.9	1,048.2			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	619.7	146.8	154.6	28.0	2.4	0.9	952.3	23.9	1.4	25.3	1,613.1	32.4	4.5	4.0	8.5	26.7	0.0	67.5	2,658.2			
L1-6	885.4	552.6	181.2	132.0	5.9	2.2	1,759.4	21.8	1.0	22.8	2,980.4	47.9	18.3	16.6	34.9	67.1	0.0	149.8	4,912.3			
L1-7	111.2	97.0	39.1	11.0	0.9	0.4	259.5	19.6	0.1	19.7	439.7	9.7	3.0	4.1	7.1	9.9	0.0	26.8	745.7			
L1-8	229.8	103.5	17.2	13.6	1.6	0.7	366.3	10.5	0.5	11.0	620.5	5.6	3.7	4.8	8.5	9.7	0.0	23.8	1,021.6			
L1-9	174.3	39.0	8.3	11.9	0.9	0.4	234.7	11.1	2.1	13.2	397.6	3.6	1.3	1.4	2.7	2.8	0.0	9.1	654.6			
L1-10	1.9	2.3	1.4	0.3	0.0	0.0	6.1	0.0	0.6	0.6	10.3	0.4	0.1	0.1	0.2	0.3	0.0	0.9	17.9			
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-12	124.6	35.1	2.1	0.9	0.3	0.1	163.2	3.9	0.0	3.9	276.4	0.8	1.6	2.8	4.4	1.9	0.0	7.1	450.5			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	170,428.2	68,743.7	52,472.4	18,907.3	55.3	19.1	310,626.0	26.0	5.6	31.6	526,200.5	13,538.7	2,574.2	1,770.4	4,344.6	10,900.4	0.0	28,783.7	865,641.9			
L5	26,957.0	9,845.7	4,722.3	2,671.6	15.5	5.5	44,217.6	15.7	5.1	20.8	74,904.5	1,102.4	327.1	257.2	584.3	714.2	0.0	2,400.9	121,543.8			
L6	19,928.8	9,803.9	1,929.3	866.5	40.0	16.0	32,584.6	121.1	61.5	182.6	55,198.2	431.9	317.9	308.2	626.1	434.5	0.0	1,492.5	89,457.8			
L7	14,697.8	5,883.7	2,851.6	1,288.7	12.4	4.8	24,739.0	43.1	12.1	55.2	41,907.8	636.9	206.7	251.9	458.6	294.9	0.0	1,390.5	68,092.4			
R1	783.1	184.0	23.3	19.8	5.2	2.0	1,017.4	126.6	81.3	207.8	1,723.5	6.9	7.8	11.8	19.6	11.4	0.0	38.0	2,986.8			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	293.8	333.6	11.6	4.6	6.9	2.8	653.3	18.0	1.5	19.4	1,106.7	3.1	11.1	10.5	21.6	2.9	0.0	27.7	1,807.1			
R1-3	156.9	133.3	4.0	5.0	2.9	1.1	303.2	8.8	0.0	8.8	513.6	1.4	4.4	3.9	8.2	4.8	0.0	14.5	840.1			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	514.2	140.1	20.1	7.8	1.7	0.7	684.6	11.9	1.7	13.6	1,159.6	4.2	4.8	5.3	10.1	10.7	0.0	25.0	1,882.7			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	4,265.4	2,307.1	196.2	130.2	18.7	6.8	6,924.4	46.6	22.1	68.7	11,730.0	49.9	76.4	67.0	143.4	98.8	0.0	292.0	19,015.1			
R4	412.9	184.7	7.8	0.4	2.7	1.1	609.5	12.1	13.5	25.5	1,032.6	1.1	6.3	6.4	12.6	2.8	0.0	16.5	1,684.1			
R5	976.8	301.6	69.8	25.3	4.8	1.8	1,380.0	33.7	7.9	41.6	2,337.7	31.3	9.8	9.7	19.6	15.0	0.0	65.9	3,825.1			
R6	5,342.3	3,877.3	921.9	511.5	36.9	13.0	10,702.8	104.7	9.8	114.5	18,130.5	228.5	123.4	98.2	221.6	312.3	0.0	762.3	29,710.1			
R7	800.9	477.1	416.9	59.9	1.4	0.5	1,756.8	0.0	6.7	6.7	2,976.0	27.6	15.5	14.0	29.5	33.1	0.0	90.2	4,829.5			
R8	7,581.8	3,367.6	1,410.1	812.6	6.7	2.5	13,181.3	9.1	7.2	16.3	22,329.0	259.1	106.5	88.1	194.6	157.7	0.0	611.4	36,138.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	256,154.9	106,808.3	65,536.9	25,531.6	227.7	83.9	454,343.3	752.5	293.6	1,046.1	769,657.5	16,447.2	3,834.3	2,952.6	6,787.0	13,138.8	0.0	36,373.0	1,261,419.9			

延延 ブロック	被害額（当面整備H32） 資産+10%						水系名：由良川			河川名：由良川			流量規模：1/20					(百万円)		
	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	富家停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対 価	代修活動等	小計					
			償却	在庫	償却	在庫														
L1	61.4	1.3	10.4	2.0	0.2	0.1	75.4	59.3	47.1	106.4	127.7	3.0	0.1	0.3	0.4	3.0	0.0	6.4	315.9	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	57.8	19.2	2.8	2.3	0.2	0.1	82.4	6.1	0.0	6.1	139.6	1.3	0.7	0.7	1.4	2.3	0.0	5.0	233.1	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	20,547.7	9,813.4	9,062.0	2,373.6	9.4	3.9	41,810.1	24.6	5.3	29.9	70,826.3	2,120.4	371.6	590.5	962.1	1,318.8	0.0	4,401.4	117,067.7	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	3,173.8	894.2	262.1	111.9	9.7	3.7	4,455.4	91.6	45.4	137.0	7,547.5	72.1	34.0	58.1	82.1	42.4	0.0	206.6	12,346.6	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	43.3	1.5	2.1	1.6	0.3	0.1	48.9	108.8	75.1	184.9	82.7	0.4	0.1	0.0	0.1	0.4	0.0	0.9	317.4	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	8.0	13.8	0.0	0.0	0.5	0.2	22.5	6.6	1.4	8.0	38.0	0.0	0.6	0.9	1.5	0.0	0.0	1.5	70.1	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	171.9	89.6	15.8	6.0	0.6	0.3	284.1	0.0	0.0	0.0	481.3	2.7	3.0	4.4	7.4	1.6	0.0	11.6	777.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	24,063.8	10,833.0	9,355.2	2,487.5	20.9	8.4	46,778.8	298.0	174.3	472.3	79,243.2	2,200.0	410.1	654.9	1,065.0	1,368.4	0.0	4,633.5	131,127.7	

様式-3		被害額（当面整備H32） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)			
沿道 ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対償												
			償却	在庫	償却	在庫					清掃労働対償	代替活動等	小計										
L1	175.6	9.7	20.4	5.8	0.9	0.3	212.6	70.0	51.7	121.7	360.2	6.0	0.4	0.7	1.1	7.8	0.0	14.8	709.4				
L1-1	6.9	1.2	0.6	0.3	0.0	0.0	8.9	0.1	0.0	0.1	15.1	0.2	0.2	0.3	0.4	0.2	0.0	0.9	25.0				
L1-2	2.5	0.5	0.1	0.0	0.0	0.0	3.0	0.0	0.0	0.0	5.1	0.0	0.1	0.1	0.2	0.1	0.0	0.3	8.4				
L1-3	110.1	36.0	7.6	3.4	0.3	0.1	157.6	6.5	0.0	6.5	267.0	3.4	1.4	2.0	3.5	3.9	0.0	10.8	441.9				
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-8	0.1	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	69,064.9	34,792.8	30,757.6	10,042.9	27.1	10.8	144,696.0	25.5	5.5	30.9	245,115.0	5,895.0	1,283.5	1,232.5	2,516.0	5,482.7	0.0	13,893.7	403,735.7				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	11,076.3	5,176.3	1,189.1	509.9	21.8	8.6	17,982.0	100.3	46.1	146.4	30,461.5	277.4	175.7	198.6	374.3	256.2	0.0	908.0	49,497.8				
L7	10,999.6	3,727.0	1,975.5	856.1	11.5	4.3	17,574.0	33.7	9.5	43.3	29,770.4	435.7	130.2	155.8	286.0	230.5	0.0	952.2	48,339.9				
R1	160.6	4.2	6.7	5.2	1.2	0.5	178.4	118.8	79.7	198.4	302.1	1.6	0.2	0.2	0.3	1.4	0.0	3.3	682.3				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	23.1	63.7	0.0	0.0	2.0	0.8	89.6	7.2	1.5	8.7	151.8	0.0	2.0	2.6	4.6	0.0	0.0	4.6	254.7				
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R5	718.3	234.1	64.0	24.7	3.6	1.4	1,046.1	46.0	10.1	56.1	1,772.0	30.3	7.6	8.1	15.7	13.7	0.0	59.7	2,933.9				
R6	3,239.0	2,531.9	732.2	353.3	22.9	9.0	6,908.3	83.0	4.4	87.3	11,702.7	154.5	83.4	77.1	160.5	211.7	0.0	526.7	19,225.1				
R7	385.2	234.9	221.4	27.9	0.7	0.3	870.3	0.0	6.4	6.4	1,474.3	14.3	7.8	8.8	16.5	16.3	0.0	47.1	2,398.0				
R8	3,361.4	1,486.1	862.8	421.2	2.8	1.3	6,135.7	8.0	6.9	14.8	10,393.8	136.8	50.5	56.5	107.0	72.7	0.0	316.5	16,880.8				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.2	0.0	1.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.2				
合計	99,343.5	48,298.3	35,837.9	12,250.6	94.8	37.4	195,862.5	500.4	221.7	722.1	331,791.2	6,955.1	1,742.9	1,743.3	3,486.1	6,297.4	0.0	16,738.6	545,114.4				

様式-3		被害額（当面整備H32） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)					
沿道 ブロック	一般家宅被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用				事業所における応急対策費用	その他の関係被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対償		代替活動等				小計								
			償却	在庫	償却	在庫																			
L1	574.0	118.6	38.4	12.4	3.9	1.5	748.8	75.7	52.1	127.9	1,268.5	12.7	5.0	8.7	13.8	17.8	0.0	44.3	2,189.5						
L1-1	23.2	4.1	2.2	1.0	0.0	0.0	30.5	2.6	0.0	2.6	51.6	0.8	0.5	1.0	1.5	0.9	0.0	3.2	87.9						
L1-2	25.7	12.7	0.5	0.0	0.1	0.0	38.9	0.0	0.0	0.0	65.9	0.1	0.5	0.9	1.4	0.4	0.0	2.0	106.7						
L1-3	273.0	108.7	22.1	6.5	1.0	0.4	411.6	6.8	0.0	6.8	697.3	7.2	3.7	4.7	8.4	8.1	0.0	23.7	1,139.4						
L1-4	162.6	84.4	4.3	2.6	1.4	0.6	255.8	3.2	2.1	5.3	433.3	1.6	2.7	2.9	5.7	2.7	0.0	10.0	704.4						
L1-5	619.7	146.8	154.6	28.0	2.4	0.9	952.3	24.0	1.4	25.4	1,613.1	32.4	4.5	4.0	8.5	26.7	0.0	67.5	2,658.3						
L1-6	993.5	640.3	198.3	146.4	6.8	2.5	1,987.7	23.0	1.1	24.2	3,367.2	52.9	20.7	18.6	39.3	72.3	0.0	164.4	5,543.6						
L1-7	199.8	171.9	61.6	20.4	1.4	0.6	455.8	20.4	0.1	20.6	772.1	14.9	5.7	6.0	11.7	18.2	0.0	44.7	1,293.2						
L1-8	249.5	112.9	17.9	13.9	1.8	0.8	396.8	10.5	0.5	11.0	672.1	5.7	3.9	5.0	8.9	10.1	0.0	24.8	1,104.7						
L1-9	197.9	44.1	8.4	12.3	1.0	0.4	264.1	19.8	3.4	23.2	447.3	3.7	1.5	1.7	3.2	3.1	0.0	10.0	744.6						
L1-10	1.9	2.8	1.6	0.4	0.0	0.0	6.8	0.0	0.6	0.6	11.5	0.4	0.1	0.1	0.2	0.4	0.0	1.0	19.9						
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L4	152,582.1	64,980.2	49,373.3	17,844.8	51.1	17.7	284,849.3	25.6	5.6	31.2	482,534.6	12,128.1	2,390.1	1,652.9	4,043.1	10,497.0	0.0	26,668.1	794,083.2						
L5	19,815.8	7,234.7	3,720.4	1,908.9	11.7	4.4	32,695.8	19.6	6.1	25.7	55,386.6	811.7	242.6	217.5	460.1	582.2	0.0	1,854.0	89,962.0						
L6	16,947.3	8,188.9	1,744.9	830.5	31.0	11.7	27,754.3	110.7	52.5	163.2	47,015.8	418.8	265.9	254.2	520.2	418.3	0.0	1,357.3	76,290.6						
L7	14,682.6	5,875.7	2,849.4	1,287.8	12.4	4.7	24,712.6	43.1	12.2	55.3	41,863.1	636.5	206.6	251.6	458.2	294.5	0.0	1,389.3	68,020.3						
R1	610.0	85.8	18.8	15.6	4.3	1.6	736.1	128.7	81.7	210.3	1,246.9	5.6	4.8	8.7	13.5	8.1	0.0	27.1	2,220.5						
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-2	305.0	337.9	12.0	4.7	6.9	2.8	669.4	18.0	1.5	19.5	1,133.9	3.2	11.4	11.0	22.4	3.0	0.0	28.6	1,851.4						
R1-3	170.0	146.2	4.1	5.3	3.2	1.2	330.1	10.3	0.0	10.3	559.2	1.5	4.7	4.0	8.7	5.2	0.0	15.4	915.1						
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-5	554.7	150.3	23.2	9.1	1.8	0.7	739.9	11.9	1.7	13.6	1,253.3	5.0	5.2	6.0	11.2	12.4	0.0	28.6	2,035.4						
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R4	1,263.4	428.2	16.1	1.2	6.7	2.5	1,718.1	16.4	8.5	24.8	2,910.5	2.5	14.1	12.7	26.9	6.4	0.0	35.7	4,689.1						
R5	1,167.6	380.6	88.0	32.4	5.6	2.1	1,676.1	46.4	10.2	56.6	2,839.4	46.4	12.2	11.6	23.8	20.0	0.0	90.2	4,662.3						
R6	5,278.2	3,833.4	914.2	504.5	36.3	12.9	10,579.6	104.8	9.7	114.5	17,921.8	224.5	122.2	97.8	220.1	307.5	0.0	752.1	29,368.0						
R7	800.9	477.1	416.9	59.9	1.4	0.5	1,756.8	0.0	6.6	6.6	2,976.0	27.6	15.5	14.0	29.5	33.1	0.0	90.2	4,829.5						
R8	7,581.8	3,367.6	1,410.1	812.6	6.7	2.5	13,181.3	9.1	7.2	16.3	22,329.0	259.1	106.5	88.1	194.6	157.7	0.0	611.4	36,138.0						
HR2	35.4	15.2	15.3	3.2	0.1	0.0	69.2	3.7	0.0	3.7	117.3	1.7	0.7	1.2	1.9	1.6	0.0	5.2	195.4						
合計	225,115.6	96,949.0	61,116.6	23,564.2	199.1	73.0	407,017.5	734.5	264.7	999.3	689,487.5	14,704.7	3,451.4	2,685.1	6,136.5	12,507.6	0.0	33,348.8	1,130,853.0						

[illegible][illegible]

[illegible][illegible]

形式 - 3	被害額（緊急対策整備H34） 資産+10%						水害名：由良川			河川名：由良川				流量規模：1/100				(百万円)						
	避難 ブロック	一般資産被害額										農作物被害額				家屋における 応急対策費用				事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考
		事業所資産		農漁家資産		小計		水稲	畑作物	小計	公共土木施設等被害額	富害等損失	清掃労働対 価	代経活動等	小計									
家屋	家庭用品	償却	在庫	償却	在庫																			
L1	680.2	171.4	44.5	14.2	4.5	1.7	916.6	76.8	52.1	128.9	1,552.7	14.3	6.3	10.9	17.1	20.9	0.0	52.3	2,650.4					
L1-1	23.9	4.2	2.2	1.0	0.0	0.0	31.4	2.6	0.0	2.6	53.2	0.8	0.5	1.0	1.6	0.9	0.0	3.3	90.5					
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-3	369.4	149.4	30.2	10.5	1.3	0.5	561.2	9.1	0.0	9.1	950.7	9.1	4.9	5.7	10.5	12.1	0.0	31.7	1,552.8					
L1-4	185.7	86.1	6.0	2.8	1.4	0.6	282.6	3.2	2.1	5.4	478.7	2.1	2.8	3.1	5.9	3.3	0.0	11.1	777.9					
L1-5	658.8	159.1	160.4	30.0	2.5	0.9	1,011.7	24.2	1.4	25.6	1,713.8	33.5	5.1	4.4	9.5	28.1	0.0	71.3	2,822.2					
L1-6	1,079.5	680.8	208.2	156.8	7.7	2.8	2,136.7	23.1	1.1	24.2	3,619.6	56.6	22.0	19.5	41.5	76.5	0.0	174.6	5,955.0					
L1-7	211.3	180.1	63.7	21.5	1.6	0.7	478.8	20.6	0.1	20.7	811.0	15.5	6.0	6.1	12.1	18.5	0.0	46.2	1,356.7					
L1-8	303.0	136.7	19.8	15.3	2.2	0.9	477.8	10.5	0.5	11.1	809.5	6.2	4.6	5.5	10.1	12.0	0.0	28.3	1,326.7					
L1-9	239.5	61.2	11.1	17.6	1.2	0.5	331.1	20.0	3.4	23.4	560.9	5.1	2.1	2.1	4.2	4.2	0.0	13.5	928.9					
L1-10	62.1	54.1	15.4	9.8	0.2	0.1	141.8	25.9	1.2	27.1	240.1	3.8	1.9	2.1	4.0	3.6	0.0	11.4	420.4					
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L4	157,558.4	65,848.1	50,207.6	18,141.2	51.7	17.9	291,824.9	26.0	5.6	31.6	494,351.4	12,543.1	2,436.1	1,668.8	4,104.9	10,610.2	0.0	27,258.3	813,466.2					
L5	19,815.8	7,234.7	3,720.4	1,908.9	11.7	4.4	32,695.8	19.6	6.1	25.7	55,386.6	811.7	242.6	217.5	460.1	582.2	0.0	1,854.0	89,962.0					
L6	17,970.6	8,820.9	1,763.9	838.2	33.8	12.9	29,440.4	140.6	65.8	206.4	49,872.1	422.8	286.3	279.0	565.3	421.9	0.0	1,410.0	80,928.8					
L7	14,682.6	5,875.7	2,849.4	1,287.8	12.4	4.7	24,712.6	43.1	12.1	55.2	41,863.1	636.5	206.6	251.6	458.2	294.5	0.0	1,389.3	68,020.2					
R1	712.5	115.3	20.0	17.1	5.2	1.9	872.1	129.6	81.6	211.2	1,477.3	6.3	5.7	10.3	16.0	8.7	0.0	30.9	2,591.5					
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-2	412.6	465.0	12.4	4.9	10.4	3.9	909.1	23.8	1.7	25.5	1,540.1	3.3	14.9	13.6	28.5	3.2	0.0	34.9	2,509.7					
R1-3	170.0	146.8	4.1	5.4	3.3	1.2	330.8	10.3	0.0	10.3	560.5	1.6	4.7	4.0	8.7	5.3	0.0	15.5	917.1					
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-5	715.8	204.9	30.8	12.3	2.5	1.0	967.3	11.9	1.7	13.6	1,638.6	7.3	7.2	8.3	15.5	17.6	0.0	40.4	2,659.9					
R1-6	292.5	44.5	1.3	0.9	1.2	0.5	340.9	12.6	4.9	17.6	577.4	0.5	1.6	2.3	3.9	1.2	0.0	5.5	941.4					
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R3	1,546.7	846.3	87.7	56.8	6.5	2.7	2,546.6	28.1	17.2	45.3	4,313.8	20.7	28.8	30.7	59.5	44.0	0.0	124.2	7,029.9					
R4	1,124.0	396.8	14.8	1.1	6.0	2.3	1,535.0	16.3	8.4	24.7	2,600.3	2.2	12.7	11.4	24.1	5.8	0.0	32.0	4,192.1					
R5	932.7	307.5	71.3	27.7	4.4	1.7	1,345.1	46.1	10.1	56.2	2,278.7	35.6	9.9	10.0	19.9	17.0	0.0	72.4	3,752.5					
R6	5,094.1	3,725.6	904.7	495.1	35.4	12.6	10,267.6	104.7	9.4	114.1	17,393.4	219.8	118.5	95.8	214.3	301.0	0.0	735.1	28,510.3					
R7	800.9	477.1	416.9	59.9	1.4	0.5	1,756.8	0.0	6.7	6.7	2,279.0	27.6	15.5	14.0	29.5	33.1	0.0	90.2	4,829.5					
R8	7,581.8	3,367.6	1,410.1	812.6	6.7	2.5	13,181.3	9.1	7.2	16.3	22,329.0	259.1	106.5	88.1	194.6	157.7	0.0	611.4	36,138.0					
HR2	35.4	15.2	15.3	3.2	0.1	0.0	69.2	3.7	0.0	3.7	117.3	1.7	0.7	1.2	1.9	1.6	0.0	5.2	195.4					
合計	233,259.9	99,565.0	62,093.1	23,952.5	215.3	79.4	419,165.3	841.5	300.5	1,142.1	710,065.8	15,146.7	3,554.3	2,766.9	6,321.2	12,685.0	0.0	34,152.9	1,164,526.0					

形式-3			被害額（事業実施後H56） 資産+10%				水系名：由良川				河川名：由良川				流量規模：1/1				(百万円)					
左記 ブロック	一般資産被害額								農作物被害額				家屋における 応急対策費用							事業所にお ける応急対 策費用	その他の間 接被害額	小計	合計	備考
	家庭		家庭用品		事業所資産		農漁家資産		小計	水稲	畑作物	小計	公共土木施設等被害額	富害停止損失	家屋における 応急対策費用									
	償却	在庫	償却	在庫	償却	在庫	償却	在庫							清掃労働対価	代修活動等	小計							
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

[illegible]

[illegible][illegible]

形式-3	被審額（事業実施後H56） 資産+10%							水系名：由良川				河川名：由良川				流量規模： 1/20				(百万円)		
形態 ブロック	一般資産被審額										公共土木施設等被審額	富貴等止損 失	家屋における 応急対策費用			事業所にお ける応急対 策費用	その他の間 接被審	小計	合計	備考		
	家屋	家屋用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対 価	代稼活動等	小計							
			償却	在庫	償却	在庫																
L1	70.0	0.4	11.6	2.3	0.3	0.1	84.5	59.6	47.5	107.2	143.2	3.4	0.0	0.0	0.0	3.4	0.0	6.9	341.8			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	54.9	1.5	3.1	2.1	0.4	0.2	62.3	110.7	75.0	185.7	105.5	0.5	0.1	0.0	0.1	0.5	0.0	1.1	354.6			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	124.9	1.9	14.7	4.4	0.7	0.3	146.8	170.3	122.5	292.9	248.7	3.9	0.1	0.1	0.1	3.9	0.0	8.0	696.4			

様式-3			被害額（事業実施後H56） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)			
区域 ブロック	家屋	家庭用品	一般資産被害額						小計	農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用				事業所における応急対策費用	その他の関係被害	小計	合計	備考
			事業所資産		農漁家資産		水稲	畑作物		小計	清掃労働対償	代替活動等	小計											
			償却	在庫	償却	在庫																		
L1	191.8	6.2	20.6	5.9	1.0	0.4	225.9	70.6	51.7	122.3	382.6	6.2	0.2	0.4	0.6	7.9	0.0	14.7	745.4					
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-8	0.6	0.0	0.0	0.0	0.0	0.0	0.6	0.2	0.0	0.2	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.7					
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-10	0.0	0.0	0.1	0.0	0.0	0.0	0.1	0.0	0.1	0.1	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.5					
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1	170.9	4.3	6.9	5.4	1.2	0.5	189.3	119.1	79.9	199.0	320.6	1.6	0.2	0.2	0.4	1.5	0.0	3.5	712.4					
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R8	936.3	323.7	210.7	81.8	0.9	0.3	1,553.6	2.9	1.7	4.6	2,631.8	46.9	13.0	23.0	36.0	15.8	0.0	98.6	4,288.7					
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
合計	1,299.5	334.2	238.2	93.1	3.1	1.3	1,969.4	192.8	133.5	326.2	3,336.2	54.7	13.4	23.6	37.0	25.2	0.0	116.9	5,748.7					

様式-3			被害額（事業実施後H56） 資産+10%					水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)		
地区 ブロック			一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対償	代替活動等	小計							
			償却	在庫	償却	在庫																
L1	666.7	153.5	44.3	14.2	4.4	1.7	884.8	77.0	52.1	129.1	1,498.9	14.3	5.9	10.4	16.3	20.8	0.0	51.4	2,564.2			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	369.4	149.4	30.2	10.5	1.3	0.5	561.2	9.1	0.0	9.1	950.7	9.1	4.9	5.7	10.5	12.1	0.0	31.7	1,552.8			
L1-4	185.7	86.1	6.0	2.8	1.4	0.6	282.6	3.2	2.1	5.4	478.7	2.1	2.8	3.1	5.9	3.3	0.0	11.3	777.9			
L1-5	658.8	159.1	160.4	30.0	2.5	0.9	1,011.7	24.2	1.4	25.6	1,713.8	33.5	5.1	4.4	9.5	28.1	0.0	71.1	2,822.3			
L1-6	1,068.5	680.8	208.9	156.1	7.7	2.8	2,124.7	23.1	1.1	24.2	3,599.3	55.8	22.0	19.5	41.5	76.4	0.0	173.8	5,921.9			
L1-7	210.8	179.7	63.3	21.4	1.6	0.7	477.4	20.6	0.1	20.7	808.7	15.5	6.0	6.1	12.1	18.5	0.0	46.1	1,352.9			
L1-8	303.0	136.7	19.8	15.3	2.2	0.9	477.9	10.5	0.5	11.1	809.5	6.2	4.6	5.5	10.1	12.0	0.0	28.3	1,326.7			
L1-9	239.5	61.2	11.1	17.6	1.2	0.5	331.1	19.9	3.4	23.3	560.9	5.1	2.1	2.1	4.2	4.2	0.0	13.5	928.8			
L1-10	62.1	54.1	15.4	9.8	0.2	0.1	141.8	25.9	1.2	27.1	240.1	3.8	1.9	2.1	4.0	3.6	0.0	11.4	420.4			
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	123,659.9	57,362.9	44,865.6	15,922.9	43.7	15.5	241,870.4	24.8	5.5	30.3	409,728.5	9,955.2	2,069.3	1,543.0	3,612.3	9,425.5	0.0	22,993.1	674,622.2			
L5	19,815.8	7,234.7	3,720.4	1,908.9	11.7	4.4	32,695.8	19.6	6.1	25.7	55,386.6	811.7	242.6	217.5	460.1	582.2	0.0	1,854.0	89,962.0			
L6	6,887.2	2,526.3	552.2	238.0	18.7	8.0	10,230.4	140.2	68.4	208.6	17,330.3	122.0	82.9	114.0	196.9	93.5	0.0	412.4	28,181.8			
L7	10,092.3	3,852.6	1,703.1	751.7	7.5	2.9	16,410.1	42.7	12.1	54.8	27,798.7	440.6	143.6	184.4	328.0	186.1	0.0	954.7	45,218.3			
R1	712.5	115.3	20.0	17.1	5.2	1.9	872.1	129.8	81.5	211.3	1,477.3	6.3	5.7	10.3	16.0	8.7	0.0	30.9	2,591.6			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	412.6	465.0	12.4	4.9	10.4	3.9	909.1	23.8	1.7	25.5	1,540.1	3.3	14.9	13.6	28.5	3.2	0.0	34.9	2,509.7			
R1-3	170.0	146.8	4.1	5.4	3.3	1.2	330.8	10.3	0.0	10.3	560.5	1.6	4.7	4.0	8.7	5.3	0.0	15.5	917.1			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	711.0	202.2	30.7	12.3	2.4	0.9	959.6	11.9	1.7	13.6	1,625.5	7.3	7.1	8.2	15.4	17.6	0.0	40.2	2,638.9			
R1-6	292.5	44.5	1.3	0.9	1.2	0.5	340.9	12.6	4.9	17.5	577.4	0.5	1.6	2.3	3.9	1.2	0.0	5.5	941.3			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	1,442.1	812.6	84.8	55.1	6.1	2.5	2,403.2	27.8	17.2	45.0	4,071.0	20.2	27.5	29.8	57.3	42.8	0.0	120.2	6,639.5			
R4	1,196.8	416.1	15.9	1.1	6.5	2.5	1,638.9	16.4	8.4	24.8	2,776.3	2.4	13.6	12.5	26.1	6.2	0.0	34.6	4,474.7			
R5	755.0	269.7	77.1	31.2	3.1	1.2	1,136.9	40.8	8.6	49.5	1,925.9	43.8	8.7	9.0	17.6	17.4	0.0	78.8	3,191.1			
R6	2,892.3	2,161.2	678.6	296.9	19.1	8.0	6,057.0	108.8	8.0	116.8	10,280.6	136.0	72.2	74.4	146.5	176.9	0.0	459.4	16,893.7			
R7	403.9	251.0	236.4	29.9	0.7	0.3	922.2	0.0	6.4	6.4	1,562.2	14.9	8.2	9.1	17.2	17.1	0.0	49.3	2,540.1			
R8	5,292.2	2,337.7	1,156.6	610.5	4.5	1.9	9,403.4	8.7	7.4	16.0	15,929.3	193.8	76.4	74.3	150.6	111.8	0.0	456.3	25,805.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	178,500.5	79,858.5	53,719.8	20,164.3	166.6	64.2	332,473.9	831.8	299.9	1,131.7	563,210.7	11,904.7	2,834.2	2,364.9	5,199.1	10,874.6	0.0	27,978.4	924,794.7			

様式-3			被害額（事業実施前H15） 資産-10%				水系名：由良川				河川名：由良川				流量規模：1/1				(百万円)				
近郊 ブロック	家屋		一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等			小計								
	償却	在庫	償却	在庫																			
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

様式-3			被害額（事業実施前H15） 資産-10%				水系名：由良川				河川名：由良川				流量規模：1/2				(百万円)	
近郊 ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対 価	代替活動等	小計					
			償却	在庫	償却	在庫														
L1	1.6	0.0	0.0	0.0	0.0	0.0	1.6	5.0	3.3	8.3	2.8	0.1	0.0	0.0	0.0	0.0	0.0	0.1	12.8	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	1.0	0.2	0.0	0.0	0.0	0.0	1.1	0.0	0.7	0.7	1.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.7	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.2	0.0	0.0	0.0	0.0	0.0	0.3	2.5	9.3	11.8	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	12.6	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	2.8	0.2	0.0	0.0	0.0	0.0	3.0	7.7	13.7	21.4	5.1	0.1	0.0	0.0	0.0	0.0	0.0	0.1	29.7	

様式-3			被害額（事業実施前H15） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/3				(百万円)		
近郊 ブロック	家屋	家庭用品	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用				事業所における応急対策費用	その他の間接被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稻	畑作物	小計	家屋における応急対策費用												
			償却	在庫	償却	在庫					清掃労働対価	代替活動等			小計								
L1	5.4	0.0	0.7	0.1	0.0	0.0	6.3	13.1	11.8	24.9	10.7	0.4	0.0	0.0	0.0	0.2	0.0	0.6	42.5				
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2				
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-6	2.0	0.2	0.5	0.3	0.0	0.0	3.0	1.3	0.0	1.3	5.1	0.3	0.0	0.1	0.1	0.2	0.0	0.5	9.9				
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.4	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6				
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1				
L1-11	0.7	1.3	1.5	0.3	0.0	0.0	3.8	0.6	2.4	3.1	6.4	0.2	0.1	0.1	0.2	0.3	0.0	0.6	13.8				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	9.2	0.9	0.0	0.0	0.0	0.0	10.1	1.4	9.0	10.4	17.1	0.0	0.1	0.2	0.3	0.0	0.0	0.3	37.9				
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1	1.0	0.3	0.0	0.0	0.0	0.0	1.4	32.1	22.9	55.0	2.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	58.8				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.3	0.0	2.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.3				
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	0.3	0.0	0.0	0.0	0.0	0.0	0.4	0.0	0.0	0.0	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0				
R1-6	1.6	0.0	0.0	0.0	0.0	0.0	1.6	0.4	0.8	1.2	2.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.7				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5				
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	20.3	2.7	2.8	0.7	0.0	0.0	26.6	51.6	47.9	99.5	45.0	0.8	0.2	0.4	0.6	0.7	0.0	2.1	173.3				

様式-3		被害額（事業実施前H15） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/5				(百万円)	
近郊 ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考	
			事業所資産		農漁家資産		小計	水稻	畑作物	小計			家屋における 応急対策費用								
			償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計						
L1	14.9	0.7	2.5	0.4	0.1	0.0	18.6	31.7	22.6	54.3	31.5	1.0	0.0	0.0	0.1	0.8	0.0	1.8	106.2		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	12.1	5.0	0.8	0.5	0.0	0.0	18.5	3.9	0.0	3.9	31.3	0.4	0.2	0.2	0.4	0.5	0.0	1.3	55.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	0.0	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2		
L1-6	9.0	1.5	2.1	0.8	0.1	0.0	13.5	4.9	0.4	5.2	22.8	0.7	0.1	0.2	0.3	0.6	0.0	1.6	43.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.0	0.0	0.8	0.8	0.0	0.0	1.6	0.7	0.2	1.0	2.8	0.4	0.0	0.0	0.0	0.4	0.0	0.9	6.2		
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.5	1.2	5.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.7		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3		
L1-11	5.8	2.8	3.1	0.9	0.0	0.0	12.7	2.6	3.1	5.7	21.5	0.4	0.1	0.2	0.3	0.8	0.0	1.5	41.3		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	2.2	0.1	0.3	0.0	0.0	0.0	2.6	11.0	0.0	11.0	4.3	0.2	0.0	0.0	0.0	0.1	0.0	0.3	18.1		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	36.1	15.6	0.2	0.4	0.0	0.0	52.4	16.7	20.9	37.6	88.7	0.1	0.6	0.9	1.5	0.4	0.0	2.0	180.7		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	4.1	0.7	0.3	0.2	0.0	0.0	5.3	53.6	35.7	89.3	8.9	0.1	0.1	0.1	0.1	0.1	0.0	0.3	103.7		
R1-1	0.1	0.0	0.0	0.0	0.0	0.0	0.1	1.4	0.0	1.4	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.8		
R1-2	0.8	0.2	0.0	0.0	0.0	0.0	1.0	4.6	0.0	4.6	1.7	0.0	0.0	0.1	0.1	0.0	0.0	0.1	7.4		
R1-3	18.8	16.1	0.6	0.6	0.3	0.2	36.6	5.9	0.0	5.9	62.0	0.2	0.7	0.7	1.4	0.7	0.0	2.3	106.8		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	1.3	0.0	0.1	0.1	0.0	0.0	1.5	0.2	0.2	0.4	2.5	0.0	0.0	0.0	0.0	0.1	0.0	0.1	4.6		
R1-6	3.7	0.0	0.0	0.0	0.0	0.0	3.7	3.4	1.7	5.2	6.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	15.1		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	10.5	6.8	0.4	0.0	0.1	0.0	17.9	6.8	6.3	13.1	30.3	0.1	0.3	0.5	0.8	0.1	0.0	1.0	62.2		
R5	6.0	1.9	0.5	0.2	0.0	0.0	8.6	10.7	3.1	13.8	14.5	0.6	0.1	0.1	0.2	0.2	0.0	1.0	37.9		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	125.3	51.6	11.7	4.9	0.7	0.3	194.5	163.2	95.8	259.0	329.5	4.1	2.2	3.0	5.1	4.8	0.0	14.0	797.0		

様式-3			被害額（事業実施前H15） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/10				(百万円)	
地区 ブロック	家屋	家庭用品	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考
			事業所資産			農漁家資産			小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計					
			償却	在庫		償却	在庫															
L1	31.6	1.8	5.6	0.8	0.1	0.1	40.1	38.4	30.4	68.8	67.9	1.7	0.1	0.1	0.2	1.7	0.0	3.6	180.2			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	22.5	7.9	1.4	1.2	0.1	0.0	33.0	4.5	0.0	4.5	55.9	0.6	0.3	0.3	0.7	1.2	0.0	2.4	95.7			
L1-4	1.8	0.3	0.0	0.0	0.0	0.0	2.2	0.8	0.5	1.4	3.7	0.0	0.1	0.1	0.1	0.0	0.0	0.2	7.4			
L1-5	9.4	0.8	3.0	0.4	0.0	0.0	13.6	8.9	0.4	9.3	23.1	0.9	0.0	0.1	0.1	0.4	0.0	1.4	47.4			
L1-6	42.7	18.9	11.3	5.7	0.2	0.1	78.9	8.5	0.4	8.9	133.7	3.3	1.0	1.6	2.5	3.4	0.0	9.2	230.8			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.4	0.0	1.6	1.8	0.0	0.0	3.8	1.6	0.3	1.9	6.4	0.7	0.0	0.0	0.0	0.8	0.0	1.4	13.6			
L1-9	5.3	0.7	0.1	0.0	0.0	0.0	6.2	7.4	1.6	8.9	10.5	0.1	0.0	0.1	0.1	0.0	0.0	0.2	25.9			
L1-10	2.6	0.4	0.1	0.1	0.0	0.0	3.2	2.5	0.3	2.9	5.4	0.1	0.0	0.1	0.1	0.1	0.0	0.2	11.7			
L1-11	43.8	9.0	12.8	5.7	0.1	0.0	71.4	10.7	10.0	20.8	121.0	3.8	0.4	0.5	1.0	6.6	0.0	11.4	224.6			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1			
L2	79.5	31.2	3.0	0.6	0.1	0.0	114.5	12.9	0.0	12.9	193.9	1.2	1.2	1.4	2.6	1.2	0.0	5.0	326.2			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	17.6	2.2	2.8	1.0	0.0	0.0	23.5	0.0	0.0	0.0	39.8	1.6	0.4	0.7	1.1	0.8	0.0	3.5	66.7			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	185.2	59.3	1.5	1.8	0.4	0.1	248.4	37.1	38.4	75.6	420.8	0.8	4.0	6.6	10.6	1.4	0.0	12.8	757.6			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	18.9	5.3	1.1	0.9	0.1	0.0	26.4	78.5	51.6	130.0	44.6	0.3	0.3	0.4	0.7	0.5	0.0	1.5	202.5			
R1-1	6.8	4.8	1.0	0.8	0.0	0.0	13.4	8.6	1.8	10.5	22.7	0.5	0.2	0.3	0.5	0.3	0.0	1.4	47.9			
R1-2	4.5	2.1	0.0	0.0	0.1	0.0	6.6	7.2	0.3	7.5	11.2	0.0	0.1	0.2	0.3	0.0	0.0	0.3	25.7			
R1-3	26.6	21.6	0.7	0.8	0.5	0.2	50.5	6.2	0.0	6.2	85.5	0.3	0.9	0.8	1.7	1.0	0.0	2.9	145.1			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	5.3	0.7	0.4	0.2	0.0	0.0	6.6	1.2	0.2	1.4	11.1	0.1	0.0	0.1	0.1	0.3	0.0	0.5	19.6			
R1-6	13.4	0.1	0.0	0.0	0.0	0.0	13.6	4.0	2.1	6.1	23.0	0.0	0.0	0.0	0.1	0.0	0.0	0.1	42.8			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	19.0	17.0	1.0	0.0	0.2	0.1	37.4	7.9	8.5	16.4	63.3	0.2	0.7	1.0	1.7	0.3	0.0	2.2	119.3			
R5	32.1	9.5	2.9	0.9	0.1	0.0	45.5	23.0	5.5	28.5	77.0	2.4	0.5	0.9	1.4	0.9	0.0	4.7	155.7			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	569.0	193.7	50.3	22.7	2.1	0.8	838.6	270.1	152.4	422.5	1,420.6	18.5	10.3	15.2	25.4	20.8	0.0	64.6	2,746.4			

様式-3		被害額（事業実施前H15） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)		
地区 ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考		
			事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計							
			償却	在庫	償却	在庫																
L1	62.4	6.1	8.8	1.8	0.2	0.1	79.5	46.6	37.1	83.7	134.6	3.3	0.5	0.8	1.3	3.6	0.0	8.2	306.0			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	24.3	8.2	1.4	1.3	0.1	0.0	35.3	4.8	0.0	4.8	59.7	0.6	0.3	0.4	0.7	1.2	0.0	2.6	102.3			
L1-4	16.2	6.4	0.2	0.2	0.1	0.1	23.2	1.6	1.1	2.7	39.3	0.2	0.3	0.6	0.9	0.3	0.0	1.3	66.6			
L1-5	87.2	9.3	36.6	4.3	0.2	0.1	137.7	15.3	0.6	15.9	233.2	7.7	0.5	0.8	1.3	5.2	0.0	14.2	401.0			
L1-6	118.4	76.5	31.3	16.9	0.8	0.3	244.2	10.2	0.5	10.7	413.7	8.0	3.1	4.0	7.1	9.5	0.0	24.6	693.2			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.9	0.0	5.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	1.4	0.1	2.8	3.9	0.0	0.0	8.3	2.4	0.3	2.6	14.0	1.1	0.0	0.0	0.0	1.7	0.0	2.8	27.6			
L1-9	19.3	2.6	0.5	0.2	0.1	0.0	22.7	8.3	1.6	9.9	38.4	0.4	0.1	0.2	0.3	0.2	0.0	0.8	71.8			
L1-10	10.7	3.5	0.7	0.4	0.0	0.0	15.3	16.9	0.3	17.2	25.8	0.2	0.2	0.2	0.4	0.3	0.0	0.8	59.1			
L1-11	100.2	19.2	25.8	12.4	0.2	0.1	157.8	11.5	10.1	21.5	267.4	6.7	0.8	0.9	1.7	13.2	0.0	21.5	468.3			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1			
L2	125.7	52.0	5.5	2.6	0.3	0.1	186.1	13.1	0.0	13.1	315.3	2.6	2.1	2.5	4.6	1.6	0.0	8.8	523.2			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	19,741.1	9,854.2	9,021.3	2,447.1	9.0	3.8	41,076.5	18.8	4.4	23.2	69,583.7	2,420.4	449.1	659.4	1,108.5	1,602.7	0.0	5,131.6	115,814.9			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	2,265.9	562.0	206.1	85.4	3.9	1.5	3,124.7	77.9	49.0	126.9	5,293.3	69.3	28.3	49.1	77.4	39.8	0.0	186.4	8,731.2			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	80.9	25.8	3.2	2.2	0.7	0.3	113.0	87.4	59.1	146.5	191.4	1.1	1.2	1.8	3.0	1.9	0.0	6.1	457.0			
R1-1	12.7	9.5	2.1	1.7	0.0	0.0	26.0	10.4	2.2	12.6	44.1	1.1	0.4	0.5	0.9	0.7	0.0	2.7	85.4			
R1-2	17.0	15.9	0.1	0.1	0.4	0.2	33.6	8.6	1.1	9.7	57.0	0.0	0.7	0.9	1.6	0.1	0.0	1.7	102.1			
R1-3	48.4	38.1	1.0	1.3	0.9	0.3	90.0	6.6	0.0	6.6	152.5	0.5	1.5	1.4	2.9	1.7	0.0	5.1	254.2			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	10.3	2.3	0.8	0.4	0.0	0.0	13.9	3.0	0.3	3.3	23.5	0.2	0.1	0.1	0.2	0.7	0.0	1.1	41.8			
R1-6	27.0	0.9	0.0	0.0	0.1	0.0	28.1	4.6	2.5	7.0	47.6	0.0	0.0	0.1	0.1	0.0	0.0	0.1	82.8			
R2	1.2	0.2	0.0	0.0	0.0	0.0	1.5	0.0	0.0	0.0	2.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	64.5	39.3	2.2	0.1	0.5	0.2	106.8	9.2	10.1	19.3	180.9	0.4	1.8	2.2	4.0	0.8	0.0	5.2	312.2			
R5	102.9	36.2	10.9	3.8	0.5	0.2	154.4	24.7	6.0	30.7	261.5	7.3	1.6	2.4	3.9	2.9	0.0	14.1	460.7			
R6	140.6	73.3	12.9	4.9	0.5	0.2	232.4	0.0	0.0	0.0	393.8	2.7	3.0	4.4	7.4	1.6	0.0	11.6	637.8			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	23,078.5	10,841.5	9,374.0	2,590.9	18.5	7.6	45,911.0	387.6	186.3	573.9	77,773.2	2,533.5	495.6	732.5	1,228.1	1,689.6	0.0	5,451.3	129,709.4			

様式-3		被害額（事業実施前H15） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)		
地区 ブロック	家屋		一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の関係被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対償	代替活動等			小計							
	償却	在庫	償却	在庫	小計	水稻										畑作物	小計					
L1	232.9	62.1	17.7	4.9	1.4	0.6	319.4	55.1	41.4	96.5	541.1	6.6	2.7	4.1	6.7	8.0	0.0	21.4	978.4			
L1-1	5.6	1.0	0.5	0.2	0.0	0.0	7.3	0.0	0.0	0.0	12.3	0.2	0.2	0.3	0.4	0.2	0.0	0.9	20.5			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	70.6	24.3	4.5	2.4	0.2	0.1	102.1	5.3	0.0	5.3	172.9	2.5	1.1	1.4	2.5	3.2	0.0	8.3	288.6			
L1-4	44.9	20.3	1.1	0.6	0.4	0.2	67.5	1.9	1.4	3.4	114.4	0.6	0.8	1.2	2.0	0.8	0.0	3.4	188.6			
L1-5	190.8	41.2	65.9	10.5	0.7	0.3	309.4	16.5	0.8	17.3	524.2	13.0	1.6	2.0	3.6	11.0	0.0	27.6	878.5			
L1-6	323.8	187.6	80.5	50.5	2.2	0.9	645.5	11.5	0.6	12.1	1,093.4	22.0	7.5	8.1	15.6	28.9	0.0	66.5	1,817.5			
L1-7	6.9	6.1	5.5	1.1	0.1	0.0	19.8	11.7	0.0	11.7	33.5	2.4	0.4	0.8	1.3	1.5	0.0	5.2	70.1			
L1-8	30.6	8.6	5.3	6.7	0.2	0.1	51.5	3.8	0.3	4.0	87.2	2.4	0.5	0.8	1.3	3.9	0.0	7.6	150.3			
L1-9	63.6	12.7	2.7	2.9	0.4	0.1	82.4	8.9	1.6	10.6	139.5	1.6	0.5	0.6	1.1	1.0	0.0	3.7	236.2			
L1-10	21.3	12.0	3.0	1.7	0.1	0.0	38.1	18.3	0.3	18.7	64.5	0.9	0.5	0.7	1.2	0.9	0.0	3.0	124.2			
L1-11	341.7	77.5	59.8	33.6	0.5	0.2	513.2	11.8	10.5	22.3	869.4	18.3	3.3	4.4	7.7	31.6	0.0	57.5	1,462.5			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3			
L2	287.1	114.0	15.1	10.6	0.9	0.4	428.1	17.9	0.0	17.9	725.3	6.3	4.7	5.1	9.8	3.8	0.0	19.9	1,191.2			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	72,375.2	36,419.9	30,048.6	10,224.6	28.6	10.6	149,107.5	20.8	4.5	25.4	252,588.2	7,336.5	1,608.1	1,377.3	2,985.4	7,019.1	0.0	17,341.0	419,062.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	9,183.2	4,271.2	978.9	416.8	15.7	6.2	14,872.0	89.6	55.4	145.0	25,193.2	277.2	179.1	202.4	381.5	257.3	0.0	916.0	41,126.2			
L7	8,999.7	3,049.4	1,616.3	700.4	9.4	3.5	14,378.8	27.6	7.8	35.4	24,357.6	435.7	130.2	155.8	286.0	230.5	0.0	952.2	39,724.0			
R1	304.1	100.0	11.1	8.5	2.6	1.1	427.5	94.6	63.2	157.8	724.1	3.6	4.4	5.3	9.7	8.4	0.0	21.7	1,331.1			
R1-1	53.0	29.5	9.8	8.4	0.1	0.0	100.8	10.7	3.3	14.0	170.8	5.6	1.4	1.9	3.3	3.4	0.0	12.3	297.9			
R1-2	64.2	63.4	2.1	0.7	1.9	0.8	133.1	10.3	1.2	11.4	225.4	1.1	3.0	4.5	7.4	0.6	0.0	9.1	379.1			
R1-3	84.2	64.3	1.9	2.3	1.5	0.5	154.6	6.9	0.0	6.9	261.9	0.9	2.6	2.4	5.1	2.7	0.0	8.6	432.1			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	121.8	30.1	5.0	1.8	0.3	0.1	159.2	8.3	1.0	9.3	269.7	1.5	1.2	1.7	2.9	3.1	0.0	7.6	445.7			
R1-6	84.6	8.3	0.1	0.1	0.4	0.2	93.6	6.5	2.7	9.1	158.6	0.1	0.4	0.5	0.9	0.1	0.0	1.0	262.4			
R2	3.6	0.7	0.0	0.0	0.0	0.0	4.3	0.0	0.0	0.0	7.3	0.0	0.0	0.0	0.1	0.0	0.0	0.1	11.7			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	118.9	73.8	3.5	0.2	1.1	0.4	197.9	9.6	10.9	20.5	335.2	0.6	3.0	3.4	6.3	1.4	0.0	8.3	561.9			
R5	327.3	115.8	35.1	16.1	1.6	0.6	496.7	25.6	6.2	31.8	841.3	18.8	4.8	5.8	10.6	10.4	0.0	39.8	1,409.6			
R6	2,591.6	2,032.3	592.7	284.3	18.4	7.3	5,526.7	66.1	3.5	69.6	9,362.2	152.8	81.9	76.1	158.0	208.7	0.0	519.6	15,478.1			
R7	315.1	192.2	181.1	22.8	0.6	0.2	712.0	0.0	5.2	5.2	1,206.2	14.3	7.8	8.8	16.5	16.3	0.0	47.1	1,970.6			
R8	2,750.3	1,215.9	705.9	344.6	2.3	1.1	5,020.1	6.5	5.6	12.1	8,504.0	136.8	50.5	56.5	107.0	72.7	0.0	316.5	13,852.7			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	96,996.6	48,234.2	34,453.7	12,157.3	91.6	35.6	193,969.0	546.1	227.6	773.7	328,593.6	8,462.4	2,102.0	1,931.8	4,033.8	7,929.6	0.0	20,425.8	543,752.2			

表式-3		被害額（事業実施前H15） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)		
地区 ブロック	家屋		家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対応費			事業所における応急対策費用	その他の関係被害	小計	合計	備考	
				事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計						
	償却	在庫	償却	在庫																		
L1	710.4	264.7		43.0	12.8	4.9	1.9	1,037.7	60.2	42.3	102.5	1,757.9	16.3	11.3	13.9	25.1	24.1	0.0	65.5	2,963.7		
L1-1	19.0	3.4		1.8	0.8	0.0	0.0	24.9	2.1	0.0	2.1	42.3	0.8	0.5	1.0	1.5	0.9	0.0	3.2	72.5		
L1-2	21.0	10.4		0.4	0.0	0.0	0.0	31.8	0.0	0.0	0.0	53.9	0.1	0.5	0.9	1.4	0.4	0.0	2.0	87.7		
L1-3	172.6	61.9		12.8	4.1	0.6	0.2	252.2	5.5	0.0	5.5	427.3	6.0	2.7	3.8	6.5	6.1	0.0	18.6	703.7		
L1-4	112.9	52.5	3.2	1.8	1.0	0.4	0.4	171.7	2.3	1.5	3.8	290.9	1.3	2.2	2.6	4.8	2.3	0.0	8.4	474.8		
L1-5	381.7	90.9		105.0	18.5	1.5	0.6	598.2	17.6	0.8	18.4	1,013.4	24.0	3.6	3.7	7.3	20.8	0.0	52.0	1,682.0		
L1-6	646.0	395.8		136.4	97.6	4.3	1.6	1,281.7	12.0	0.6	12.6	2,171.2	41.8	16.4	14.9	31.3	57.7	0.0	130.8	3,596.3		
L1-7	91.0	79.3		32.0	9.0	0.7	0.3	212.4	16.0	0.1	16.1	359.7	9.7	3.0	4.1	7.1	9.9	0.0	26.8	615.0		
L1-8	230.5	106.1		15.6	12.2	1.6	0.7	366.7	4.6	0.3	4.8	621.2	6.1	4.4	5.4	9.7	11.3	0.0	27.2	1,019.9		
L1-9	163.2	37.7		7.1	10.3	0.8	0.3	219.5	9.1	1.7	10.8	371.9	3.8	1.6	1.7	3.3	3.1	0.0	10.2	612.4		
L1-10	50.8	45.5		13.8	8.6	0.2	0.1	118.9	19.5	0.9	20.4	201.4	4.5	2.1	2.4	4.5	3.7	0.0	12.8	353.4		
L1-11	1,271.9	457.4		223.7	117.9	1.7	0.7	2,073.2	12.6	10.7	23.3	3,512.1	66.9	18.9	22.8	41.6	103.9	0.0	212.4	5,821.1		
L1-12	100.9	26.5		1.6	0.7	0.2	0.1	130.1	3.1	0.0	3.1	220.3	0.7	1.5	2.8	4.3	1.9	0.0	6.9	360.4		
L2	566.6	241.5		34.7	28.9	2.4	1.0	875.2	18.9	0.0	18.9	1,482.7	14.2	9.8	9.7	19.5	8.8	0.0	42.5	2,419.3		
L3	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	139,484.7	56,248.2		42,930.1	15,468.8	45.3	15.6	254,192.8	21.3	4.6	25.9	430,602.5	13,537.3	2,574.3	1,770.1	4,344.4	10,900.1	0.0	28,781.8	713,602.9		
L5	22,173.2	8,122.1		3,888.9	2,192.2	12.7	4.5	36,373.7	13.0	4.2	17.1	61,617.0	1,106.2	329.3	258.0	587.3	717.1	0.0	2,410.6	100,418.5		
L6	16,580.5	8,115.5		1,594.5	718.0	32.6	12.8	27,054.0	100.0	57.5	157.5	45,829.4	435.3	320.8	310.6	631.3	438.3	0.0	1,504.9	74,545.8		
L7	12,042.2	4,819.5		2,335.1	1,055.2	10.2	3.9	20,266.1	35.2	10.0	45.1	34,330.8	637.4	207.0	252.4	459.4	295.2	0.0	1,392.1	56,034.1		
R1	974.6	362.4		24.1	20.2	8.6	3.2	1,393.1	102.2	65.4	167.6	2,360.0	9.0	15.1	17.2	32.3	21.5	0.0	62.9	3,953.6		
R1-1	107.3	72.2		20.6	18.1	0.1	0.1	218.3	11.0	3.7	14.7	369.8	10.3	2.6	3.4	6.0	7.3	0.0	23.6	626.3		
R1-2	155.9	194.8		5.8	2.0	4.4	1.9	364.6	10.8	1.2	12.0	617.7	2.0	7.8	8.7	16.4	1.6	0.0	20.0	1,014.3		
R1-3	128.4	109.0		3.3	4.1	2.4	0.9	248.1	7.2	0.0	7.2	420.2	1.4	4.4	3.9	8.2	4.8	0.0	14.5	689.9		
R1-4	12.8	2.9		0.0	0.1	0.0	0.1	15.8	2.1	0.0	2.1	26.7	0.0	0.1	0.2	0.3	0.0	0.0	0.3	44.9		
R1-5	544.9	154.3		24.2	9.9	1.7	0.7	735.6	9.1	1.1	10.2	1,246.1	7.2	6.8	7.6	14.4	17.2	0.0	38.7	2,030.5		
R1-6	257.8	39.7		1.0	0.8	1.0	0.4	300.8	7.9	2.9	10.8	509.5	0.5	1.8	2.5	4.3	1.3	0.0	6.1	827.1		
R2	43.0	5.0		1.2	0.0	0.1	0.0	49.4	0.1	0.0	0.1	83.6	0.3	0.3	0.4	0.7	0.2	0.0	1.2	134.3		
R3	3,542.1	1,900.2		162.0	107.8	15.4	5.6	5,733.1	38.1	18.1	56.1	9,711.8	50.3	77.2	67.6	144.7	99.7	0.0	294.7	15,795.7		
R4	278.8	136.6		5.9	0.3	2.0	0.8	424.3	9.8	11.0	20.8	718.8	1.0	5.6	5.8	11.4	2.6	0.0	15.0	1,179.0		
R5	792.5	253.4		57.5	21.8	3.8	1.5	1,130.4	27.7	6.4	34.1	1,914.9	32.4	10.1	9.8	19.9	16.3	0.0	68.6	3,147.9		
R6	4,216.1	3,071.5		742.2	406.7	29.1	10.4	8,476.0	85.6	7.8	93.5	14,358.4	221.0	119.7	96.7	216.4	302.3	0.0	739.6	23,667.4		
R7	655.3	390.3		341.1	49.0	1.2	0.4	1,437.3	0.0	5.4	5.4	2,434.9	27.6	15.5	14.0	29.5	33.1	0.0	90.2	3,967.8		
R8	6,203.3	2,755.3		1,153.7	664.9	5.5	2.0	10,784.7	7.4	5.9	13.4	18,269.2	259.1	106.5	88.1	194.6	157.7	0.0	611.4	29,678.6		
HR2	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	212,732.0	88,626.2		53,902.4	21,063.1	196.1	72.6	376,592.4	671.9	264.1	936.0	637,947.4	16,534.6	3,883.3	3,006.4	6,889.6	13,271.1	0.0	36,695.3	1,052,171.0		

[illegible]

記号 ブロック	被害額（現況H26）						水系名：由良川				河川名：由良川				流量規模：1/2				(百万円)					
	一般資産被害額						農作物被害額				家屋における 応急対策費用				事業所における 応急対策費用				小計		合計		備考	
	事業所資産		農漁家資産		小計		水稲		畑作物															
	償却	在庫	償却	在庫																				
L1	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.6	4.1	2.4	6.5	1.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8.2			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2			
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.8	8.6	10.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10.4			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.6	5.9	11.2	17.1	1.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	18.8			

表式-3	被害額（現況H26） 資産-10%						水害名：由良川			河川名：由良川			流量規模：1/10					(百万円)					
区画 ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	富害停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃活動対価		代替活動等			小計							
			償却	在庫	償却	在庫					償却	在庫											
L1	25.2	0.0	5.2	0.7	0.1	0.0	31.3	38.2	30.6	68.8	53.1	1.6	0.0	0.0	0.0	1.3	0.0	2.9	156.1				
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	22.5	7.9	1.4	1.2	0.1	0.0	33.0	4.5	0.0	4.5	55.9	0.6	0.3	0.3	0.7	1.2	0.0	2.4	95.7				
L1-4	1.8	0.3	0.0	0.0	0.0	0.0	2.1	0.6	0.4	1.0	3.6	0.0	0.1	0.1	0.1	0.0	0.0	0.2	6.8				
L1-5	14.7	1.4	6.1	0.5	0.0	0.0	22.6	12.3	0.4	12.7	38.3	1.8	0.1	0.1	0.1	0.2	0.8	0.0	2.7	76.4			
L1-6	34.9	18.0	8.6	4.7	0.2	0.1	66.3	11.0	0.0	11.0	112.3	2.4	0.8	1.3	2.1	2.6	0.0	7.1	196.8				
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-8	0.4	0.0	1.6	1.8	0.0	0.0	3.7	2.1	0.3	2.4	6.3	0.6	0.0	0.0	0.0	0.8	0.0	1.4	13.7				
L1-9	1.9	0.1	0.0	0.0	0.0	0.0	2.0	7.0	1.5	8.6	3.4	0.1	0.0	0.0	0.1	0.0	0.0	0.2	14.1				
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-11	49.8	10.2	14.7	6.3	0.1	0.0	81.2	11.2	10.1	21.4	137.5	4.1	0.5	0.6	1.0	7.1	0.0	12.2	252.2				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	532.7	237.3	4.4	6.1	4.5	1.8	796.8	35.6	32.1	67.7	1,332.8	2.2	10.2	16.3	26.4	3.3	0.0	31.9	2,219.3				
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1	17.0	3.2	1.0	0.8	0.0	0.0	22.1	77.5	51.4	128.9	37.4	0.3	0.2	0.3	0.5	0.4	0.0	1.1	189.4				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	0.3	0.6	0.0	0.0	0.0	0.0	0.9	4.6	0.3	4.9	1.5	0.0	0.1	0.2	0.3	0.0	0.0	0.3	7.6				
R1-3	26.6	21.6	0.7	0.8	0.5	0.2	50.5	6.2	0.0	6.2	85.5	0.3	0.9	0.8	1.7	1.0	0.0	2.9	145.1				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3				
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	19.0	16.0	0.9	0.0	0.2	0.1	36.3	7.8	7.7	15.5	61.5	0.2	0.7	0.9	1.6	0.3	0.0	2.1	115.4				
R5	28.2	9.1	2.8	0.9	0.1	0.0	41.1	22.7	5.4	28.1	69.7	2.4	0.5	0.8	1.2	0.8	0.0	4.4	143.3				
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	774.9	325.6	47.4	23.9	5.8	2.3	1,179.9	241.5	140.5	382.0	1,998.8	16.5	14.2	21.6	35.8	19.5	0.0	71.8	3,632.4				

記号 加圧 ブロック	被害額（現況26） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)		
	一般資産被害額						農作物被害額				家屋における 応急対策費用				事業所にお ける応急対 策費用				小計	合計	備考
	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木土 施設等被害額	富集停止損 失	清掃活動対 価		代替活動等	小計							
	償却	在庫	償却	在庫							小計	清掃活動対 価									
L1	48.3	1.6	8.5	1.6	0.2	0.1	60.3	46.5	37.3	83.7	102.2	3.1	0.2	0.4	0.6	2.9	0.0	6.6	252.8		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	26.4	8.6	1.7	1.3	0.1	0.0	38.0	4.8	0.0	4.8	64.4	0.8	0.4	0.5	0.9	1.3	0.0	2.9	110.0		
L1-4	11.6	4.9	0.2	0.2	0.1	0.0	16.9	1.4	1.0	2.4	28.7	0.1	0.2	0.4	0.6	0.2	0.0	0.9	48.9		
L1-5	94.0	10.8	39.6	4.8	0.2	0.1	149.6	15.7	0.6	16.4	253.4	8.2	0.6	0.9	1.5	5.7	0.0	15.4	434.7		
L1-6	115.3	72.1	30.2	16.3	0.7	0.3	234.9	13.6	0.7	14.3	397.9	7.9	3.0	3.9	6.8	9.2	0.0	23.9	671.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.0	0.0	5.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.0		
L1-8	1.0	0.1	2.7	3.9	0.0	0.0	7.7	2.8	0.3	3.1	13.0	1.0	0.0	0.0	0.0	1.7	0.0	2.7	26.5		
L1-9	8.4	1.6	0.2	0.1	0.1	0.0	10.3	8.1	1.6	9.7	17.5	0.2	0.1	0.1	0.1	0.1	0.0	0.4	37.9		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-11	113.2	24.2	33.1	19.4	0.2	0.1	190.3	12.1	10.8	23.0	322.4	9.0	0.9	1.0	1.9	21.7	0.0	32.7	568.3		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	19,457.6	9,691.8	8,877.4	2,397.4	8.9	3.7	40,436.7	18.7	4.4	23.1	68,499.7	2,397.0	441.9	654.1	1,095.9	1,576.7	0.0	5,069.7	114,029.2		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	2,809.9	844.5	231.0	97.0	8.7	3.5	3,994.6	79.5	43.8	123.4	6,766.8	74.5	38.2	63.9	102.0	45.1	0.0	221.5	11,196.3		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	56.0	14.9	2.5	2.2	0.3	0.1	76.1	87.5	58.8	146.2	128.8	0.8	0.7	1.0	1.7	1.0	0.0	3.4	354.5		
R1-1	2.5	0.2	0.3	0.1	0.0	0.0	3.1	1.6	0.1	1.8	5.3	0.3	0.0	0.1	0.1	0.1	0.0	0.5	10.6		
R1-2	5.0	10.7	0.0	0.0	0.4	0.2	16.3	5.2	1.1	6.3	27.5	0.0	0.5	0.8	1.3	0.0	0.0	1.3	51.4		
R1-3	48.4	38.1	1.0	1.3	0.9	0.3	90.0	6.6	0.0	6.6	152.5	0.5	1.5	1.4	2.9	1.7	0.0	5.1	254.2		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	63.9	37.4	2.1	0.1	0.5	0.2	104.2	9.1	10.1	19.3	176.6	0.4	1.7	2.2	3.9	0.8	0.0	5.1	305.2		
R5	60.3	22.4	7.7	2.7	0.2	0.1	93.4	23.6	6.0	29.7	158.1	6.6	1.0	1.5	2.5	2.1	0.0	11.3	292.4		
R6	650.5	551.9	168.9	55.8	5.9	2.5	1,435.4	45.2	0.6	45.9	2,431.6	53.7	23.6	34.9	58.5	52.7	0.0	164.9	4,077.7		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
RH2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	23,572.2	11,335.9	9,407.2	2,604.0	27.3	11.2	46,957.7	387.4	177.5	564.9	79,546.3	2,564.0	514.5	766.8	1,281.3	1,722.8	0.0	5,568.2	132,637.0		

表式-3	被害額（規正H26）				資産-10%				水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)				
近道 ブロック	一般資産被害額								農作物被害額				家屋における 応急対策費用												
	事業所資産				農漁業資産				小計	水稲	畑作物	小計	公共土木施設等被害額	営業停止損失	清掃労働対価			代替活動等	小計	事業所における 応急対策費用	その他の関係被害	小計	合計	備考	
	償却	在庫	償却	在庫	償却	在庫	償却	在庫							償却	在庫	償却								在庫
L1	460.1	119.6	42.1	11.7	3.1	1.2	637.7	61.0	42.5	103.5	1,080.3	15.4	6.0	9.6	15.6	17.6	0.0	48.7	1,870.3						
L1-1	20.0	3.6	1.9	0.8	0.0	0.0	26.4	2.1	0.0	2.1	44.7	0.9	0.6	1.1	1.6	0.9	0.0	3.4	76.7						
L1-2	13.6	5.4	0.2	0.0	0.0	0.0	19.2	0.0	0.0	0.0	32.6	0.1	0.4	0.7	1.0	0.3	0.0	1.4	53.2						
L1-3	200.1	76.4	15.1	5.2	0.7	0.3	297.9	5.7	0.0	5.7	504.6	6.6	3.0	4.3	7.3	7.2	0.0	21.2	829.3						
L1-4	105.5	49.8	2.9	1.7	0.9	0.4	161.0	2.0	1.6	3.6	272.8	1.2	2.1	2.3	4.4	2.2	0.0	7.8	445.3						
L1-5	390.4	92.1	108.7	18.9	1.6	0.6	612.3	18.1	0.8	18.9	1,037.2	24.6	3.6	3.8	7.4	21.4	0.0	53.4	1,721.8						
L1-6	582.4	361.6	130.3	91.0	3.9	1.5	1,170.7	15.6	0.8	16.4	1,983.1	38.4	14.9	14.0	28.9	53.6	0.0	120.8	3,291.0						
L1-7	81.1	72.2	29.6	8.3	0.6	0.3	192.0	15.4	0.1	15.4	325.3	9.3	2.8	4.0	6.8	9.5	0.0	25.5	558.3						
L1-8	163.3	67.4	13.1	10.8	1.1	0.5	256.0	5.1	0.4	5.4	433.7	5.4	3.1	4.2	7.2	9.1	0.0	21.7	716.7						
L1-9	142.6	31.9	6.8	9.8	0.7	0.3	192.0	9.1	1.7	10.8	325.3	3.6	1.3	1.4	2.7	2.8	0.0	9.1	537.2						
L1-10	1.6	1.9	1.2	0.3	0.0	0.0	5.0	0.0	0.5	0.5	8.4	0.4	0.1	0.1	0.2	0.3	0.0	0.9	14.8						
L1-11	1,899.3	668.7	300.2	166.8	2.4	1.0	3,038.4	17.9	13.7	31.6	5,147.0	90.0	26.7	28.7	55.4	137.1	0.0	282.5	8,499.5						
L1-12	101.9	28.8	1.7	0.7	0.2	0.1	133.5	3.2	0.0	3.2	226.1	0.8	1.6	2.8	4.4	1.9	0.0	7.1	369.8						
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L4	139,434.6	56,243.5	42,929.6	15,468.6	45.3	15.6	254,137.1	21.3	4.6	25.9	430,508.3	13,537.2	2,574.0	1,770.0	4,344.0	10,899.8	0.0	28,781.0	713,452.3						
L5	22,055.7	8,055.6	3,863.7	2,185.9	12.7	4.5	36,178.0	12.8	4.1	16.9	61,285.5	1,102.4	327.1	257.2	584.3	714.2	0.0	2,400.9	99,881.4						
L6	16,305.4	8,020.4	1,578.5	709.0	32.7	13.1	26,659.0	99.2	50.4	149.6	45,160.4	431.9	317.9	308.2	626.1	434.4	0.0	1,492.4	73,461.4						
L7	12,025.5	4,813.9	2,333.1	1,054.4	10.2	3.9	20,241.0	35.2	10.0	45.2	34,288.2	636.9	206.7	251.9	458.6	294.9	0.0	1,390.5	55,964.8						
R1	735.8	216.1	19.4	16.9	5.6	2.1	996.0	103.5	66.5	170.0	1,687.3	7.3	9.9	12.8	22.7	12.4	0.0	42.3	2,895.6						
R1-1	127.9	85.5	25.7	24.9	0.2	0.1	264.3	14.1	5.3	19.4	447.7	12.0	3.4	3.9	7.2	9.5	0.0	28.8	760.2						
R1-2	225.7	235.5	9.3	3.5	5.1	2.2	481.2	14.4	1.2	15.6	815.2	2.9	9.9	10.0	19.9	2.7	0.0	25.6	1,337.7						
R1-3	128.4	109.0	3.3	4.1	2.4	0.9	248.1	7.2	0.0	7.2	420.2	1.4	4.4	3.9	8.2	4.8	0.0	14.5	689.9						
R1-4	7.9	0.6	0.0	0.0	0.0	0.0	8.6	2.1	0.0	2.1	14.5	0.0	0.0	0.1	0.1	0.0	0.0	0.1	25.2						
R1-5	375.6	102.5	15.6	5.8	1.2	0.5	501.2	9.1	1.2	10.3	849.0	4.0	4.3	5.1	9.4	9.7	0.0	23.2	1,383.7						
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R3	3,478.6	1,873.1	159.7	105.1	15.3	5.6	5,637.3	38.1	18.1	56.2	9,549.5	49.3	76.0	66.9	142.8	97.2	0.0	289.4	15,532.4						
R4	337.8	151.1	6.4	0.3	2.2	0.9	498.7	9.8	11.0	20.8	844.8	1.1	6.3	6.4	12.6	2.8	0.0	16.5	1,380.8						
R5	799.2	246.7	57.1	20.7	3.9	1.5	1,192.7	27.6	6.5	34.1	1,912.7	31.3	9.8	9.7	19.6	15.0	0.0	65.9	3,141.7						
R6	4,370.9	3,172.3	754.3	418.5	30.2	10.7	8,756.8	85.8	8.0	93.8	14,834.0	228.5	123.4	98.2	221.6	312.3	0.0	762.3	24,447.0						
R7	655.3	390.3	341.1	49.0	1.2	0.4	1,437.3	0.0	5.4	5.4	2,434.9	27.6	15.5	14.0	29.5	33.1	0.0	90.2	3,967.8						
R8	6,203.3	2,755.3	1,153.7	664.9	5.5	2.0	10,784.7	7.4	5.9	13.4	18,269.2	259.1	106.5	88.1	194.6	157.7	0.0	611.4	29,678.6						
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
合計	211,429.4	88,050.9	53,904.1	21,057.5	188.8	69.8	374,700.6	642.9	260.2	903.1	634,742.8	16,529.6	3,861.1	2,983.1	6,844.2	13,264.4	0.0	36,638.2	1,046,984.6						

左記 ブロック	被害額（緊急水防災整備H27） 資産-10%										水系名：由良川				河川名：由良川				流量規模：1/1		(百万円)							
	一般資産被害額										農作物被害額				家屋における 応急対策費用				事業所にお ける応急対 策費用		その他の間 接被害		小計		合計		備考	
	事業所資産		農漁家資産		小計	水稲	畑作物	小計																				
	家屋	家庭用品	償却	在庫					償却	在庫	公共土木施設等被害額	富集停止損失	清掃労働対価	代経活動等	小計													
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

[illegible]

様式－3		被害額（緊急水防災整備H27） 資産-10%						水系名：由良川				河川名：由良川			流量規模：1/3				(百万円)				
近基 ブロック	家屋	家庭用品	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稻	畑作物	小計	家屋における 応急対策費用												
			償却	在庫	償却	在庫					清掃労働対 価	代替活動等			小計								
L1	5.2	0.0	0.7	0.1	0.0	0.0	6.0	12.9	10.8	23.7	10.2	0.4	0.0	0.0	0.0	0.2	0.0	0.6	40.4				
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.4	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6				
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	0.1	0.0	0.0	0.0	0.0	0.0	0.1	0.8	0.8	1.5	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.9				
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1	1.0	0.3	0.0	0.0	0.0	0.0	1.4	31.7	22.4	54.1	2.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	57.8				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.2	0.0	2.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.2				
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	6.4	0.3	0.7	0.1	0.0	0.0	7.5	47.7	34.3	82.1	12.8	0.4	0.0	0.0	0.0	0.2	0.0	0.6	102.9				

近基 ブロック	被害額（緊急水防災整備H27） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/5					(百万円)		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
			償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計					
L1	13.1	0.0	2.3	0.3	0.1	0.0	15.9	31.6	23.0	54.6	26.9	0.9	0.0	0.0	0.0	0.6	0.0	1.5	98.9	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	12.1	5.0	0.8	0.5	0.0	0.0	18.5	4.0	0.0	4.0	31.3	0.4	0.2	0.2	0.4	0.5	0.0	1.3	55.1	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.0	1.2	5.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.2	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	22.2	10.4	0.2	0.4	0.0	0.0	33.2	16.3	18.6	34.9	56.3	0.1	0.5	0.7	1.2	0.4	0.0	1.7	126.1	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	2.7	0.5	0.2	0.1	0.0	0.0	3.6	48.0	34.2	82.2	6.1	0.1	0.0	0.0	0.0	0.1	0.0	0.2	92.0	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6	0.0	2.6	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.8	
R1-3	18.8	16.1	0.6	0.6	0.3	0.2	36.6	5.9	0.0	5.9	62.0	0.2	0.7	0.7	1.4	0.7	0.0	2.3	106.8	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	8.3	5.3	0.3	0.0	0.1	0.0	14.1	6.5	6.1	12.6	23.6	0.1	0.3	0.4	0.7	0.1	0.0	0.9	51.4	
R5	2.9	1.0	0.1	0.1	0.0	0.0	4.1	0.9	2.6	3.5	7.0	0.1	0.0	0.1	0.1	0.1	0.0	0.2	14.9	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	80.2	38.4	4.6	2.0	0.5	0.2	126.1	119.9	85.6	205.5	213.6	1.8	1.6	2.2	3.8	2.5	0.0	8.0	553.2	

様式-3			被害額（緊急水防災整備H27） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/10				(百万円)	
地区 ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考		
			事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対 価	代替活動等	小計							
			償却	在庫	償却	在庫																
L1	25.2	0.0	5.2	0.7	0.1	0.0	31.3	38.6	30.7	69.2	53.1	1.6	0.0	0.0	0.0	1.3	0.0	2.9	156.6			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	23.1	7.9	1.4	1.2	0.1	0.0	33.7	4.4	0.0	4.4	57.1	0.6	0.3	0.3	0.7	1.2	0.0	2.5	97.8			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-9	1.9	0.1	0.0	0.0	0.0	0.0	2.0	7.0	1.5	8.6	3.4	0.1	0.0	0.0	0.1	0.0	0.0	0.2	14.1			
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	540.8	239.8	4.4	6.2	4.6	1.8	797.5	35.7	32.1	67.9	1,350.9	2.2	10.3	16.4	26.7	3.3	0.0	32.2	2,248.5			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	11.7	1.6	0.9	0.8	0.0	0.0	15.0	77.9	51.8	129.7	25.5	0.3	0.1	0.1	0.2	0.3	0.0	0.7	170.9			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	0.3	0.6	0.0	0.0	0.0	0.0	0.9	4.6	0.3	4.9	1.5	0.0	0.1	0.2	0.3	0.0	0.0	0.3	7.6			
R1-3	26.6	21.6	0.7	0.8	0.5	0.2	50.5	6.2	0.0	6.2	85.5	0.3	0.9	0.8	1.7	1.0	0.0	2.9	145.1			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	19.0	16.0	0.9	0.0	0.2	0.1	36.3	7.7	7.6	15.4	61.5	0.2	0.7	0.9	1.6	0.3	0.0	2.1	115.2			
R5	27.7	8.6	2.8	0.9	0.1	0.0	40.1	22.7	5.4	28.1	67.9	2.4	0.5	0.7	1.2	0.8	0.0	4.4	140.5			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	676.3	296.3	16.4	10.6	5.5	2.2	1,007.3	205.0	129.4	334.4	1,706.4	7.5	12.8	19.5	32.4	8.3	0.0	48.1	3,096.2			

様式-3			被害額（緊急水防災整備H27） 資産-10%							水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)	
地区 ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間接被害	小計	合計	備考			
			事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計								
			償却	在庫	償却	在庫																	
L1	47.6	1.2	8.6	1.6	0.2	0.1	59.3	47.0	37.6	84.6	100.5	3.1	0.2	0.3	0.5	3.0	0.0	6.5	250.9				
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	46.2	15.5	2.2	1.9	0.1	0.0	65.9	4.9	0.0	4.9	111.7	1.3	0.7	0.7	1.3	2.2	0.0	4.8	187.4				
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.9	0.0	5.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.0				
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-9	10.2	1.6	0.3	0.1	0.1	0.0	12.2	8.2	1.6	9.7	20.7	0.2	0.1	0.1	0.1	0.1	0.0	0.4	43.1				
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	19,457.6	9,691.8	8,877.4	2,397.4	8.9	3.7	40,436.7	18.6	4.4	23.0	68,499.7	2,397.0	441.9	654.1	1,095.9	1,576.7	0.0	5,069.7	114,029.1				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	2,811.4	845.1	231.0	97.0	8.7	3.5	3,996.6	79.6	43.9	123.5	6,770.2	74.5	38.2	64.0	102.3	45.1	0.0	221.8	11,112.1				
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1	37.7	4.3	2.3	2.1	0.1	0.0	46.7	87.8	59.4	147.3	79.0	0.7	0.2	0.3	0.5	0.8	0.0	1.9	274.9				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	5.8	10.7	0.0	0.0	0.4	0.2	17.1	5.3	1.1	6.4	29.0	0.0	0.5	0.8	1.3	0.0	0.0	1.3	53.8				
R1-3	48.4	38.1	1.0	1.3	0.9	0.3	90.0	6.6	0.0	6.6	152.5	0.5	1.5	1.4	2.9	1.7	0.0	5.1	254.2				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	63.9	37.4	2.1	0.1	0.5	0.2	104.2	9.1	10.1	19.2	176.6	0.4	1.7	2.2	3.9	0.8	0.0	5.1	305.1				
R5	60.3	22.4	7.7	2.7	0.2	0.1	93.4	23.6	6.0	29.6	158.1	6.6	1.0	1.5	2.5	2.1	0.0	11.3	292.3				
R6	650.5	551.9	168.9	55.8	5.9	2.5	1,435.4	45.2	0.6	45.9	2,431.6	53.7	23.6	34.9	58.5	52.7	0.0	164.9	4,077.7				
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	23,239.6	11,220.0	9,301.5	2,559.9	25.9	10.6	46,357.5	342.0	164.8	506.8	78,529.7	2,537.8	509.6	760.2	1,269.8	1,685.1	0.0	5,492.7	130,886.7				

形式 - 3	被害額（緊急水防災整備H27） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)				
避難 ブロック	一般資産被害額										農作物被害額				家屋における 応急対策費用				事業所にお ける応急対 策費用	事業所にお ける間 接被害	小計	合計	備考
	事業所資産		農産家資産		小計	水稲	畑作物	小計	公共土木施設等被害額	富害等損失	清掃労働対 価		代修活動等	小計									
	償却	在庫	償却	在庫							小計	小計											
L1	454.8	108.7	42.9	12.1	3.1	1.2	622.7	61.2	42.7	103.9	1,054.9	15.7	5.6	9.4	15.0	17.9	0.0	48.6	1,830.1				
L1-1	28.5	5.0	2.7	1.2	0.0	0.0	37.4	2.1	0.0	2.1	63.4	1.2	0.8	1.5	2.3	1.3	0.0	4.8	107.7				
L1-2	19.3	10.0	0.4	0.0	0.0	0.0	29.7	0.0	0.0	0.0	50.3	0.1	0.5	0.8	1.3	0.4	0.0	1.8	81.8				
L1-3	207.6	79.9	15.9	5.2	0.7	0.3	309.6	5.7	0.0	5.7	524.5	6.8	3.2	4.4	7.6	7.5	0.0	21.9	861.6				
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-5	507.0	120.1	126.5	22.9	1.9	0.7	779.1	19.5	1.1	20.7	1,319.8	32.4	4.5	4.0	8.5	26.7	0.0	67.5	2,187.2				
L1-6	724.4	452.1	148.2	108.0	4.9	1.8	1,439.5	17.9	0.8	18.7	2,438.5	47.9	18.3	16.6	34.9	67.1	0.0	149.8	4,046.4				
L1-7	91.0	79.3	32.0	9.0	0.7	0.3	212.4	16.0	0.1	16.1	359.7	9.7	3.0	4.1	7.1	9.9	0.0	26.8	615.0				
L1-8	188.0	84.7	14.1	11.1	1.3	0.6	299.7	8.6	0.4	9.0	507.7	5.6	3.7	4.8	8.5	9.7	0.0	23.8	840.2				
L1-9	142.6	31.9	6.8	9.8	0.7	0.3	192.0	9.1	1.7	10.8	325.3	3.6	1.3	1.4	2.7	2.8	0.0	9.1	537.2				
L1-10	1.6	1.9	1.2	0.3	0.0	0.0	5.0	0.0	0.5	0.5	8.4	0.4	0.1	0.1	0.2	0.3	0.0	0.9	14.8				
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-12	101.9	28.8	1.7	0.7	0.2	0.1	133.5	3.2	0.0	3.2	226.1	0.8	1.6	2.8	4.4	1.9	0.0	7.1	369.8				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	139,441.3	56,244.8	42,932.0	15,469.6	45.3	15.6	254,148.6	21.3	4.6	25.9	430,527.7	13,538.7	2,574.2	1,770.4	4,344.6	10,900.4	0.0	28,783.7	713,485.8				
L5	22,055.7	8,055.6	3,863.7	2,185.9	12.7	4.5	36,178.0	12.9	4.1	17.0	61,285.5	1,102.4	327.1	257.2	584.3	714.2	0.0	2,400.9	99,881.5				
L6	16,305.4	8,021.4	1,578.6	709.0	32.7	13.1	26,660.1	99.0	50.3	149.4	45,162.2	431.9	317.9	308.2	626.1	434.5	0.0	1,492.5	73,464.1				
L7	12,025.5	4,813.9	2,333.1	1,054.4	10.2	3.9	20,241.0	35.2	9.9	45.2	34,288.2	636.9	206.7	251.9	458.6	294.9	0.0	1,390.5	55,964.8				
R1	640.7	150.5	19.1	16.2	4.3	1.6	832.4	103.6	66.5	170.1	1,410.2	6.9	7.8	11.8	19.6	11.4	0.0	38.0	2,450.7				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	240.4	272.9	9.5	3.7	5.6	2.3	534.5	14.7	1.2	15.9	905.5	3.1	11.1	10.5	21.6	2.9	0.0	27.7	1,483.6				
R1-3	128.4	109.0	3.3	4.1	2.4	0.9	248.1	7.2	0.0	7.2	420.2	1.4	4.4	3.9	8.2	4.8	0.0	14.5	690.0				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	420.7	114.6	16.5	6.4	1.4	0.5	560.1	9.7	1.4	11.1	948.8	4.2	4.8	5.3	10.1	10.7	0.0	25.0	1,545.0				
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	3,489.9	1,887.6	160.5	106.6	15.3	5.6	5,665.4	38.1	18.1	56.2	9,597.2	49.9	76.4	67.0	143.4	98.8	0.0	292.0	15,610.9				
R4	337.8	151.1	6.4	0.3	2.2	0.9	498.7	9.9	11.0	20.9	844.8	1.1	6.3	6.4	12.6	2.8	0.0	16.5	1,380.9				
R5	799.2	246.7	57.1	20.7	3.9	1.5	1,129.1	27.6	6.5	34.0	1,912.7	31.3	9.8	9.7	19.6	15.0	0.0	65.9	3,141.6				
R6	4,370.9	3,172.3	754.3	418.5	30.2	10.7	8,756.8	85.7	8.0	93.7	14,834.0	228.5	123.4	98.2	221.6	312.3	0.0	762.3	24,446.9				
R7	655.3	390.3	341.1	49.0	1.2	0.4	1,437.3	0.0	5.4	5.4	2,434.9	27.6	15.5	14.0	29.5	33.1	0.0	90.2	3,967.8				
R8	6,203.3	2,755.3	1,153.7	664.9	5.5	2.0	10,784.7	7.4	5.9	13.4	18,269.2	259.1	106.5	88.1	194.6	157.7	0.0	611.4	29,678.6				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	209,581.3	87,388.6	53,621.1	20,889.5	186.3	68.6	371,735.4	615.7	240.2	855.9	629,719.8	16,447.2	3,834.3	2,952.6	6,787.0	13,138.8	0.0	36,373.0	1,038,684.1				

被褥額（当面整備H32）			資産-10%				水系名：由良川				河川名：由良川				流量規模：1/3				(百万円)		
左記 ブロック	一般資産被褥額						農作物被褥額				家屋における 応急対策費用				事業所にお ける応急対 策費用				小計	合計	備考
	家庭		家庭用品		事業所資産		農漁家資産		小計	水稲	畑作物	小計	公共土木施設等被褥額	富害停止損失	家屋における 応急対策費用		事業所における 応急対策費用	その他の間 接被害			
	償却	在庫	償却	在庫	償却	在庫	償却	在庫							清掃労働対 価	代修活動等					
L1	5.2	0.0	0.7	0.1	0.0	0.0	6.0	12.9	10.8	23.7	10.2	0.4	0.0	0.0	0.0	0.2	0.0	0.6	40.4		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.5	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.7	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	1.0	0.3	0.0	0.0	0.0	0.0	1.4	28.4	21.9	50.3	2.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	54.0	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.1	0.0	2.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.1	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	6.2	0.3	0.7	0.1	0.0	0.0	7.4	43.6	33.1	76.7	12.5	0.4	0.0	0.0	0.0	0.2	0.0	0.6	97.2		

[illegible]

形式-3	被害額（当面整備H32） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/10				(百万円)	
冠層 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	富集停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の関係被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁客資産		小計	水稲	畑作物	小計			清掃労働対価	代経活動等	小計					
			償却	在庫	償却	在庫														
L1	26.5	0.0	5.3	0.7	0.1	0.0	32.7	39.5	32.1	71.6	55.5	1.6	0.0	0.0	0.0	1.4	0.0	3.0	162.8	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	23.1	7.9	1.4	1.2	0.1	0.0	33.7	4.6	0.0	4.6	57.1	0.6	0.3	0.3	0.7	1.2	0.0	2.5	97.9	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.9	0.2	0.0	0.0	0.0	0.0	1.1	2.7	1.0	3.7	1.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.8	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	10.7	0.9	1.1	0.7	0.0	0.0	13.5	82.1	53.8	135.8	23.0	0.3	0.0	0.0	0.1	0.2	0.0	0.6	172.9	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.3	0.6	0.0	0.0	0.0	0.0	0.9	4.7	0.3	5.0	1.5	0.0	0.1	0.2	0.3	0.0	0.0	0.3	7.7	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	61.6	9.7	7.8	2.7	0.2	0.1	82.0	133.5	87.1	220.6	139.0	2.5	0.5	0.6	1.0	2.8	0.0	6.3	448.0	

形式-3 近港 ブロック	被害額（当面整備H32） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)			
	家屋		家庭用品		一般資産被害額		農産物被害額		小計	水稲	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の関係被害	小計	合計	備考
					償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計					
	償却	在庫	償却	在庫																		
L1	50.2	1.1	8.5	1.6	0.2	0.1	61.7	48.5	38.6	87.1	104.5	3.0	0.1	0.3	0.4	3.0	0.0	6.4	259.6			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	47.3	15.7	2.3	1.9	0.1	0.0	67.4	5.0	0.0	5.0	114.2	1.3	0.7	0.7	1.4	2.3	0.0	5.0	191.7			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	16,811.7	8,029.2	7,414.4	1,942.1	7.7	3.2	34,208.3	20.1	4.3	24.4	57,948.8	2,120.4	371.6	590.5	962.1	1,318.8	0.0	4,401.4	96,582.9			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	2,596.7	731.6	214.4	91.6	7.9	3.1	3,645.4	74.9	37.2	112.1	6,175.2	72.1	34.0	58.1	92.1	42.4	0.0	206.6	10,139.3			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	35.4	1.3	1.7	1.3	0.2	0.1	40.0	89.9	61.4	151.3	67.7	0.4	0.1	0.0	0.1	0.4	0.0	0.9	259.9			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	6.6	11.3	0.0	0.0	0.4	0.2	18.4	5.4	1.1	6.6	31.1	0.0	0.6	0.9	1.5	0.0	0.0	1.5	57.6			
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R6	140.6	73.3	12.9	4.9	0.5	0.2	232.4	0.0	0.0	0.0	393.8	2.7	3.0	4.4	7.4	1.6	0.0	11.6	637.8			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	19,686.6	8,863.4	7,654.3	2,043.4	17.1	6.8	38,273.5	243.8	142.6	386.4	64,835.4	2,200.0	410.1	654.9	1,065.0	1,368.4	0.0	4,633.5	108,128.8			

様式～3		被害額（当面整備H32） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)	
沿道 ブロック	家屋		一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対応費			事業所における 応急対応費	その他の関係被害	小計	合計	備考	
			事業所資産		農漁家資産		水稲	畑作物	小計	清掃労働対償			代替活動等	小計							
	償却	在庫	償却	在庫	小計																
L1	143.6	7.9	16.7	4.8	0.7	0.3	174.0	57.3	42.3	99.6	294.7	6.0	0.4	0.7	1.1	7.8	0.0	14.8	583.1		
L1-1	5.6	1.0	0.5	0.2	0.0	0.0	7.3	0.1	0.0	0.1	12.3	0.2	0.2	0.3	0.4	0.2	0.0	0.9	20.6		
L1-2	2.0	0.4	0.0	0.0	0.0	0.0	2.5	0.0	0.0	0.0	4.2	0.0	0.1	0.1	0.2	0.1	0.0	0.3	6.9		
L1-3	90.1	29.5	6.2	2.8	0.3	0.1	128.9	5.4	0.0	5.4	218.4	3.4	1.4	2.0	3.5	3.9	0.0	10.8	363.6		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.1	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2		
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	56,507.6	28,466.8	25,165.3	8,216.9	22.2	8.8	118,387.6	20.8	4.5	25.3	200,548.7	5,895.0	1,283.5	1,232.5	2,516.0	5,482.7	0.0	13,893.7	332,855.3		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	9,062.4	4,235.1	972.9	417.2	17.9	7.0	14,712.5	82.1	37.7	119.8	24,923.0	277.4	175.7	198.6	374.3	256.2	0.0	908.0	40,663.3		
L7	8,999.7	3,049.4	1,616.3	700.4	9.4	3.5	14,378.8	27.6	7.8	35.4	24,357.6	435.7	130.2	155.8	286.0	230.5	0.0	952.2	39,724.0		
R1	131.4	3.4	5.5	4.3	1.0	0.4	145.9	97.2	65.2	162.4	247.2	1.6	0.2	0.2	0.3	1.4	0.0	3.3	558.8		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	18.9	52.1	0.0	0.0	1.6	0.7	73.3	5.9	1.2	7.1	124.2	0.0	2.0	2.6	4.6	0.0	0.0	4.6	209.2		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	587.7	191.5	52.4	20.2	3.0	1.1	855.9	37.6	8.3	45.9	1,449.8	30.3	7.6	8.1	15.7	13.7	0.0	59.7	2,411.3		
R6	2,666.4	2,071.6	599.1	289.0	18.7	7.4	5,652.3	67.9	3.6	71.5	9,575.0	154.5	83.4	77.1	160.5	211.7	0.0	526.7	15,825.4		
R7	315.1	192.2	181.1	22.8	0.6	0.2	712.0	0.0	5.2	5.2	1,206.2	14.3	7.8	8.8	16.5	16.3	0.0	47.1	1,970.6		
R8	2,750.3	1,215.9	705.9	344.6	2.3	1.1	5,020.1	6.5	5.6	12.1	8,504.0	136.8	50.5	56.5	107.0	72.7	0.0	316.5	13,852.7		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	0.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0		
合計	81,281.0	39,516.8	29,321.9	10,023.3	77.6	30.6	160,251.1	409.4	181.4	590.8	271,465.5	6,955.1	1,742.9	1,743.3	3,486.1	6,297.4	0.0	16,738.6	449,046.1		

様式-3			被害額（当面整備H32） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)			
沿道 ブロック	家屋		家庭用品		一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の関係被害	小計	合計	備考
					事業所資産			農漁家資産			水稲	畑作物	小計	清掃労働対償			代替活動等	小計						
	償却	在庫	償却	在庫	小計																			
L1	469.6	97.0	31.4	10.2	3.2	1.2	612.7	62.0	42.7	104.6	1,037.9	12.7	5.0	8.7	13.8	17.8	0.0	44.3	1,799.5					
L1-1	19.0	3.4	1.8	0.8	0.0	0.0	24.9	2.1	0.0	2.1	42.3	0.8	0.5	1.0	1.5	0.9	0.0	3.2	72.5					
L1-2	21.0	10.4	0.4	0.0	0.0	0.0	31.8	0.0	0.0	0.0	53.9	0.1	0.5	0.9	1.4	0.4	0.0	2.0	87.7					
L1-3	223.4	88.9	18.0	5.3	0.8	0.3	336.8	5.6	0.0	5.6	570.5	7.2	3.7	4.7	8.4	8.1	0.0	23.7	936.6					
L1-4	133.0	69.0	3.5	2.1	1.1	0.5	209.3	2.6	1.7	4.3	354.5	1.6	2.7	2.9	5.7	2.7	0.0	10.0	578.1					
L1-5	507.0	120.1	126.5	22.9	1.9	0.7	779.1	19.6	1.1	20.8	1,319.8	32.4	4.5	4.0	8.5	26.7	0.0	67.5	2,187.2					
L1-6	812.8	523.9	162.2	119.7	5.6	2.1	1,626.3	18.9	0.9	19.8	2,755.0	52.9	20.7	18.6	39.3	72.3	0.0	164.4	4,565.5					
L1-7	163.5	140.6	50.4	16.7	1.2	0.5	372.9	16.7	0.1	16.8	631.7	14.9	5.7	6.0	11.7	18.2	0.0	44.7	1,066.2					
L1-8	204.1	92.4	14.7	11.4	1.5	0.6	324.6	8.6	0.4	9.0	549.9	5.7	3.9	5.0	8.9	10.1	0.0	24.8	908.4					
L1-9	161.9	36.1	6.9	10.0	0.8	0.3	216.0	16.2	2.8	19.0	366.0	3.7	1.5	1.7	3.2	3.1	0.0	10.0	611.0					
L1-10	1.6	2.3	1.3	0.3	0.0	0.0	5.6	0.0	0.5	0.5	9.4	0.4	0.1	0.1	0.2	0.4	0.0	1.0	16.5					
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L4	124,839.9	53,165.7	40,396.4	14,600.3	41.8	14.5	233,058.5	20.9	4.6	25.5	394,801.1	12,128.1	2,390.1	1,652.9	4,043.1	10,497.0	0.0	26,668.1	654,553.2					
L5	16,212.9	5,919.3	3,044.0	1,561.8	9.6	3.6	26,751.1	16.0	5.0	21.0	45,316.3	811.7	242.6	217.5	460.1	582.2	0.0	1,854.0	73,942.4					
L6	13,886.0	6,700.0	1,427.7	679.5	25.3	9.6	22,708.1	90.6	42.9	133.5	38,467.5	418.8	265.9	254.2	520.2	418.3	0.0	1,357.3	62,666.4					
L7	12,013.0	4,807.4	2,331.3	1,053.6	10.2	3.9	20,219.4	35.3	10.0	45.2	34,251.7	636.5	206.6	251.6	458.2	294.5	0.0	1,389.3	55,905.5					
R1	499.1	70.2	15.3	12.8	3.5	1.3	602.3	105.3	66.8	172.1	1,020.2	5.6	4.8	8.7	13.5	8.1	0.0	27.1	1,821.7					
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-2	249.5	276.5	9.8	3.9	5.7	2.3	547.7	14.8	1.2	15.9	927.7	3.2	11.4	11.0	22.4	3.0	0.0	28.6	1,520.0					
R1-3	139.1	119.6	3.4	4.4	2.7	1.0	270.1	8.4	0.0	8.4	457.6	1.5	4.7	4.0	8.7	5.2	0.0	15.4	751.5					
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-5	453.9	123.0	19.0	7.4	1.5	0.6	605.3	9.7	1.4	11.1	1,025.5	5.0	5.2	6.0	11.2	12.4	0.0	28.6	1,670.5					
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R4	1,033.7	350.3	13.2	0.9	5.5	2.1	1,405.7	13.4	6.9	20.3	2,381.3	2.5	14.1	12.7	26.9	6.4	0.0	35.7	3,843.0					
R5	955.3	311.4	72.0	26.5	4.5	1.7	1,371.4	38.0	8.3	46.3	2,323.1	46.4	12.2	11.6	23.8	20.0	0.0	90.2	3,831.0					
R6	4,318.5	3,136.5	748.0	412.7	29.7	10.6	8,656.0	85.8	7.9	93.7	14,663.3	224.5	122.2	97.8	220.1	307.5	0.0	752.1	24,165.1					
R7	655.3	390.3	341.1	49.0	1.2	0.4	1,437.3	0.0	5.4	5.4	2,434.9	27.6	15.5	14.0	29.5	33.1	0.0	90.2	3,967.8					
R8	6,203.3	2,755.3	1,153.7	664.9	5.5	2.0	10,784.7	7.4	5.9	13.4	18,269.2	259.1	106.5	88.1	194.6	157.7	0.0	611.4	29,678.6					
HR2	29.0	12.4	12.5	2.6	0.1	0.0	56.7	3.0	0.0	3.0	96.0	1.7	0.7	1.2	1.9	1.6	0.0	5.2	160.8					
合計	184,185.5	79,321.9	50,004.5	19,279.8	162.9	59.7	333,014.3	601.0	216.6	817.6	564,126.1	14,704.7	3,451.4	2,685.1	6,136.5	12,507.6	0.0	33,348.8	931,306.8					

記号 ブロック	被害額（緊急対策整備H34） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)		
	一般資産被害額						農作物被害額				家屋における 応急対策費用				事業所における 応急対策費用				小計	合計	備考
	事業所資産		農漁家資産		小計	水稲	畑作物	小計	公共土木施設等被害額	富家停止損失	家屋における 応急対策費用		事業所における 応急対策費用	その他の間 接被害							
	償却	在庫	償却	在庫							清掃労働対 価	代修活動等									
L1	57.3	1.1	9.5	1.8	0.2	0.1	70.0	48.9	39.0	87.9	118.6	3.4	0.1	0.3	0.4	3.5	0.0	7.2	283.7		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	17,147.1	8,182.8	7,552.9	1,974.2	7.8	3.2	34,868.0	20.1	4.3	24.4	59,066.4	2,146.3	376.6	598.0	974.5	1,342.2	0.0	4,462.9	98,421.7		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	44.9	1.3	2.5	1.7	0.4	0.1	51.0	90.7	61.4	152.1	86.3	0.5	0.1	0.0	0.1	0.5	1.1	290.5			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	140.6	73.3	12.9	4.9	0.5	0.2	232.4	0.0	0.0	0.0	393.8	2.7	3.0	4.4	7.4	1.6	0.0	11.6	637.8		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	17,390.0	8,258.4	7,577.8	1,982.7	8.9	3.7	35,221.4	159.7	104.7	264.3	59,665.1	2,152.9	379.8	602.6	982.4	1,347.6	0.0	4,482.9	99,633.7		

様式-3			被害額（緊急対策整備H34） 資産-10%				水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)		
地区 ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考	
			事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対償	代替活動等	小計						
			償却	在庫	償却	在庫															
L1	158.1	10.4	16.9	4.8	0.8	0.3	191.4	57.8	42.3	100.1	324.2	6.2	0.4	0.8	1.2	7.9	0.0	15.3	631.0		
L1-1	5.6	1.0	0.5	0.2	0.0	0.0	7.3	0.1	0.0	0.0	0.1	12.3	0.2	0.2	0.3	0.4	0.2	0.0	0.9	20.6	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.5	0.0	0.0	0.0	0.0	0.0	0.5	0.2	0.0	0.2	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4		
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.1	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.4		
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	59,567.6	30,056.4	26,105.2	8,596.0	23.5	9.2	124,357.8	20.8	4.5	25.3	210,662.2	6,172.2	1,350.0	1,263.1	2,613.1	5,773.0	0.0	14,558.3	349,603.6		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	9,512.1	4,483.8	971.4	418.8	19.0	7.5	15,412.5	110.6	53.2	163.8	26,108.8	277.3	187.6	213.7	401.2	257.9	0.0	936.4	42,621.6		
L7	8,989.1	3,032.5	1,614.2	699.4	9.4	3.5	14,348.1	27.6	7.8	35.4	24,305.6	435.3	129.6	155.3	285.0	229.8	0.0	950.0	39,639.1		
R1	140.0	3.5	5.6	4.4	1.0	0.4	155.0	97.4	65.5	162.8	282.5	1.6	0.2	0.2	0.4	1.5	0.0	3.5	583.8		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	420.1	152.9	44.2	18.2	1.5	0.6	637.6	29.8	6.8	36.7	1,080.0	29.0	6.0	6.5	12.6	12.7	0.0	54.3	1,808.5		
R6	2,552.1	1,999.7	584.3	279.6	18.0	7.2	5,440.9	65.2	3.5	68.7	9,216.8	149.6	80.8	75.4	156.2	204.5	0.0	510.3	15,236.7		
R7	315.1	192.2	181.1	22.8	0.6	0.2	712.0	0.0	5.2	5.2	1,206.2	14.3	7.8	8.8	16.5	16.3	0.0	47.1	1,970.6		
R8	2,750.3	1,215.9	705.9	344.6	2.3	1.1	5,020.1	6.5	5.6	12.1	8,504.0	136.8	50.5	56.5	107.0	72.7	0.0	316.5	13,852.7		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	0.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0		
合計	84,410.4	41,148.3	30,229.4	10,388.9	76.2	30.0	166,283.1	417.0	194.5	611.5	281,683.6	7,222.6	1,813.1	1,780.5	3,593.6	6,576.6	0.0	17,392.7	465,971.0		

表式-3		被害額（緊急対策整備H34） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)		
地区 ブロック	家屋		家庭用品		一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の関係被害	小計	合計	備考
					事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対償	代替活動等	小計					
	償却	在庫	償却	在庫	小計	水稻	畑作物	小計														
L1	556.5	140.3	36.4	11.6	3.7	1.4	749.9	62.8	42.7	105.5	1,270.4	14.3	6.3	10.9	17.1	20.9	0.0	52.3	2,178.0			
L1-1	19.6	3.5	1.8	0.8	0.0	0.0	25.7	2.1	0.0	2.1	43.5	0.8	0.5	1.0	1.6	0.9	0.0	3.3	74.7			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	302.3	122.2	24.7	8.6	1.0	0.4	459.2	7.5	0.0	7.5	777.9	9.1	4.9	5.7	10.5	12.1	0.0	31.7	1,276.3			
L1-4	151.9	70.4	4.9	2.3	1.2	0.5	231.2	2.7	1.7	4.4	391.6	2.1	2.8	3.1	5.9	3.3	0.0	11.3	638.5			
L1-5	539.0	130.1	131.3	24.6	2.0	0.8	827.8	19.8	1.1	20.9	1,402.2	33.5	5.1	4.4	9.5	28.1	0.0	71.1	2,322.0			
L1-6	883.2	557.1	171.1	128.3	6.3	2.3	1,748.2	18.9	0.9	19.8	2,961.5	56.6	22.0	19.5	41.5	76.5	0.0	174.6	4,904.0			
L1-7	172.9	147.3	52.1	17.6	1.3	0.5	391.7	16.8	0.1	16.9	663.6	15.5	6.0	6.1	12.1	18.5	0.0	46.2	1,118.4			
L1-8	247.9	111.9	16.2	12.5	1.8	0.7	391.0	8.6	0.4	9.0	662.3	6.2	4.6	5.5	10.1	12.0	0.0	28.3	1,090.6			
L1-9	196.0	50.0	9.1	14.4	1.0	0.4	270.9	16.3	2.8	19.1	458.9	5.1	2.1	2.1	4.2	4.2	0.0	13.5	762.4			
L1-10	50.8	44.3	12.6	8.0	0.2	0.1	116.0	21.2	1.0	22.2	196.5	3.8	1.9	2.1	4.0	3.6	0.0	11.4	346.0			
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	128,911.4	53,875.7	41,079.0	14,842.8	42.3	14.6	238,765.9	21.3	4.6	25.8	404,469.4	12,543.1	2,436.1	1,688.8	4,104.9	10,610.2	0.0	27,258.3	670,519.3			
L5	16,212.9	5,919.3	3,044.0	1,561.8	9.6	3.6	26,751.1	16.0	5.0	21.0	45,316.3	811.7	242.6	217.5	460.1	582.2	0.0	1,854.0	73,942.4			
L6	14,703.2	7,217.1	1,443.2	685.8	27.7	10.6	24,087.6	115.0	53.9	168.9	40,804.4	422.8	286.3	279.0	565.3	421.9	0.0	1,410.0	66,470.9			
L7	12,013.0	4,807.4	2,331.3	1,053.6	10.2	3.9	20,219.4	35.2	9.9	45.2	34,251.7	636.5	206.6	251.6	458.2	294.5	0.0	1,389.3	55,905.5			
R1	583.0	94.3	16.4	14.0	4.3	1.6	713.5	106.0	66.7	172.8	1,208.7	6.3	5.7	10.3	16.0	8.7	0.0	30.9	2,125.9			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	337.6	380.4	10.1	4.0	8.5	3.2	743.8	19.5	1.4	20.9	1,280.1	3.3	14.9	13.6	28.5	3.2	0.0	34.9	2,059.7			
R1-3	139.1	120.1	3.4	4.4	2.7	1.0	270.7	8.4	0.0	8.4	458.6	1.6	4.7	4.0	8.7	5.3	0.0	15.5	753.2			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	585.7	167.6	25.2	10.1	2.0	0.8	791.4	9.7	1.4	11.1	1,340.7	7.3	7.2	8.3	15.5	17.6	0.0	40.4	2,183.6			
R1-6	239.3	36.4	1.0	0.8	1.0	0.4	278.9	10.3	4.0	14.4	472.4	0.5	1.6	2.3	3.9	1.2	0.0	5.5	771.2			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	1,265.5	692.4	71.7	46.5	5.3	2.2	2,083.5	23.0	14.1	37.0	3,529.5	20.7	28.8	30.7	59.5	44.0	0.0	124.2	5,774.3			
R4	919.6	316.5	12.1	0.9	4.9	1.9	1,255.9	13.3	6.9	20.2	2,127.5	2.2	12.7	11.4	24.1	5.8	0.0	32.0	3,435.7			
R5	763.1	251.6	58.3	22.6	3.6	1.4	1,106.6	37.8	8.3	46.0	1,864.4	35.6	9.9	10.0	19.9	17.0	0.0	72.4	3,083.4			
R6	4,167.9	3,048.2	740.2	405.1	29.0	10.3	8,400.8	65.7	7.7	93.4	14,231.0	219.8	118.5	95.8	214.3	301.0	0.0	735.1	23,460.3			
R7	655.3	390.3	341.1	49.0	1.2	0.4	1,437.3	0.0	5.4	5.4	2,434.9	27.6	15.5	14.0	29.5	33.1	0.0	90.2	3,967.8			
R8	6,203.3	2,755.3	1,153.7	664.9	5.5	2.0	10,784.7	7.4	5.9	13.3	18,269.2	259.1	106.5	88.1	194.6	157.7	0.0	611.4	29,678.6			
RR2	29.0	12.4	12.5	2.6	0.1	0.0	56.7	3.0	0.0	3.0	66.0	1.7	0.7	1.2	1.9	1.6	0.0	5.2	160.8			
合計	190,849.0	81,462.3	50,803.5	19,597.5	176.2	64.9	342,953.4	688.5	245.9	934.4	580,963.0	15,146.7	3,554.3	2,766.9	6,321.2	12,685.0	0.0	34,152.9	959,003.6			

様式-3		被害額（事業実施後H56） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)	
地区 ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考	
			事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対償	代替活動等	小計						
			償却	在庫	償却	在庫															
L1	156.9	5.0	16.9	4.8	0.8	0.3	184.8	57.7	42.3	100.0	313.1	6.2	0.2	0.4	0.6	7.9	0.0	14.7	612.5		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.5	0.0	0.0	0.0	0.0	0.0	0.5	0.2	0.0	0.2	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4		
L1-9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-10	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.1	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.4		
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	139.9	3.5	5.6	4.4	1.0	0.4	154.8	97.5	65.4	162.9	282.3	1.6	0.2	0.2	0.4	1.5	0.0	3.5	583.6		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	766.0	264.8	172.4	67.0	0.7	0.3	1,271.1	2.4	1.4	3.8	2,153.3	46.9	13.0	23.0	36.0	15.8	0.0	98.6	3,526.9		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	1,063.2	273.4	194.9	76.2	2.5	1.0	1,611.3	157.7	109.2	266.9	2,729.6	54.7	13.4	23.6	37.0	25.2	0.0	116.9	4,724.8		

様式～3		被害額（事業実施後H56） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)	
地区 ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の関係被害	小計	合計	備考	
			事業所資産		農漁家資産			水稻	畑作物	小計			清掃労働対償	代替活動等	小計						
			償却	在庫	償却	在庫															
L1	545.5	125.6	36.3	11.6	3.6	1.4	723.9	63.0	42.7	105.6	1,226.4	14.3	5.9	10.4	16.3	20.8	0.0	51.4	2,107.3		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	302.3	122.2	24.7	8.6	1.0	0.4	459.2	7.5	0.0	7.5	777.9	9.1	4.9	5.7	10.5	12.1	0.0	31.7	1,276.3		
L1-4	151.9	70.4	4.9	2.3	1.2	0.5	231.2	2.7	1.7	4.4	391.6	2.1	2.8	3.1	5.9	3.3	0.0	11.3	638.5		
L1-5	539.0	130.1	131.3	24.6	2.0	0.8	827.8	19.8	1.1	20.9	1,402.2	33.5	5.1	4.4	9.5	28.1	0.0	71.1	2,322.1		
L1-6	874.2	557.1	170.9	127.7	6.3	2.3	1,738.4	18.9	0.9	19.8	2,944.8	55.8	22.0	19.5	41.5	76.4	0.0	173.8	4,876.8		
L1-7	172.4	147.0	51.8	17.5	1.3	0.5	390.6	16.8	0.1	16.9	661.7	15.5	6.0	6.1	12.1	18.5	0.0	46.1	1,115.3		
L1-8	247.9	111.9	16.2	12.5	1.8	0.7	391.0	8.6	0.4	9.0	662.3	6.2	4.6	5.5	10.1	12.0	0.0	28.3	1,090.6		
L1-9	196.0	50.0	9.1	14.4	1.0	0.4	270.9	16.3	2.8	19.1	458.9	5.1	2.1	2.1	4.2	4.2	0.0	13.5	762.4		
L1-10	50.8	44.3	12.6	8.0	0.2	0.1	116.0	21.2	1.0	22.2	196.5	3.8	1.9	2.1	4.0	3.6	0.0	11.4	346.0		
L1-11	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-12	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	101,176.3	46,933.3	36,708.2	13,027.8	35.8	12.7	197,894.0	20.3	4.5	24.8	335,232.4	9,955.2	2,069.3	1,543.0	3,612.3	9,425.5	0.0	22,993.1	556,144.2		
L5	16,212.9	5,919.3	3,044.0	1,561.8	9.6	3.6	26,751.1	16.0	5.0	21.0	45,316.3	811.7	242.6	217.5	460.1	582.2	0.0	1,854.0	73,942.4		
L6	5,634.9	2,067.0	451.8	194.7	15.3	6.5	8,370.4	114.7	56.0	170.6	14,179.4	122.0	82.9	114.0	196.9	93.5	0.0	412.4	23,132.8		
L7	8,257.3	3,152.1	1,393.4	615.0	6.1	2.4	13,426.4	34.9	9.9	44.9	22,744.4	440.6	143.6	184.4	328.0	186.1	0.0	954.7	37,170.4		
R1	583.0	94.3	16.4	14.0	4.3	1.6	713.5	106.2	66.7	172.9	1,208.7	6.3	5.7	10.3	16.0	8.7	0.0	30.9	2,126.0		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	337.6	380.4	10.1	4.0	8.5	3.2	743.8	19.5	1.4	20.9	1,260.1	3.3	14.9	13.6	28.5	3.2	0.0	34.9	2,059.7		
R1-3	139.1	120.1	3.4	4.4	2.7	1.0	270.7	8.4	0.0	8.4	458.6	1.6	4.7	4.0	8.7	5.3	0.0	15.5	753.2		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	581.8	165.4	25.1	10.1	2.0	0.8	785.1	9.7	1.4	11.1	1,330.0	7.3	7.1	8.2	15.4	17.6	0.0	40.2	2,166.4		
R1-6	239.3	36.4	1.0	0.8	1.0	0.4	278.9	10.3	4.0	14.4	472.4	0.5	1.6	2.3	3.9	1.2	0.0	5.5	771.2		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	1,179.9	664.8	69.4	45.1	5.0	2.0	1,966.3	22.8	14.1	36.8	3,330.8	20.2	27.5	29.8	57.3	42.8	0.0	120.2	5,454.1		
R4	979.2	340.4	13.0	0.9	5.3	2.0	1,340.9	13.4	6.9	20.3	2,271.6	2.4	13.6	12.5	26.1	6.2	0.0	34.6	3,667.4		
R5	617.7	220.3	63.1	25.5	2.6	1.0	930.2	33.4	7.1	40.5	1,575.7	43.8	8.7	9.0	17.6	17.4	0.0	78.8	2,625.2		
R6	2,366.4	1,768.2	556.0	242.9	15.6	6.6	4,955.7	89.0	6.5	95.5	8,395.0	136.0	72.2	74.4	146.5	176.9	0.0	459.4	13,905.7		
R7	330.5	205.4	193.4	24.4	0.6	0.2	754.5	0.0	5.2	5.2	1,278.1	14.9	8.2	9.1	17.2	17.1	0.0	49.3	2,087.2		
R8	4,330.0	1,912.6	946.3	499.5	3.7	1.5	7,693.7	7.1	6.0	13.1	13,033.1	193.8	76.4	74.3	150.6	111.8	0.0	456.3	21,196.1		
RR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	146,045.8	65,338.8	43,952.6	16,498.1	136.3	52.5	272,024.1	680.5	245.4	925.9	460,808.8	11,904.7	2,834.2	2,364.9	5,199.1	10,874.6	0.0	27,978.4	761,737.2		

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：事業実施前H15

事業名：事業全体 （事業実施前H15～現況H26） 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	33.0	20.9	12.1	6.1	0.500	3.1	3.1	
1/3	0.333	192.3	134.5	57.8	35.0	0.167	5.8	8.9	
1/5	0.200	884.0	676.8	207.2	132.5	0.133	17.6	26.5	
1/10	0.100	3,044.3	4,028.1	−983.8	−388.3	0.100	−38.8	−12.3	
1/20	0.050	143,515.9	146,755.8	−3,239.9	−2,111.9	0.050	−105.6	−117.9	
1/50	0.020	601,899.6	600,462.6	1,437.0	−901.4	0.030	−27.0	−144.9	
1/100 (1/144)	0.010	1,165,001.7	1,159,245.4	5,756.3	3,596.7	0.013	47.0	−97.9	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：現況H26

事業名：事業全体 （現況H26～緊急水防災整備H27） 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	20.9	20.9	0.0	0.0	0.500	0.0	0.0	
1/3	0.333	134.5	114.3	20.2	10.1	0.167	1.7	1.7	
1/5	0.200	676.8	613.8	63.0	41.6	0.133	5.5	7.2	
1/10	0.100	4,028.1	3,434.9	593.2	328.1	0.100	32.8	40.0	
1/20	0.050	146,755.8	144,819.4	1,936.4	1,264.8	0.050	63.2	103.2	
1/50	0.020	600,462.6	592,993.0	7,469.6	4,703.0	0.030	141.1	244.3	
1/100 (1/144)	0.010	1,159,245.4	1,150,052.0	9,193.4	8,331.5	0.013	108.8	353.1	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：緊急水防災整備H27

事業名：事業全体 （緊急水防災整備H27～当面整備H32） 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	20.9	20.6	0.3	0.1	0.500	0.1	0.1	
1/3	0.333	114.3	108.0	6.3	3.3	0.167	0.6	0.7	
1/5	0.200	613.8	296.4	317.4	161.9	0.133	21.5	22.2	
1/10	0.100	3,434.9	497.0	2,937.9	1,627.7	0.100	162.8	185.0	
1/20	0.050	144,819.4	119,628.3	25,191.1	14,064.5	0.050	703.2	888.2	
1/50	0.020	592,993.0	497,080.3	95,912.7	60,551.9	0.030	1,816.6	2,704.8	
1/100 (1/144)	0.010	1,150,052.0	1,031,079.9	118,972.1	107,442.4	0.013	1,402.7	4,107.5	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：当面整備H32

事業名：事業全体 （当面整備H32～緊急対策整備H34） 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	20.6	20.7	-0.1	0.0	0.500	0.0	0.0	
1/3	0.333	108.0	105.4	2.6	1.3	0.167	0.2	0.2	
1/5	0.200	296.4	229.8	66.6	34.6	0.133	4.6	4.8	
1/10	0.100	497.0	377.0	120.0	93.3	0.100	9.3	14.1	
1/20	0.050	119,628.3	110,206.1	9,422.2	4,771.1	0.050	238.6	252.7	
1/50	0.020	497,080.3	515,813.0	-18,732.7	-4,655.3	0.030	-139.7	113.0	
1/100 (1/144)	0.010	1,031,079.9	1,061,764.8	-30,684.9	-24,708.8	0.013	-322.6	-209.6	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：緊急対策整備H34

事業名：事業全体 （緊急対策整備H34～事業実施後H56） 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	20.7	21.0	-0.3	-0.2	0.500	-0.1	-0.1	
1/3	0.333	105.4	106.2	-0.8	-0.5	0.167	-0.1	-0.2	
1/5	0.200	229.8	229.5	0.3	-0.2	0.133	0.0	-0.2	
1/10	0.100	377.0	373.0	4.0	2.2	0.100	0.2	0.0	
1/20	0.050	110,206.1	633.8	109,572.3	54,788.2	0.050	2,739.4	2,739.4	
1/50	0.020	515,813.0	5,236.8	510,576.2	310,074.3	0.030	9,302.2	12,041.6	
1/100 (1/144)	0.010	1,061,764.8	843,266.0	218,498.8	364,537.5	0.013	4,759.2	16,800.8	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：事業実施前H15

事業名：事業全体 （事業実施前H15～現況H26） 資産+10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	36.2	23.0	13.2	6.6	0.500	3.3	3.3	
1/3	0.333	211.3	147.8	63.5	38.4	0.167	6.4	9.7	
1/5	0.200	971.0	743.4	227.6	145.6	0.133	19.4	29.1	
1/10	0.100	3,342.3	4,423.7	-1,081.4	-426.9	0.100	-42.7	-13.6	
1/20	0.050	157,322.3	160,874.5	-3,552.2	-2,316.8	0.050	-115.8	-129.4	
1/50	0.020	660,047.0	658,472.3	1,574.7	-988.8	0.030	-29.7	-159.1	
1/100 (1/144)	0.010	1,277,832.3	1,271,506.1	6,326.2	3,950.4	0.013	51.6	-107.5	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：現況H26

事業名：事業全体 （現況H26～緊急水防災整備H27） 資産+10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	23.0	23.0	0.0	0.0	0.500	0.0	0.0	
1/3	0.333	147.8	125.7	22.1	11.1	0.167	1.9	1.9	
1/5	0.200	743.4	674.3	69.1	45.6	0.133	6.1	8.0	
1/10	0.100	4,423.7	3,773.6	650.1	359.6	0.100	36.0	44.0	
1/20	0.050	160,874.5	158,752.1	2,122.4	1,386.3	0.050	69.3	113.3	
1/50	0.020	658,472.3	650,279.5	8,192.8	5,157.6	0.030	154.7	268.0	
1/100 (1/144)	0.010	1,271,506.1	1,261,419.9	10,086.2	9,139.5	0.013	119.3	387.3	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：緊急水防災整備H27

事業名：事業全体 （緊急水防災整備H27～当面整備H32） 資産+10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	23.0	22.7	0.3	0.2	0.500	0.1	0.1	
1/3	0.333	125.7	118.7	7.0	3.7	0.167	0.6	0.7	
1/5	0.200	674.3	325.7	348.6	177.8	0.133	23.6	24.3	
1/10	0.100	3,773.6	546.1	3,227.5	1,788.1	0.100	178.8	203.1	
1/20	0.050	158,752.1	131,127.7	27,624.4	15,426.0	0.050	771.3	974.4	
1/50	0.020	650,279.5	545,114.4	105,165.1	66,394.8	0.030	1,991.8	2,966.2	
1/100 (1/144)	0.010	1,261,419.9	1,130,853.0	130,566.9	117,866.0	0.013	1,538.8	4,505.0	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：当面整備H32

事業名：事業全体 （当面整備H32～緊急対策整備H34） 資産+10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	22.7	22.8	-0.1	-0.1	0.500	-0.1	-0.1	
1/3	0.333	118.7	115.9	2.8	1.4	0.167	0.2	0.1	
1/5	0.200	325.7	252.6	73.1	38.0	0.133	5.1	5.2	
1/10	0.100	546.1	414.4	131.7	102.4	0.100	10.2	15.4	
1/20	0.050	131,127.7	120,778.4	10,349.3	5,240.5	0.050	262.0	277.4	
1/50	0.020	545,114.4	565,655.0	-20,540.6	-5,095.6	0.030	-152.9	124.5	
1/100 (1/144)	0.010	1,130,853.0	1,164,526.0	-33,673.0	-27,106.8	0.013	-353.9	-229.4	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：緊急対策整備H34

事業名：事業全体 （緊急対策整備H34～事業実施後H56） 資産+10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	22.8	23.1	-0.3	-0.2	0.500	-0.1	-0.1	
1/3	0.333	115.9	116.8	-0.9	-0.6	0.167	-0.1	-0.2	
1/5	0.200	252.6	252.3	0.3	-0.3	0.133	0.0	-0.2	
1/10	0.100	414.4	409.9	4.5	2.4	0.100	0.2	0.0	
1/20	0.050	120,778.4	696.4	120,082.0	60,043.3	0.050	3,002.2	3,002.2	
1/50	0.020	565,655.0	5,748.7	559,906.3	339,994.2	0.030	10,199.8	13,202.0	
1/100 (1/144)	0.010	1,164,526.0	924,794.7	239,731.3	399,818.8	0.013	5,219.9	18,421.9	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：事業実施前H15

事業名：事業全体 （事業実施前H15～現況H26） 資産-10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	29.7	18.8	10.9	5.5	0.500	2.8	2.8	
1/3	0.333	173.3	121.2	52.1	31.5	0.167	5.3	8.1	
1/5	0.200	797.0	610.1	186.9	119.5	0.133	15.9	24.0	
1/10	0.100	2,746.4	3,632.4	-886.0	-349.6	0.100	-35.0	-11.0	
1/20	0.050	129,709.4	132,637.0	-2,927.6	-1,906.8	0.050	-95.3	-106.3	
1/50	0.020	543,752.2	542,452.9	1,299.3	-814.2	0.030	-24.4	-130.7	
1/100 (1/144)	0.010	1,052,171.0	1,046,984.6	5,186.4	3,242.8	0.013	42.3	-88.4	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：現況H26

事業名：事業全体 （現況H26～緊急水防災整備H27） 資産-10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	18.8	18.8	0.0	0.0	0.500	0.0	0.0	
1/3	0.333	121.2	102.9	18.3	9.2	0.167	1.5	1.5	
1/5	0.200	610.1	553.2	56.9	37.6	0.133	5.0	6.5	
1/10	0.100	3,632.4	3,096.2	536.2	296.6	0.100	29.7	36.2	
1/20	0.050	132,637.0	130,886.7	1,750.3	1,143.3	0.050	57.2	93.4	
1/50	0.020	542,452.9	535,706.5	6,746.4	4,248.4	0.030	127.5	220.9	
1/100 (1/144)	0.010	1,046,984.6	1,038,684.1	8,300.5	7,523.5	0.013	98.2	319.1	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：緊急水防災整備H27

事業名：事業全体 （緊急水防災整備H27～当面整備H32） 資産-10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	18.8	18.6	0.2	0.1	0.500	0.1	0.1	
1/3	0.333	102.9	97.2	5.7	3.0	0.167	0.5	0.6	
1/5	0.200	553.2	267.0	286.2	146.0	0.133	19.4	20.0	
1/10	0.100	3,096.2	448.0	2,648.2	1,467.2	0.100	146.7	166.7	
1/20	0.050	130,886.7	108,128.8	22,757.9	12,703.1	0.050	635.2	801.9	
1/50	0.020	535,706.5	449,046.1	86,660.4	54,709.2	0.030	1,641.3	2,443.2	
1/100 (1/144)	0.010	1,038,684.1	931,306.8	107,377.3	97,018.9	0.013	1,266.6	3,709.8	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：当面整備H32

事業名：事業全体 （当面整備H32～緊急対策整備H34） 資産-10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	18.6	18.6	0.0	0.0	0.500	0.0	0.0	
1/3	0.333	97.2	94.9	2.3	1.2	0.167	0.2	0.2	
1/5	0.200	267.0	207.0	60.0	31.2	0.133	4.1	4.3	
1/10	0.100	448.0	339.7	108.3	84.2	0.100	8.4	12.7	
1/20	0.050	108,128.8	99,633.7	8,495.1	4,301.7	0.050	215.1	227.8	
1/50	0.020	449,046.1	465,971.0	-16,924.9	-4,214.9	0.030	-126.4	101.4	
1/100 (1/144)	0.010	931,306.8	959,003.6	-27,696.8	-22,310.9	0.013	-291.3	-189.9	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：緊急対策整備H34

事業名：事業全体 （緊急対策整備H34～事業実施後H56） 資産-10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	18.6	18.9	-0.3	-0.1	0.500	-0.1	-0.1	
1/3	0.333	94.9	95.7	-0.8	-0.5	0.167	-0.1	-0.2	
1/5	0.200	207.0	206.7	0.3	-0.2	0.133	0.0	-0.2	
1/10	0.100	339.7	336.0	3.7	2.0	0.100	0.2	0.0	
1/20	0.050	99,633.7	571.2	99,062.5	49,533.1	0.050	2,476.7	2,476.7	
1/50	0.020	465,971.0	4,724.8	461,246.2	280,154.4	0.030	8,404.6	10,881.3	
1/100 (1/144)	0.010	959,003.6	761,737.2	197,266.4	329,256.3	0.013	4,298.6	15,179.9	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－５ 費用対便益（全体事業）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	便 益 (B)				費 用 (C)						費用便益比 B/C	純現在価値 B-C	
			割引率 4 %	便益①		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用			現在価値
整備期間 (41年)	H15	-10	1.480	0.0	0.0			2,071.0	3,195.0	443.0	683.4	2,514.0	3,878.4		
	H16	-9	1.423	-14.6	-20.8			6,058.0	8,949.8	444.0	655.9	6,502.0	9,605.7		
	H17	-8	1.369	-32.8	-44.9			3,006.0	4,251.0	419.9	593.8	3,425.9	4,844.8		
	H18	-7	1.316	-47.7	-62.8			4,194.0	5,639.4	475.2	639.0	4,669.2	6,278.4		
	H19	-6	1.265	-64.3	-81.3			6,677.0	8,495.8	498.2	633.9	7,175.2	9,129.7		
	H20	-5	1.217	-95.8	-116.6			7,494.3	8,905.0	441.9	525.1	7,936.2	9,430.1		
	H21	-4	1.170	-125.4	-146.7			5,855.0	6,903.8	455.0	536.5	6,310.0	7,440.3		
	H22	-3	1.125	-140.2	-157.7			6,850.8	7,805.4	342.8	390.6	7,193.6	8,196.0		
	H23	-2	1.082	-153.2	-165.8			7,002.0	7,576.2	916.0	991.1	7,918.0	8,567.3		
	H24	-1	1.040	-159.9	-166.3			13,413.3	13,949.8	581.5	604.8	13,994.8	14,554.6		
	H25	0	1.000	-155.7	-155.7			6,199.3	6,199.3	294.7	294.7	6,494.0	6,494.0		
	H26	1	0.962	-97.9	-94.2			9,606.8	9,241.7	489.0	470.4	10,095.8	9,712.1		
	H27	2	0.925	255.2	236.1			5,559.9	5,142.9	274.6	254.0	5,834.5	5,396.9		
	H28	3	0.889	1,065.7	947.4			7,604.7	6,760.6	529.4	470.6	8,134.1	7,231.2		
	H29	4	0.855	1,772.5	1,515.5			7,313.1	6,252.7	498.0	425.8	7,811.1	6,678.5		
	H30	5	0.822	2,388.7	1,963.5			8,907.9	7,322.3	713.6	586.6	9,621.5	7,908.9		
	H31	6	0.790	3,329.8	2,630.5			9,356.7	7,391.8	750.4	592.8	10,107.1	7,984.6		
	H32	7	0.760	4,362.7	3,315.7			4,817.1	3,661.0	390.4	296.7	5,207.5	3,957.7		
	H33	8	0.731	4,240.9	3,100.1			4,820.7	3,523.9	390.7	285.6	5,211.4	3,809.5		
	H34	9	0.703	4,153.1	2,919.6			861.3	605.5	72.4	50.9	933.7	656.4		
	H35	10	0.676	6,203.2	4,193.4			861.2	582.2	72.4	48.9	933.6	631.1		
	H36	11	0.650	8,253.4	5,364.7			861.2	559.8	72.4	47.1	933.6	606.9		
	H37	12	0.625	10,303.5	6,439.7			819.3	512.1	72.5	45.3	891.8	557.4		
	H38	13	0.601	12,353.4	7,424.4			819.3	492.4	72.5	43.6	891.8	536.0		
	H39	14	0.577	14,403.3	8,310.7			819.2	472.7	72.4	41.8	891.6	514.5		
	H40	15	0.555	16,453.2	9,131.5			819.2	454.7	72.4	40.2	891.6	494.9		
	H41	16	0.534	18,504.1	9,881.2			790.0	421.9	301.5	161.0	1,091.5	582.9		
	H42	17	0.513	18,698.8	9,592.5			790.0	405.3	301.5	154.7	1,091.5	560.0		
	H43	18	0.494	18,893.4	9,333.3			790.0	390.3	301.5	148.9	1,091.5	539.2		
	H44	19	0.475	19,088.1	9,066.8			790.0	375.3	301.5	143.2	1,091.5	518.5		
	H45	20	0.456	19,282.8	8,793.0			790.0	360.2	301.5	137.5	1,091.5	497.7		
H46	21	0.439	19,477.5	8,550.6			734.9	322.6	297.1	130.4	1,032.0	453.0			
H47	22	0.422	19,658.6	8,295.9			734.9	310.1	297.1	125.4	1,032.0	435.5			
H48	23	0.406	19,839.6	8,054.9			734.9	298.4	297.1	120.6	1,032.0	419.0			
H49	24	0.390	20,020.7	7,808.1			734.9	286.6	297.1	115.9	1,032.0	402.5			
H50	25	0.375	20,201.8	7,575.7			734.9	275.6	297.1	111.4	1,032.0	387.0			
H51	26	0.361	20,382.9	7,358.2			463.4	167.3	275.4	99.4	738.8	266.7			
H52	27	0.347	20,497.1	7,112.5			463.4	160.8	275.4	95.6	738.8	256.4			
H53	28	0.333	20,611.3	6,863.6			463.4	154.3	275.4	91.7	738.8	246.0			
H54	29	0.321	20,725.5	6,652.9			463.4	148.8	275.4	88.4	738.8	237.2			
H55	30	0.308	20,839.7	6,418.6			463.4	142.7	275.4	84.8	738.8	227.5			
施設完成後の 評価期間 (50年)	H56	31	0.296	20,953.9	6,202.4					349.6	103.5	349.6	103.5		
	H57	32	0.285	20,953.9	5,971.9					349.6	99.6	349.6	99.6		
	H58	33	0.274	20,953.9	5,741.4					349.6	95.8	349.6	95.8		
	H59	34	0.264	20,953.9	5,531.8					349.6	92.3	349.6	92.3		
	H60	35	0.253	20,953.9	5,301.3					349.6	88.4	349.6	88.4		
	H61	36	0.244	20,953.9	5,112.8					349.6	85.3	349.6	85.3		
	H62	37	0.234	20,953.9	4,903.2					349.6	81.8	349.6	81.8		
	H63	38	0.225	20,953.9	4,714.6					349.6	78.7	349.6	78.7		
	H64	39	0.217	20,953.9	4,547.0					349.6	75.9	349.6	75.9		
	H65	40	0.208	20,953.9	4,358.4					349.6	72.7	349.6	72.7		
	H66	41	0.200	20,953.9	4,190.8					349.6	69.9	349.6	69.9		
	H67	42	0.193	20,953.9	4,044.1					349.6	67.5	349.6	67.5		
	H68	43	0.185	20,953.9	3,876.5					349.6	64.7	349.6	64.7		
	H69	44	0.178	20,953.9	3,729.8					349.6	62.2	349.6	62.2		
	H70	45	0.171	20,953.9	3,583.1					349.6	59.8	349.6	59.8		
	H71	46	0.165	20,953.9	3,457.4					349.6	57.7	349.6	57.7		
	H72	47	0.158	20,953.9	3,310.7					349.6	55.2	349.6	55.2		
	H73	48	0.152	20,953.9	3,185.0					349.6	53.1	349.6	53.1		
	H74	49	0.146	20,953.9	3,059.3					349.6	51.0	349.6	51.0		
	H75	50	0.141	20,953.9	2,954.5					349.6	49.3	349.6	49.3		
	H76	51	0.135	20,953.9	2,828.8					349.6	47.2	349.6	47.2		
	H77	52	0.130	20,953.9	2,724.0					349.6	45.4	349.6	45.4		
	H78	53	0.125	20,953.9	2,619.2					349.6	43.7	349.6	43.7		
	H79	54	0.120	20,953.9	2,514.5					349.6	42.0	349.6	42.0		
	H80	55	0.116	20,953.9	2,430.7					349.6	40.6	349.6	40.6		
	H81	56	0.111	20,953.9	2,325.9					349.6	38.8	349.6	38.8		
	H82	57	0.107	20,953.9	2,242.1					349.6	37.4	349.6	37.4		
	H83	58	0.103	20,953.9	2,158.3					349.6	36.0	349.6	36.0		
	H84	59	0.099	20,953.9	2,074.4					349.6	34.6	349.6	34.6		
	H85	60	0.095	20,953.9	1,990.6					349.6	33.2	349.6	33.2		
	H86	61	0.091	20,953.9	1,906.8					349.6	31.8	349.6	31.8		
	H87	62	0.088	20,953.9	1,843.9					349.6	30.8	349.6	30.8		
	H88	63	0.085	20,953.9	1,781.1					349.6	29.7	349.6	29.7		
	H89	64	0.081	20,953.9	1,697.3					349.6	28.3	349.6	28.3		
	H90	65	0.078	20,953.9	1,634.4					349.6	27.3	349.6	27.3		
	H91	66	0.075	20,953.9	1,571.5					349.6	26.2	349.6	26.2		
	H92	67	0.072	20,953.9	1,508.7					349.6	25.2	349.6	25.2		
	H93	68	0.069	20,953.9	1,445.8					349.6	24.1	349.6	24.1		
	H94	69	0.067	20,953.9	1,403.9					349.6	23.4	349.6	23.4		
	H95	70	0.064	20,953.9	1,341.0					349.6	22.4	349.6	22.4		
	H96	71	0.062	20,953.9	1,299.1					349.6	21.7	349.6	21.7		
	H97	72	0.059	20,953.9	1,236.3					349.6	20.6	349.6	20.6		
	H98	73	0.057	20,953.9	1,194.4					349.6	19.9	349.6	19.9		
	H99	74	0.055	20,953.9	1,152.5					349.6	19.2	349.6	19.2		
	H100	75	0.053	20,953.9	1,110.6					349.6	18.5	349.6	18.5		
	H101	76	0.051	20,953.9	1,068.6					349.6	17.8	349.6	17.8		
	H102	77	0.049	20,953.9	1,026.7					349.6	17.1	349.6	17.1		
	H103	78	0.047	20,953.9	984.8										

様式－５ 費用対便益（全体事業・残事業費+10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	便 益 (B)				残存価値 ②	計 ①+②	費 用 (C)						費用便益比 B/C	純現在価値 B-C
			割引率 4 %	便益①		建設費③ 費用			維持管理費④ 費用		計③+④					
				便益	現在価値				現在価値	費用	現在価値	費用	現在価値			
整備期間 (41年)	H15	-10	1.480	0.0	0.0	2,071.0	3,195.0	443.0	683.4	2,514.0	3,878.4					
	H16	-9	1.423	-14.6	-20.8	6,058.0	8,949.8	444.0	655.9	6,502.0	9,605.7					
	H17	-8	1.369	-32.8	-44.9	3,006.0	4,251.0	419.9	593.8	3,425.9	4,844.8					
	H18	-7	1.316	-47.7	-62.8	4,194.0	5,639.4	475.2	639.0	4,669.2	6,278.4					
	H19	-6	1.265	-64.3	-81.3	6,677.0	8,495.8	498.2	633.9	7,175.2	9,129.7					
	H20	-5	1.217	-95.8	-116.6	7,494.3	8,905.0	441.9	525.1	7,936.2	9,430.1					
	H21	-4	1.170	-125.4	-146.7	5,855.0	6,903.8	455.0	536.5	6,310.0	7,440.3					
	H22	-3	1.125	-140.2	-157.7	6,850.8	7,805.4	342.8	390.6	7,193.6	8,196.0					
	H23	-2	1.082	-153.2	-165.8	7,002.0	7,576.2	916.0	991.1	7,918.0	8,567.3					
	H24	-1	1.040	-159.9	-166.3	13,413.3	13,949.8	581.5	604.8	13,994.8	14,554.6					
	H25	0	1.000	-155.7	-155.7	6,199.3	6,199.3	294.7	294.7	6,494.0	6,494.0					
	H26	1	0.962	-97.9	-94.2	10,567.5	10,165.9	537.9	517.5	11,105.4	10,683.4					
	H27	2	0.925	255.2	236.1	6,115.9	5,657.2	302.1	279.4	6,418.0	5,936.6					
	H28	3	0.889	1,065.7	947.4	8,365.2	7,436.6	582.3	517.7	8,947.5	7,954.3					
	H29	4	0.855	1,772.5	1,515.5	8,044.4	6,878.0	547.8	468.4	8,592.2	7,346.4					
	H30	5	0.822	2,388.7	1,963.5	9,798.7	8,054.5	784.9	645.2	10,583.6	8,699.7					
	H31	6	0.790	3,329.8	2,630.5	10,292.4	8,131.0	825.4	652.1	11,117.8	8,783.1					
	H32	7	0.760	4,362.7	3,315.7	5,298.8	4,027.1	429.3	326.3	5,728.1	4,353.4					
	H33	8	0.731	4,240.9	3,100.1	5,302.8	3,876.3	429.6	314.0	5,732.4	4,190.3					
	H34	9	0.703	4,153.1	2,919.6	947.4	666.0	79.8	56.1	1,027.2	722.1					
	H35	10	0.676	6,203.2	4,193.4	947.3	640.4	79.7	53.9	1,027.0	694.3					
	H36	11	0.650	8,253.4	5,364.7	947.3	615.8	79.7	51.8	1,027.0	667.6					
	H37	12	0.625	10,303.5	6,439.7	901.2	563.3	79.7	49.8	980.9	613.1					
	H38	13	0.601	12,353.4	7,424.4	901.2	541.6	79.7	47.9	980.9	589.5					
	H39	14	0.577	14,403.3	8,310.7	901.1	519.9	79.7	46.0	980.8	565.9					
	H40	15	0.555	16,453.2	9,131.5	901.1	500.1	79.7	44.2	980.8	544.3					
	H41	16	0.534	18,504.1	9,881.2	869.0	464.0	317.4	169.5	1,186.4	633.5					
	H42	17	0.513	18,698.8	9,592.5	869.0	445.8	317.4	162.8	1,186.4	608.6					
	H43	18	0.494	18,893.4	9,333.3	869.0	429.3	317.4	156.8	1,186.4	586.1					
	H44	19	0.475	19,088.1	9,066.8	869.0	412.8	317.4	150.8	1,186.4	563.6					
H45	20	0.456	19,282.8	8,793.0	869.0	396.3	317.4	144.7	1,186.4	541.0						
H46	21	0.439	19,477.5	8,550.6	808.4	354.9	312.6	137.2	1,121.0	492.1						
H47	22	0.422	19,658.6	8,295.9	808.4	341.1	312.6	131.9	1,121.0	473.0						
H48	23	0.406	19,839.6	8,054.9	808.4	328.2	312.6	126.9	1,121.0	455.1						
H49	24	0.390	20,020.7	7,808.1	808.4	315.3	312.6	121.9	1,121.0	437.2						
H50	25	0.375	20,201.8	7,575.7	808.4	303.1	312.6	117.2	1,121.0	420.3						
H51	26	0.361	20,382.9	7,358.2	509.7	184.0	288.7	104.2	798.4	288.2						
H52	27	0.347	20,497.1	7,112.5	509.7	176.9	288.7	100.2	798.4	277.1						
H53	28	0.333	20,611.3	6,863.6	509.7	169.7	288.7	96.1	798.4	265.8						
H54	29	0.321	20,725.5	6,652.9	509.7	163.6	288.7	92.7	798.4	256.3						
H55	30	0.308	20,839.7	6,418.6	509.7	157.0	288.7	88.9	798.4	245.9						
施設完成後の 評価期間 (50年)	H56	31	0.296	20,953.9	6,202.4			366.5	108.5	366.5	108.5					
	H57	32	0.285	20,953.9	5,971.9			366.5	104.5	366.5	104.5					
	H58	33	0.274	20,953.9	5,741.4			366.5	100.4	366.5	100.4					
	H59	34	0.264	20,953.9	5,531.8			366.5	96.8	366.5	96.8					
	H60	35	0.253	20,953.9	5,301.3			366.5	92.7	366.5	92.7					
	H61	36	0.244	20,953.9	5,112.8			366.5	89.4	366.5	89.4					
	H62	37	0.234	20,953.9	4,903.2			366.5	85.8	366.5	85.8					
	H63	38	0.225	20,953.9	4,714.6			366.5	82.5	366.5	82.5					
	H64	39	0.217	20,953.9	4,547.0			366.5	79.5	366.5	79.5					
	H65	40	0.208	20,953.9	4,358.4			366.5	76.2	366.5	76.2					
	H66	41	0.200	20,953.9	4,190.8			366.5	73.3	366.5	73.3					
	H67	42	0.193	20,953.9	4,044.1			366.5	70.7	366.5	70.7					
	H68	43	0.185	20,953.9	3,876.5			366.5	67.8	366.5	67.8					
	H69	44	0.178	20,953.9	3,729.8			366.5	65.2	366.5	65.2					
	H70	45	0.171	20,953.9	3,583.1			366.5	62.7	366.5	62.7					
	H71	46	0.165	20,953.9	3,457.4			366.5	60.5	366.5	60.5					
	H72	47	0.158	20,953.9	3,310.7			366.5	57.9	366.5	57.9					
	H73	48	0.152	20,953.9	3,185.0			366.5	55.7	366.5	55.7					
	H74	49	0.146	20,953.9	3,059.3			366.5	53.5	366.5	53.5					
	H75	50	0.141	20,953.9	2,954.5			366.5	51.7	366.5	51.7					
	H76	51	0.135	20,953.9	2,828.8			366.5	49.5	366.5	49.5					
	H77	52	0.130	20,953.9	2,724.0			366.5	47.6	366.5	47.6					
	H78	53	0.125	20,953.9	2,619.2			366.5	45.8	366.5	45.8					
	H79	54	0.120	20,953.9	2,514.5			366.5	44.0	366.5	44.0					
	H80	55	0.116	20,953.9	2,430.7			366.5	42.5	366.5	42.5					
	H81	56	0.111	20,953.9	2,325.9			366.5	40.7	366.5	40.7					
	H82	57	0.107	20,953.9	2,242.1			366.5	39.2	366.5	39.2					
	H83	58	0.103	20,953.9	2,158.3			366.5	37.7	366.5	37.7					
	H84	59	0.099	20,953.9	2,074.4			366.5	36.3	366.5	36.3					
	H85	60	0.095	20,953.9	1,990.6			366.5	34.8	366.5	34.8					
H86	61	0.091	20,953.9	1,906.8			366.5	33.4	366.5	33.4						
H87	62	0.088	20,953.9	1,843.9			366.5	32.3	366.5	32.3						
H88	63	0.085	20,953.9	1,781.1			366.5	31.2	366.5	31.2						
H89	64	0.081	20,953.9	1,697.3			366.5	29.7	366.5	29.7						
H90	65	0.078	20,953.9	1,634.4			366.5	28.6	366.5	28.6						
H91	66	0.075	20,953.9	1,571.5			366.5	27.5	366.5	27.5						
H92	67	0.072	20,953.9	1,508.7			366.5	26.4	366.5	26.4						
H93	68	0.069	20,953.9	1,445.8			366.5	25.3	366.5	25.3						
H94	69	0.067	20,953.9	1,403.9			366.5	24.6	366.5	24.6						
H95	70	0.064	20,953.9	1,341.0			366.5	23.5	366.5	23.5						
H96	71	0.062	20,953.9	1,299.1			366.5	22.7	366.5	22.7						
H97	72	0.059	20,953.9	1,236.3			366.5	21.6	366.5	21.6						
H98	73	0.057	20,953.9	1,194.4			366.5	20.9	366.5	20.9						
H99	74	0.055	20,953.9	1,152.5			366.5	20.2	366.5	20.2						
H100	75	0.053	20,953.9	1,110.6			366.5	19.4	366.5	19.4						
H101	76	0.051	20,953.9	1,068.6			366.5	18.7	366.5	18.7						
H102	77	0.049	20,953.9	1,026.7			366.5	18.0	366.5	18.0						
H103	78	0.047	20,953.9	984.8			366.5	17.2	366.5	17.2						
H104	79	0.045	20,953.9	942.9			366.5	16.5	366.5	16.5						
H105	80	0.043	20,953.9	901.0			366.5	15.8	366.5	15.8						
	合 計			1,432,868.0	316,373.6	1,066.0	317,439.6	149,988								

様式－５ 費用対便益（全体事業・残事業費-10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	便 益 (B)				残存価値 ②	計 ①+②	費 用 (C)						費用便益比 B/C	純現在価値 B-C
			割引率 4 %	便益①		建設費③			維持管理費④		計③+④					
				便益	現在価値				費用	現在価値	費用	現在価値				
整備期間 (41年)	H15	-10	1.480	0.0	0.0			2,071.0	3,195.0	443.0	683.4	2,514.0	3,878.4			
	H16	-9	1.423	-14.6	-20.8			6,058.0	8,949.8	444.0	655.9	6,502.0	9,605.7			
	H17	-8	1.369	-32.8	-44.9			3,006.0	4,251.0	419.9	593.8	3,425.9	4,844.8			
	H18	-7	1.316	-47.7	-62.8			4,194.0	5,639.4	475.2	639.0	4,669.2	6,278.4			
	H19	-6	1.265	-64.3	-81.3			6,677.0	8,495.8	498.2	633.9	7,175.2	9,129.7			
	H20	-5	1.217	-95.8	-116.6			7,494.3	8,905.0	441.9	525.1	7,936.2	9,430.1			
	H21	-4	1.170	-125.4	-146.7			5,855.0	6,903.8	455.0	536.5	6,310.0	7,440.3			
	H22	-3	1.125	-140.2	-157.7			6,850.8	7,805.4	342.8	390.6	7,193.6	8,196.0			
	H23	-2	1.082	-153.2	-165.8			7,002.0	7,576.2	916.0	991.1	7,918.0	8,567.3			
	H24	-1	1.040	-159.9	-166.3			13,413.3	13,949.8	581.5	604.8	13,994.8	14,554.6			
	H25	0	1.000	-155.7	-155.7			6,199.3	6,199.3	294.7	294.7	6,494.0	6,494.0			
	H26	1	0.962	-97.9	-94.2			8,646.1	8,317.6	440.1	423.4	9,086.2	8,741.0			
	H27	2	0.925	255.2	236.1			5,003.9	4,628.6	247.2	228.7	5,251.1	4,857.3			
	H28	3	0.889	1,065.7	947.4			6,844.2	6,084.5	476.4	423.5	7,320.6	6,508.0			
	H29	4	0.855	1,772.5	1,515.5			6,581.8	5,627.4	448.3	383.3	7,030.1	6,010.7			
	H30	5	0.822	2,388.7	1,963.5			8,017.1	6,590.1	642.1	527.8	8,659.2	7,117.9			
	H31	6	0.790	3,329.8	2,630.5			8,421.0	6,652.6	675.4	533.6	9,096.4	7,186.2			
	H32	7	0.760	4,362.7	3,315.7			4,335.4	3,294.9	351.3	267.0	4,686.7	3,561.9			
	H33	8	0.731	4,240.9	3,100.1			4,338.6	3,171.5	351.6	257.0	4,690.2	3,428.5			
	H34	9	0.703	4,153.1	2,919.6			775.2	544.9	65.2	45.8	840.4	590.7			
	H35	10	0.676	6,203.2	4,193.4			775.1	524.0	65.2	44.1	840.3	568.1			
	H36	11	0.650	8,253.4	5,364.7			775.1	503.8	65.2	42.4	840.3	546.2			
	H37	12	0.625	10,303.5	6,439.7			737.4	460.9	65.2	40.8	802.6	501.7			
	H38	13	0.601	12,353.4	7,424.4			737.4	443.2	65.2	39.2	802.6	482.4			
	H39	14	0.577	14,403.3	8,310.7			737.3	425.4	65.2	37.6	802.5	463.0			
	H40	15	0.555	16,453.2	9,131.5			737.3	409.2	65.2	36.2	802.5	445.4			
	H41	16	0.534	18,504.1	9,881.2			711.0	379.7	285.7	152.6	996.7	532.3			
	H42	17	0.513	18,698.8	9,592.5			711.0	364.7	285.7	146.6	996.7	511.3			
	H43	18	0.494	18,893.4	9,333.3			711.0	351.2	285.7	141.1	996.7	492.3			
	H44	19	0.475	19,088.1	9,066.8			711.0	337.7	285.7	135.7	996.7	473.4			
H45	20	0.456	19,282.8	8,793.0			711.0	324.2	285.7	130.3	996.7	454.5				
H46	21	0.439	19,477.5	8,550.6			661.4	290.4	281.7	123.7	943.1	414.1				
H47	22	0.422	19,658.6	8,295.9			661.4	279.1	281.7	118.9	943.1	398.0				
H48	23	0.406	19,839.6	8,054.9			661.4	268.5	281.7	114.4	943.1	382.9				
H49	24	0.390	20,020.7	7,808.1			661.4	257.9	281.7	109.9	943.1	367.8				
H50	25	0.375	20,201.8	7,575.7			661.4	248.0	281.7	105.6	943.1	353.6				
H51	26	0.361	20,382.9	7,358.2			417.1	150.6	262.2	94.7	679.3	245.3				
H52	27	0.347	20,497.1	7,112.5			417.1	144.7	262.2	91.0	679.3	235.7				
H53	28	0.333	20,611.3	6,863.6			417.1	138.9	262.2	87.3	679.3	226.2				
H54	29	0.321	20,725.5	6,652.9			417.1	133.9	262.2	84.2	679.3	218.1				
H55	30	0.308	20,839.7	6,418.6			417.1	128.5	262.2	80.8	679.3	209.3				
施設完成後の 評価期間 (50年)	H56	31	0.296	20,953.9	6,202.4					332.9	98.5	332.9	98.5			
	H57	32	0.285	20,953.9	5,971.9					332.9	94.9	332.9	94.9			
	H58	33	0.274	20,953.9	5,741.4					332.9	91.2	332.9	91.2			
	H59	34	0.264	20,953.9	5,531.8					332.9	87.9	332.9	87.9			
	H60	35	0.253	20,953.9	5,301.3					332.9	84.2	332.9	84.2			
	H61	36	0.244	20,953.9	5,112.8					332.9	81.2	332.9	81.2			
	H62	37	0.234	20,953.9	4,903.2					332.9	77.9	332.9	77.9			
	H63	38	0.225	20,953.9	4,714.6					332.9	74.9	332.9	74.9			
	H64	39	0.217	20,953.9	4,547.0					332.9	72.2	332.9	72.2			
	H65	40	0.208	20,953.9	4,358.4					332.9	69.2	332.9	69.2			
	H66	41	0.200	20,953.9	4,190.8					332.9	66.6	332.9	66.6			
	H67	42	0.193	20,953.9	4,044.1					332.9	64.2	332.9	64.2			
	H68	43	0.185	20,953.9	3,876.5					332.9	61.6	332.9	61.6			
	H69	44	0.178	20,953.9	3,729.8					332.9	59.3	332.9	59.3			
	H70	45	0.171	20,953.9	3,583.1					332.9	56.9	332.9	56.9			
	H71	46	0.165	20,953.9	3,457.4					332.9	54.9	332.9	54.9			
	H72	47	0.158	20,953.9	3,310.7					332.9	52.6	332.9	52.6			
	H73	48	0.152	20,953.9	3,185.0					332.9	50.6	332.9	50.6			
	H74	49	0.146	20,953.9	3,059.3					332.9	48.6	332.9	48.6			
	H75	50	0.141	20,953.9	2,954.5					332.9	46.9	332.9	46.9			
	H76	51	0.135	20,953.9	2,828.8					332.9	44.9	332.9	44.9			
	H77	52	0.130	20,953.9	2,724.0					332.9	43.3	332.9	43.3			
	H78	53	0.125	20,953.9	2,619.2					332.9	41.6	332.9	41.6			
	H79	54	0.120	20,953.9	2,514.5					332.9	39.9	332.9	39.9			
	H80	55	0.116	20,953.9	2,430.7					332.9	38.6	332.9	38.6			
	H81	56	0.111	20,953.9	2,325.9					332.9	37.0	332.9	37.0			
	H82	57	0.107	20,953.9	2,242.1					332.9	35.6	332.9	35.6			
	H83	58	0.103	20,953.9	2,158.3					332.9	34.3	332.9	34.3			
	H84	59	0.099	20,953.9	2,074.4					332.9	33.0	332.9	33.0			
	H85	60	0.095	20,953.9	1,990.6					332.9	31.6	332.9	31.6			
H86	61	0.091	20,953.9	1,906.8					332.9	30.3	332.9	30.3				
H87	62	0.088	20,953.9	1,843.9					332.9	29.3	332.9	29.3				
H88	63	0.085	20,953.9	1,781.1					332.9	28.3	332.9	28.3				
H89	64	0.081	20,953.9	1,697.3					332.9	27.0	332.9	27.0				
H90	65	0.078	20,953.9	1,634.4					332.9	26.0	332.9	26.0				
H91	66	0.075	20,953.9	1,571.5					332.9	25.0	332.9	25.0				
H92	67	0.072	20,953.9	1,508.7					332.9	24.0	332.9	24.0				
H93	68	0.069	20,953.9	1,445.8					332.9	23.0	332.9	23.0				
H94	69	0.067	20,953.9	1,403.9					332.9	22.3	332.9	22.3				
H95	70	0.064	20,953.9	1,341.0					332.9	21.3	332.9	21.3				
H96	71	0.062	20,953.9	1,299.1					332.9	20.6	332.9	20.6				
H97	72	0.059	20,953.9	1,236.3					332.9	19.6	332.9	19.6				
H98	73	0.057	20,953.9	1,194.4					332.9	19.0	332.9	19.0				
H99	74	0.055	20,953.9	1,152.5					332.9	18.3	332.9	18.3				
H100	75	0.053	20,953.9	1,110.6				</								

様式－５ 費用対便益（全体事業・工期+10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	割引率 4%	便 益（Ｂ）			費 用（Ｃ）						費用便益比 Ｂ／Ｃ	純現在価値 Ｂ－Ｃ	
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用			現在価値
整備期間（４４年）	H15	-10	1.480	0.0	0.0			2,071.0	3,195.0	443.0	683.4	2,514.0	3,878.4		
	H16	-9	1.423	-14.6	-20.8			6,058.0	8,949.8	444.0	655.9	6,502.0	9,605.7		
	H17	-8	1.369	-32.8	-44.9			3,006.0	4,251.0	419.9	593.8	3,425.9	4,844.8		
	H18	-7	1.316	-47.7	-62.8			4,194.0	5,639.4	475.2	639.0	4,669.2	6,278.4		
	H19	-6	1.265	-64.3	-81.3			6,677.0	8,495.8	498.2	633.9	7,175.2	9,129.7		
	H20	-5	1.217	-95.8	-116.6			7,494.3	8,905.0	441.9	525.1	7,936.2	9,430.1		
	H21	-4	1.170	-125.4	-146.7			5,855.0	6,903.8	455.0	536.5	6,310.0	7,440.3		
	H22	-3	1.125	-140.2	-157.7			6,850.8	7,805.4	342.8	390.6	7,193.6	8,196.0		
	H23	-2	1.082	-153.2	-165.8			7,002.0	7,576.2	916.0	991.1	7,918.0	8,567.3		
	H24	-1	1.040	-159.9	-166.3			13,413.3	13,949.8	581.5	604.8	13,994.8	14,554.6		
	H25	0	1.000	-155.7	-155.7			6,199.3	6,199.3	294.7	294.7	6,494.0	6,494.0		
	H26	1	0.962	-97.9	-94.2			8,733.4	8,401.5	444.6	427.7	9,178.0	8,829.2		
	H27	2	0.925	223.1	206.4			5,422.2	5,015.5	270.8	250.5	5,693.0	5,266.0		
	H28	3	0.889	918.3	816.4			6,541.6	5,815.5	435.8	387.4	6,977.4	6,202.9		
	H29	4	0.855	1,579.7	1,350.7			6,727.8	5,752.3	462.2	395.2	7,190.0	6,147.5		
	H30	5	0.822	2,164.6	1,779.3			7,518.2	6,180.0	571.1	469.4	8,089.3	6,649.4		
	H31	6	0.790	2,902.0	2,292.6			8,302.0	6,558.6	666.3	526.4	8,968.3	7,085.0		
	H32	7	0.760	3,772.8	2,867.4			6,855.2	5,210.0	552.1	419.6	7,407.3	5,629.6		
	H33	8	0.731	4,318.4	3,156.8			4,380.1	3,201.9	355.7	260.0	4,735.8	3,461.9		
	H34	9	0.703	4,207.7	2,958.0			3,662.5	2,574.7	298.1	209.6	3,960.6	2,784.3		
	H35	10	0.676	4,525.8	3,059.5			783.0	529.3	66.8	45.2	849.8	574.5		
	H36	11	0.650	6,389.6	4,153.2			782.9	508.9	66.8	43.4	849.7	552.3		
	H37	12	0.625	8,253.4	5,158.4			782.9	489.3	66.8	41.8	849.7	531.1		
	H38	13	0.601	10,117.1	6,080.4			748.6	449.9	66.8	40.1	815.4	490.0		
	H39	14	0.577	11,980.7	6,912.9			744.9	429.8	66.8	38.5	811.7	468.3		
	H40	15	0.555	13,844.2	7,683.6			744.8	413.4	66.8	37.1	811.6	450.5		
	H41	16	0.534	15,707.8	8,388.0			744.8	397.7	66.8	35.7	811.6	433.4		
	H42	17	0.513	17,571.3	9,014.1			731.5	375.3	66.7	34.2	798.2	409.5		
	H43	18	0.494	18,592.6	9,184.7			718.2	354.8	279.5	138.1	997.7	492.9		
	H44	19	0.475	18,769.6	8,915.5			718.2	341.1	279.5	132.8	997.7	473.9		
	H45	20	0.456	18,946.5	8,639.6			718.2	327.5	279.5	127.5	997.7	455.0		
	H46	21	0.439	19,123.5	8,395.2			718.2	315.3	279.5	122.7	997.7	438.0		
	H47	22	0.422	19,300.5	8,144.8			718.2	303.1	279.5	117.9	997.7	421.0		
	H48	23	0.406	19,477.5	7,907.9			668.1	271.2	275.4	111.8	943.5	383.0		
	H49	24	0.390	19,642.1	7,660.4			668.1	260.6	275.4	107.4	943.5	368.0		
	H50	25	0.375	19,806.7	7,427.5			668.1	250.5	275.4	103.3	943.5	353.8		
	H51	26	0.361	19,971.3	7,209.6			668.1	241.2	275.4	99.4	943.5	340.6		
	H52	27	0.347	20,135.9	6,987.2			668.1	231.8	275.4	95.6	943.5	327.4		
	H53	28	0.333	20,300.6	6,760.1			544.7	181.4	265.6	88.4	810.3	269.8		
	H54	29	0.321	20,434.8	6,559.6			421.3	135.2	255.7	82.1	677.0	217.3		
	H55	30	0.308	20,538.6	6,325.9			421.3	129.8	255.7	78.8	677.0	208.6		
	H56	31	0.296	20,642.4	6,110.2			421.3	124.7	255.7	75.7	677.0	200.4		
	H57	32	0.285	20,746.3	5,912.7			421.3	120.1	255.7	72.9	677.0	193.0		
	H58	33	0.274	20,850.1	5,712.9			421.3	115.4	255.7	70.1	677.0	185.5		
施設完成後の評価期間（５０年）	H59	34	0.264	20,953.9	5,531.8					325.7	86.0	325.7	86.0		
	H60	35	0.253	20,953.9	5,301.3					325.7	82.4	325.7	82.4		
	H61	36	0.244	20,953.9	5,112.8					325.7	79.5	325.7	79.5		
	H62	37	0.234	20,953.9	4,903.2					325.7	76.2	325.7	76.2		
	H63	38	0.225	20,953.9	4,714.6					325.7	73.3	325.7	73.3		
	H64	39	0.217	20,953.9	4,547.0					325.7	70.7	325.7	70.7		
	H65	40	0.208	20,953.9	4,358.4					325.7	67.7	325.7	67.7		
	H66	41	0.200	20,953.9	4,190.8					325.7	65.1	325.7	65.1		
	H67	42	0.193	20,953.9	4,044.1					325.7	62.9	325.7	62.9		
	H68	43	0.185	20,953.9	3,876.5					325.7	60.3	325.7	60.3		
	H69	44	0.178	20,953.9	3,729.8					325.7	58.0	325.7	58.0		
	H70	45	0.171	20,953.9	3,583.1					325.7	55.7	325.7	55.7		
	H71	46	0.165	20,953.9	3,457.4					325.7	53.7	325.7	53.7		
	H72	47	0.158	20,953.9	3,310.7					325.7	51.5	325.7	51.5		
	H73	48	0.152	20,953.9	3,185.0					325.7	49.5	325.7	49.5		
	H74	49	0.146	20,953.9	3,059.3					325.7	47.6	325.7	47.6		
	H75	50	0.141	20,953.9	2,954.5					325.7	45.9	325.7	45.9		
	H76	51	0.135	20,953.9	2,828.8					325.7	44.0	325.7	44.0		
	H77	52	0.130	20,953.9	2,724.0					325.7	42.3	325.7	42.3		
	H78	53	0.125	20,953.9	2,619.2					325.7	40.7	325.7	40.7		
	H79	54	0.120	20,953.9	2,514.5					325.7	39.1	325.7	39.1		
	H80	55	0.116	20,953.9	2,430.7					325.7	37.8	325.7	37.8		
	H81	56	0.111	20,953.9	2,325.9					325.7	36.2	325.7	36.2		
	H82	57	0.107	20,953.9	2,242.1					325.7	34.8	325.7	34.8		
	H83	58	0.103	20,953.9	2,158.3					325.7	33.5	325.7	33.5		
	H84	59	0.099	20,953.9	2,074.4					325.7	32.2	325.7	32.2		
	H85	60	0.095	20,953.9	1,990.6					325.7	30.9	325.7	30.9		
	H86	61	0.091	20,953.9	1,906.8					325.7	29.6	325.7	29.6		
	H87	62	0.088	20,953.9	1,843.9					325.7	28.7	325.7	28.7		
	H88	63	0.085	20,953.9	1,781.1					325.7	27.7	325.7	27.7		
	H89	64	0.081	20,953.9	1,697.3					325.7	26.4	325.7	26.4		
	H90	65	0.078	20,953.9	1,634.4					325.7	25.4	325.7	25.4		
	H91	66	0.075	20,953.9	1,571.5					325.7	24.4	325.7	24.4		
	H92	67	0.072	20,953.9	1,508.7					325.7	23.5	325.7	23.5		
	H93	68	0.069	20,953.9	1,445.8					325.7	22.5	325.7	22.5		
	H94	69	0.067	20,953.9	1,403.9					325.7	21.8	325.7	21.8		
	H95	70	0.064	20,953.9	1,341.0					325.7	20.8	325.7	20.8		
	H96	71	0.062	20,953.9	1,299.1					325.7	20.2	325.7	20.2		
	H97	72	0.059	20,953.9	1,236.3					325.7	19.2	325.7	19.2		
	H98	73	0.057	20,953.9	1,194.4					325.7	18.6	325.7	18.6		
	H99	74	0.055	20,953.9	1,152.5					325.7	17.9	325.7	17.9		
	H100	75	0.053	20,953.9	1,110.6					325.7	17.3	325.7	17.3		
	H101	76	0.051	20,953.9	1,068.6					325.7	16.6	325.7	16.6		
	H102	77	0.049	20,953.9	1,026.7					325.7	16.0	325.7	16.0		
	H103	78	0.047	20,953.9	984.8					325.7	15.3	325.7	15.3		
	H104	79	0.045	20,953.9	942.										

様式－５ 費用対便益（全体事業・工期-10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	割引率 4%	便 益 (B)			残存価値 ②	計 ①+②	費 用 (C)						費用便益比 B/C	純現在価値 B-C
				便益①		建設費③			維持管理費④		計③+④					
				便益	現在価値				費用	現在価値		費用	現在価値			
整備期間（38年）	H15	-10	1.480	0.0	0.0			2,071.0	3,195.0	443.0	683.4	2,514.0	3,878.4			
	H16	-9	1.423	-14.6	-20.8			6,058.0	8,949.8	444.0	655.9	6,502.0	9,605.7			
	H17	-8	1.369	-32.8	-44.9			3,006.0	4,251.0	419.9	593.8	3,425.9	4,844.8			
	H18	-7	1.316	-47.7	-62.8			4,194.0	5,639.4	475.2	639.0	4,669.2	6,278.4			
	H19	-6	1.265	-64.3	-81.3			6,677.0	8,495.8	498.2	633.9	7,175.2	9,129.7			
	H20	-5	1.217	-95.8	-116.6			7,494.3	8,905.0	441.9	525.1	7,936.2	9,430.1			
	H21	-4	1.170	-125.4	-146.7			5,855.0	6,903.8	455.0	536.5	6,310.0	7,440.3			
	H22	-3	1.125	-140.2	-157.7			6,850.8	7,805.4	342.8	390.6	7,193.6	8,196.0			
	H23	-2	1.082	-153.2	-165.8			7,002.0	7,576.2	916.0	991.1	7,918.0	8,567.3			
	H24	-1	1.040	-159.9	-166.3			13,413.3	13,949.8	581.5	604.8	13,994.8	14,554.6			
	H25	0	1.000	-155.7	-155.7			6,199.3	6,199.3	294.7	294.7	6,494.0	6,494.0			
	H26	1	0.962	-97.9	-94.2			10,224.6	9,836.1	518.5	498.8	10,743.1	10,334.9			
	H27	2	0.925	345.3	319.4			6,632.0	6,134.6	360.7	333.6	6,992.7	6,468.2			
	H28	3	0.889	1,222.8	1,087.0			8,352.5	7,425.4	576.7	512.7	8,929.2	7,938.1			
	H29	4	0.855	1,977.9	1,691.1			8,834.5	7,553.5	648.2	554.2	9,482.7	8,107.7			
	H30	5	0.822	2,807.0	2,307.3			10,147.0	8,340.8	812.3	667.7	10,959.3	9,008.5			
	H31	6	0.790	3,871.3	3,058.3			7,369.9	5,822.2	592.8	468.3	7,962.7	6,290.5			
	H32	7	0.760	4,281.5	3,253.9			5,355.1	4,069.9	433.0	329.1	5,788.1	4,399.0			
	H33	8	0.731	4,146.2	3,030.8			1,836.8	1,342.7	150.3	109.9	1,987.1	1,452.6			
	H34	9	0.703	5,975.4	4,200.7			957.0	672.8	79.5	55.9	1,036.5	728.7			
	H35	10	0.676	8,253.4	5,579.3			952.2	643.7	79.5	53.7	1,031.7	697.4			
	H36	11	0.650	10,531.3	6,845.3			910.3	591.7	79.5	51.7	989.8	643.4			
	H37	12	0.625	12,808.9	8,005.6			910.2	568.9	79.5	49.7	989.7	618.6			
	H38	13	0.601	15,086.6	9,067.0			910.2	547.0	79.5	47.8	989.7	594.8			
	H39	14	0.577	17,364.3	10,019.2			894.1	515.9	79.5	45.9	973.6	561.8			
	H40	15	0.555	18,612.3	10,329.8			877.8	487.2	319.0	177.0	1,196.8	664.2			
	H41	16	0.534	18,828.5	10,054.4			877.8	468.7	319.0	170.3	1,196.8	639.0			
	H42	17	0.513	19,044.8	9,770.0			877.8	450.3	319.0	163.6	1,196.8	613.9			
	H43	18	0.494	19,261.2	9,515.0			877.8	433.6	319.0	157.6	1,196.8	591.2			
	H44	19	0.475	19,477.5	9,251.8			816.5	387.8	314.1	149.2	1,130.6	537.0			
	H45	20	0.456	19,678.7	8,973.5			816.5	372.3	314.1	143.2	1,130.6	515.5			
	H46	21	0.439	19,879.8	8,727.3			816.6	358.5	314.1	137.9	1,130.7	496.4			
	H47	22	0.422	20,081.1	8,474.2			816.6	344.6	314.1	132.6	1,130.7	477.2			
	H48	23	0.406	20,282.3	8,234.6			665.7	270.3	302.1	122.7	967.8	393.0			
	H49	24	0.390	20,446.3	7,974.1			514.9	200.8	290.0	113.1	804.9	313.9			
	H50	25	0.375	20,573.2	7,715.0			514.9	193.1	290.0	108.8	804.9	301.9			
	H51	26	0.361	20,700.1	7,472.7			514.9	185.9	290.0	104.7	804.9	290.6			
	H52	27	0.347	20,827.0	7,227.0			514.9	178.7	290.0	100.6	804.9	279.3			
施設完成後の評価期間（50年）	H53	28	0.333	20,953.9	6,977.6					368.9	122.8	368.9	122.8			
	H54	29	0.321	20,953.9	6,726.2					368.9	118.4	368.9	118.4			
	H55	30	0.308	20,953.9	6,453.8					368.9	113.6	368.9	113.6			
	H56	31	0.296	20,953.9	6,202.4					368.9	109.2	368.9	109.2			
	H57	32	0.285	20,953.9	5,971.9					368.9	105.1	368.9	105.1			
	H58	33	0.274	20,953.9	5,741.4					368.9	101.1	368.9	101.1			
	H59	34	0.264	20,953.9	5,531.8					368.9	97.4	368.9	97.4			
	H60	35	0.253	20,953.9	5,301.3					368.9	93.3	368.9	93.3			
	H61	36	0.244	20,953.9	5,112.8					368.9	90.0	368.9	90.0			
	H62	37	0.234	20,953.9	4,903.2					368.9	86.3	368.9	86.3			
	H63	38	0.225	20,953.9	4,714.6					368.9	83.0	368.9	83.0			
	H64	39	0.217	20,953.9	4,547.0					368.9	80.1	368.9	80.1			
	H65	40	0.208	20,953.9	4,358.4					368.9	76.7	368.9	76.7			
	H66	41	0.200	20,953.9	4,190.8					368.9	73.8	368.9	73.8			
	H67	42	0.193	20,953.9	4,044.1					368.9	71.2	368.9	71.2			
	H68	43	0.185	20,953.9	3,876.5					368.9	68.2	368.9	68.2			
	H69	44	0.178	20,953.9	3,729.8					368.9	65.7	368.9	65.7			
	H70	45	0.171	20,953.9	3,583.1					368.9	63.1	368.9	63.1			
	H71	46	0.165	20,953.9	3,457.4					368.9	60.9	368.9	60.9			
	H72	47	0.158	20,953.9	3,310.7					368.9	58.3	368.9	58.3			
	H73	48	0.152	20,953.9	3,185.0					368.9	56.1	368.9	56.1			
	H74	49	0.146	20,953.9	3,059.3					368.9	53.9	368.9	53.9			
	H75	50	0.141	20,953.9	2,954.5					368.9	52.0	368.9	52.0			
	H76	51	0.135	20,953.9	2,828.8					368.9	49.8	368.9	49.8			
	H77	52	0.130	20,953.9	2,724.0					368.9	48.0	368.9	48.0			
	H78	53	0.125	20,953.9	2,619.2					368.9	46.1	368.9	46.1			
	H79	54	0.120	20,953.9	2,514.5					368.9	44.3	368.9	44.3			
	H80	55	0.116	20,953.9	2,430.7					368.9	42.8	368.9	42.8			
	H81	56	0.111	20,953.9	2,325.9					368.9	40.9	368.9	40.9			
	H82	57	0.107	20,953.9	2,242.1					368.9	39.5	368.9	39.5			
	H83	58	0.103	20,953.9	2,158.3					368.9	38.0	368.9	38.0			
	H84	59	0.099	20,953.9	2,074.4					368.9	36.5	368.9	36.5			
	H85	60	0.095	20,953.9	1,990.6					368.9	35.0	368.9	35.0			
	H86	61	0.091	20,953.9	1,906.8					368.9	33.6	368.9	33.6			
	H87	62	0.088	20,953.9	1,843.9					368.9	32.5	368.9	32.5			
	H88	63	0.085	20,953.9	1,781.1					368.9	31.4	368.9	31.4			
	H89	64	0.081	20,953.9	1,697.3					368.9	29.9	368.9	29.9			
	H90	65	0.078	20,953.9	1,634.4					368.9	28.8	368.9	28.8			
	H91	66	0.075	20,953.9	1,571.5					368.9	27.7	368.9	27.7			
	H92	67	0.072	20,953.9	1,508.7					368.9	26.6	368.9	26.6			
	H93	68	0.069	20,953.9	1,445.8					368.9	25.5	368.9	25.5			
	H94	69	0.067	20,953.9	1,403.9					368.9	24.7	368.9	24.7			
	H95	70	0.064	20,953.9	1,341.0					368.9	23.6	368.9	23.6			
	H96	71	0.062	20,953.9	1,299.1					368.9	22.9	368.9	22.9			
	H97	72	0.059	20,953.9	1,236.3					368.9	21.8	368.9	21.8			
	H98	73	0.057	20,953.9	1,194.4					368.9	21.0	368.9	21.0			
	H99	74	0.055	20,953.9	1,152.5					368.9	20.3	368.9	20.3			
	H100	75	0.053	20,953.9	1,110.6					368.9	19.6	368.9	19.6			
	H101	76	0.051	20,953.9	1,068.6					368.9	18.8	368.9	18.8			

様式－５ 費用対便益（全体事業・資産+10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			残存価値 (2)	計 ①+②	建設費③		費 用 (C)		計③+④		費用便益比 B / C	純現在価値 B - C
				便益①		現在価値			費用	現在価値	費用	現在価値				
				0.04	便益											
整備期間 (41年)	H15	-10	1.480	0.0	0.0			2,071.0	3,195.0	443.0	683.4	2,514.0	3,878.4			
	H16	-9	1.423	-16.0	-22.8			6,058.0	8,949.8	444.0	655.9	6,502.0	9,605.7			
	H17	-8	1.369	-36.1	-49.4			3,006.0	4,251.0	419.9	593.8	3,425.9	4,844.8			
	H18	-7	1.316	-52.4	-69.0			4,194.0	5,639.4	475.2	639.0	4,669.2	6,278.4			
	H19	-6	1.265	-70.6	-89.3			6,677.0	8,495.8	498.2	633.9	7,175.2	9,129.7			
	H20	-5	1.217	-105.3	-128.2			7,494.3	8,905.0	441.9	525.1	7,936.2	9,430.1			
	H21	-4	1.170	-137.8	-161.2			5,855.0	6,903.8	455.0	536.5	6,310.0	7,440.3			
	H22	-3	1.125	-154.0	-173.3			6,850.8	7,805.4	342.8	390.6	7,193.6	8,196.0			
	H23	-2	1.082	-168.3	-182.1			7,002.0	7,576.2	916.0	991.1	7,918.0	8,567.3			
	H24	-1	1.040	-175.6	-182.6			13,413.3	13,949.8	581.5	604.8	13,994.8	14,554.6			
	H25	0	1.000	-171.0	-171.0			6,199.3	6,199.3	294.7	294.7	6,494.0	6,494.0			
	H26	1	0.962	-107.5	-103.4			9,606.8	9,241.7	489.0	470.4	10,095.8	9,712.1			
	H27	2	0.925	279.8	258.8			5,559.9	5,142.9	274.6	254.0	5,834.5	5,396.9			
	H28	3	0.889	1,168.9	1,039.2			7,604.7	6,760.6	529.4	470.6	8,134.1	7,231.2			
	H29	4	0.855	1,944.0	1,662.1			7,313.1	6,252.7	498.0	425.8	7,811.1	6,678.5			
	H30	5	0.822	2,619.9	2,153.6			8,907.9	7,322.3	713.6	586.6	9,621.5	7,908.9			
	H31	6	0.790	3,652.0	2,885.1			9,356.7	7,391.8	750.4	592.8	10,107.1	7,984.6			
	H32	7	0.760	4,784.8	3,636.4			4,817.1	3,661.0	390.4	296.7	5,207.5	3,957.7			
	H33	8	0.731	4,651.4	3,400.2			4,820.7	3,523.9	390.7	285.6	5,211.4	3,809.5			
	H34	9	0.703	4,555.4	3,202.4			861.3	605.5	72.4	50.9	933.7	656.4			
	H35	10	0.676	6,802.9	4,598.8			861.2	582.2	72.4	48.9	933.6	631.1			
	H36	11	0.650	9,050.3	5,882.7			861.2	559.8	72.4	47.1	933.6	606.9			
	H37	12	0.625	11,297.8	7,061.1			819.3	512.1	72.5	45.3	891.8	557.4			
	H38	13	0.601	13,545.0	8,140.5			819.3	492.4	72.5	43.6	891.8	536.0			
	H39	14	0.577	15,792.3	9,112.2			819.2	472.7	72.4	41.8	891.6	514.5			
	H40	15	0.555	18,039.5	10,011.9			819.2	454.7	72.4	40.2	891.6	494.9			
	H41	16	0.534	20,287.8	10,833.7			790.0	421.9	301.5	161.0	1,091.5	582.9			
	H42	17	0.513	20,501.5	10,517.3			790.0	405.3	301.5	154.7	1,091.5	560.0			
	H43	18	0.494	20,715.2	10,233.3			790.0	390.3	301.5	148.9	1,091.5	539.2			
	H44	19	0.475	20,928.9	9,941.2			790.0	375.3	301.5	143.2	1,091.5	518.5			
	H45	20	0.456	21,142.7	9,641.1			790.0	360.2	301.5	137.5	1,091.5	497.7			
	H46	21	0.439	21,356.4	9,375.5			734.9	322.6	297.1	130.4	1,032.0	453.0			
	H47	22	0.422	21,555.2	9,096.3			734.9	310.1	297.1	125.4	1,032.0	435.5			
	H48	23	0.406	21,754.0	8,832.1			734.9	298.4	297.1	120.6	1,032.0	419.0			
	H49	24	0.390	21,952.8	8,561.6			734.9	286.6	297.1	115.9	1,032.0	402.5			
	H50	25	0.375	22,151.6	8,306.9			734.9	275.6	297.1	111.4	1,032.0	387.0			
	H51	26	0.361	22,350.5	8,068.5			463.4	167.3	275.4	99.4	738.8	266.7			
	H52	27	0.347	22,475.8	7,799.1			463.4	160.8	275.4	95.6	738.8	256.4			
	H53	28	0.333	22,601.2	7,526.2			463.4	154.3	275.4	91.7	738.8	246.0			
	H54	29	0.321	22,726.6	7,295.2			463.4	148.8	275.4	88.4	738.8	237.2			
	H55	30	0.308	22,851.9	7,038.4			463.4	142.7	275.4	84.8	738.8	227.5			
施設完成後の評価期間 (50年)	H56	31	0.296	22,977.3	6,801.3					349.6	103.5	349.6	103.5			
	H57	32	0.285	22,977.3	6,548.5					349.6	99.6	349.6	99.6			
	H58	33	0.274	22,977.3	6,295.8					349.6	95.8	349.6	95.8			
	H59	34	0.264	22,977.3	6,066.0					349.6	92.3	349.6	92.3			
	H60	35	0.253	22,977.3	5,813.3					349.6	88.4	349.6	88.4			
	H61	36	0.244	22,977.3	5,606.5					349.6	85.3	349.6	85.3			
	H62	37	0.234	22,977.3	5,376.7					349.6	81.8	349.6	81.8			
	H63	38	0.225	22,977.3	5,169.9					349.6	78.7	349.6	78.7			
	H64	39	0.217	22,977.3	4,986.1					349.6	75.9	349.6	75.9			
	H65	40	0.208	22,977.3	4,779.3					349.6	72.7	349.6	72.7			
	H66	41	0.200	22,977.3	4,595.5					349.6	69.9	349.6	69.9			
	H67	42	0.193	22,977.3	4,434.6					349.6	67.5	349.6	67.5			
	H68	43	0.185	22,977.3	4,250.8					349.6	64.7	349.6	64.7			
	H69	44	0.178	22,977.3	4,090.0					349.6	62.2	349.6	62.2			
	H70	45	0.171	22,977.3	3,929.1					349.6	59.8	349.6	59.8			
	H71	46	0.165	22,977.3	3,791.3					349.6	57.7	349.6	57.7			
	H72	47	0.158	22,977.3	3,630.4					349.6	55.2	349.6	55.2			
	H73	48	0.152	22,977.3	3,492.5					349.6	53.1	349.6	53.1			
	H74	49	0.146	22,977.3	3,354.7					349.6	51.0	349.6	51.0			
	H75	50	0.141	22,977.3	3,239.8					349.6	49.3	349.6	49.3			
	H76	51	0.135	22,977.3	3,101.9					349.6	47.2	349.6	47.2			
	H77	52	0.130	22,977.3	2,987.0					349.6	45.4	349.6	45.4			
	H78	53	0.125	22,977.3	2,872.2					349.6	43.7	349.6	43.7			
	H79	54	0.120	22,977.3	2,757.3					349.6	42.0	349.6	42.0			
	H80	55	0.116	22,977.3	2,665.4					349.6	40.6	349.6	40.6			
	H81	56	0.111	22,977.3	2,550.5					349.6	38.8	349.6	38.8			
	H82	57	0.107	22,977.3	2,458.6					349.6	37.4	349.6	37.4			
	H83	58	0.103	22,977.3	2,366.7					349.6	36.0	349.6	36.0			
	H84	59	0.099	22,977.3	2,274.8					349.6	34.6	349.6	34.6			
	H85	60	0.095	22,977.3	2,182.8					349.6	33.2	349.6	33.2			
	H86	61	0.091	22,977.3	2,090.9					349.6	31.8	349.6	31.8			
	H87	62	0.088	22,977.3	2,022.0					349.6	30.8	349.6	30.8			
	H88	63	0.085	22,977.3	1,953.1					349.6	29.7	349.6	29.7			
	H89	64	0.081	22,977.3	1,861.2					349.6	28.3	349.6	28.3			
	H90	65	0.078	22,977.3	1,792.2					349.6	27.3	349.6	27.3			
	H91	66	0.075	22,977.3	1,723.3					349.6	26.2	349.6	26.2			
	H92	67	0.072	22,977.3	1,654.4					349.6	25.2	349.6	25.2			
	H93	68	0.069	22,977.3	1,585.4					349.6	24.1	349.6	24.1			
	H94	69	0.067	22,977.3	1,539.5					349.6	23.4	349.6	23.4			
	H95	70	0.064	22,977.3	1,470.5					349.6	22.4	349.6	22.4			
	H96	71	0.062	22,977.3	1,424.6					349.6	21.7	349.6	21.7			
	H97	72	0.059	22,977.3	1,355.7					349.6	20.6	349.6	20.6			
	H98	73	0.057	22,977.3	1,309.7					349.6	19.9	349.6	19.9			
	H99	74	0.055	22,977.3	1,263.8					349.6	19.2	349.6	19.2			
	H100	75	0.053	22,977.3	1,217.8					349.6	1					

様式－５ 費用対便益（全体事業・資産-10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			残存価値 (2)	計 ①+②	建設費③		費 用 (C)		計③+④		費用便益比 B／C	純現在価値 B－C
				便益①		現在価値			費用	現在価値	費用	現在価値				
				0.04	便益											
整備期間（４１年）	H15	-10	1.480	0.0	0.0			2,071.0	3,195.0	443.0	683.4	2,514.0	3,878.4			
	H16	-9	1.423	-13.2	-18.8			6,058.0	8,949.8	444.0	655.9	6,502.0	9,605.7			
	H17	-8	1.369	-29.6	-40.5			3,006.0	4,251.0	419.9	593.8	3,425.9	4,844.8			
	H18	-7	1.316	-43.0	-56.6			4,194.0	5,639.4	475.2	639.0	4,669.2	6,278.4			
	H19	-6	1.265	-58.0	-73.4			6,677.0	8,495.8	498.2	633.9	7,175.2	9,129.7			
	H20	-5	1.217	-86.5	-105.3			7,494.3	8,905.0	441.9	525.1	7,936.2	9,430.1			
	H21	-4	1.170	-113.2	-132.4			5,855.0	6,903.8	455.0	536.5	6,310.0	7,440.3			
	H22	-3	1.125	-126.5	-142.3			6,850.8	7,805.4	342.8	390.6	7,193.6	8,196.0			
	H23	-2	1.082	-138.2	-149.5			7,002.0	7,576.2	916.0	991.1	7,918.0	8,567.3			
	H24	-1	1.040	-144.2	-150.0			13,413.3	13,949.8	581.5	604.8	13,994.8	14,554.6			
	H25	0	1.000	-140.3	-140.3			6,199.3	6,199.3	294.7	294.7	6,494.0	6,494.0			
	H26	1	0.962	-88.4	-85.0			9,606.8	9,241.7	489.0	470.4	10,095.8	9,712.1			
	H27	2	0.925	230.7	213.4			5,559.9	5,142.9	274.6	254.0	5,834.5	5,396.9			
	H28	3	0.889	962.8	855.9			7,604.7	6,760.6	529.4	470.6	8,134.1	7,231.2			
	H29	4	0.855	1,601.1	1,368.9			7,313.1	6,252.7	498.0	425.8	7,811.1	6,678.5			
	H30	5	0.822	2,157.8	1,773.7			8,907.9	7,322.3	713.6	586.6	9,621.5	7,908.9			
	H31	6	0.790	3,007.8	2,376.2			9,356.7	7,391.8	750.4	592.8	10,107.1	7,984.6			
	H32	7	0.760	3,940.5	2,994.8			4,817.1	3,661.0	390.4	296.7	5,207.5	3,957.7			
	H33	8	0.731	3,830.2	2,799.9			4,820.7	3,523.9	390.7	285.6	5,211.4	3,809.5			
	H34	9	0.703	3,750.6	2,636.7			861.3	605.5	72.4	50.9	933.7	656.4			
	H35	10	0.676	5,603.4	3,787.9			861.2	582.2	72.4	48.9	933.6	631.1			
	H36	11	0.650	7,456.3	4,846.6			861.2	559.8	72.4	47.1	933.6	606.9			
	H37	12	0.625	9,309.1	5,818.2			819.3	512.1	72.5	45.3	891.8	557.4			
	H38	13	0.601	11,161.6	6,708.1			819.3	492.4	72.5	43.6	891.8	536.0			
	H39	14	0.577	13,014.2	7,509.2			819.2	472.7	72.4	41.8	891.6	514.5			
	H40	15	0.555	14,866.8	8,251.1			819.2	454.7	72.4	40.2	891.6	494.9			
	H41	16	0.534	16,720.3	8,928.6			790.0	421.9	301.5	161.0	1,091.5	582.9			
	H42	17	0.513	16,896.0	8,667.6			790.0	405.3	301.5	154.7	1,091.5	560.0			
	H43	18	0.494	17,071.6	8,433.4			790.0	390.3	301.5	148.9	1,091.5	539.2			
	H44	19	0.475	17,247.2	8,192.4			790.0	375.3	301.5	143.2	1,091.5	518.5			
	H45	20	0.456	17,422.9	7,944.8			790.0	360.2	301.5	137.5	1,091.5	497.7			
	H46	21	0.439	17,598.5	7,725.7			734.9	322.6	297.1	130.4	1,032.0	453.0			
	H47	22	0.422	17,761.9	7,495.5			734.9	310.1	297.1	125.4	1,032.0	435.5			
	H48	23	0.406	17,925.3	7,277.7			734.9	298.4	297.1	120.6	1,032.0	419.0			
	H49	24	0.390	18,088.6	7,054.6			734.9	286.6	297.1	115.9	1,032.0	402.5			
	H50	25	0.375	18,252.0	6,844.5			734.9	275.6	297.1	111.4	1,032.0	387.0			
	H51	26	0.361	18,415.4	6,648.0			463.4	167.3	275.4	99.4	738.8	266.7			
	H52	27	0.347	18,518.4	6,425.9			463.4	160.8	275.4	95.6	738.8	256.4			
	H53	28	0.333	18,621.4	6,200.9			463.4	154.3	275.4	91.7	738.8	246.0			
	H54	29	0.321	18,724.5	6,010.6			463.4	148.8	275.4	88.4	738.8	237.2			
	H55	30	0.308	18,827.5	5,798.9			463.4	142.7	275.4	84.8	738.8	227.5			
施設完成後の評価期間（５０年）	H56	31	0.296	18,930.5	5,603.4					349.6	103.5	349.6	103.5			
	H57	32	0.285	18,930.5	5,395.2					349.6	99.6	349.6	99.6			
	H58	33	0.274	18,930.5	5,187.0					349.6	95.8	349.6	95.8			
	H59	34	0.264	18,930.5	4,997.7					349.6	92.3	349.6	92.3			
	H60	35	0.253	18,930.5	4,789.4					349.6	88.4	349.6	88.4			
	H61	36	0.244	18,930.5	4,619.0					349.6	85.3	349.6	85.3			
	H62	37	0.234	18,930.5	4,429.7					349.6	81.8	349.6	81.8			
	H63	38	0.225	18,930.5	4,259.4					349.6	78.7	349.6	78.7			
	H64	39	0.217	18,930.5	4,107.9					349.6	75.9	349.6	75.9			
	H65	40	0.208	18,930.5	3,937.5					349.6	72.7	349.6	72.7			
	H66	41	0.200	18,930.5	3,786.1					349.6	69.9	349.6	69.9			
	H67	42	0.193	18,930.5	3,653.6					349.6	67.5	349.6	67.5			
	H68	43	0.185	18,930.5	3,502.1					349.6	64.7	349.6	64.7			
	H69	44	0.178	18,930.5	3,369.6					349.6	62.2	349.6	62.2			
	H70	45	0.171	18,930.5	3,237.1					349.6	59.8	349.6	59.8			
	H71	46	0.165	18,930.5	3,123.5					349.6	57.7	349.6	57.7			
	H72	47	0.158	18,930.5	2,991.0					349.6	55.2	349.6	55.2			
	H73	48	0.152	18,930.5	2,877.4					349.6	53.1	349.6	53.1			
	H74	49	0.146	18,930.5	2,763.9					349.6	51.0	349.6	51.0			
	H75	50	0.141	18,930.5	2,669.2					349.6	49.3	349.6	49.3			
	H76	51	0.135	18,930.5	2,555.6					349.6	47.2	349.6	47.2			
	H77	52	0.130	18,930.5	2,461.0					349.6	45.4	349.6	45.4			
	H78	53	0.125	18,930.5	2,366.3					349.6	43.7	349.6	43.7			
	H79	54	0.120	18,930.5	2,271.7					349.6	42.0	349.6	42.0			
	H80	55	0.116	18,930.5	2,195.9					349.6	40.6	349.6	40.6			
	H81	56	0.111	18,930.5	2,101.3					349.6	38.8	349.6	38.8			
	H82	57	0.107	18,930.5	2,025.6					349.6	37.4	349.6	37.4			
	H83	58	0.103	18,930.5	1,949.8					349.6	36.0	349.6	36.0			
	H84	59	0.099	18,930.5	1,874.1					349.6	34.6	349.6	34.6			
	H85	60	0.095	18,930.5	1,798.4					349.6	33.2	349.6	33.2			
	H86	61	0.091	18,930.5	1,722.7					349.6	31.8	349.6	31.8			
	H87	62	0.088	18,930.5	1,665.9					349.6	30.8	349.6	30.8			
	H88	63	0.085	18,930.5	1,609.1					349.6	29.7	349.6	29.7			
	H89	64	0.081	18,930.5	1,533.4					349.6	28.3	349.6	28.3			
	H90	65	0.078	18,930.5	1,476.6					349.6	27.3	349.6	27.3			
	H91	66	0.075	18,930.5	1,419.8					349.6	26.2	349.6	26.2			
	H92	67	0.072	18,930.5	1,363.0					349.6	25.2	349.6	25.2			
	H93	68	0.069	18,930.5	1,306.2					349.6	24.1	349.6	24.1			
	H94	69	0.067	18,930.5	1,268.3					349.6	23.4	349.6	23.4			
	H95	70	0.064	18,930.5	1,211.6					349.6	22.4	349.6	22.4			
	H96	71	0.062	18,930.5	1,173.7					349.6	21.7	349.6	21.7			
H97	72	0.059	18,930.5	1,116.9					349.6	20.6	349.6	20.6				
H98	73	0.057	18,930.5	1,079.0					349.6	19.9	349.6	19.9				
H99	74	0.055	18,930.5	1,041.2					349.6	19.2	349.6	19.2				
H100	75	0.053	18,930.5	1,003.3					349.6	18.5	349.6					

様式－５ 費用対便益（残事業）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	割引率 4%	便 益 (B)			費 用 (C)						費用便益比 B/C	純現在価値 B－C	
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用			現在価値
整備期間（30年）	H26	1	0.962	0.0	0.0			9,606.8	9,241.7	489.0	470.4	10,095.8	9,712.1		
	H27	2	0.925	353.1	326.6			5,559.9	5,142.9	274.6	254.0	5,834.5	5,396.9		
	H28	3	0.889	1,163.6	1,034.4			7,604.7	6,760.6	529.4	470.6	8,134.1	7,231.2		
	H29	4	0.855	1,870.4	1,599.2			7,313.1	6,252.7	498.0	425.8	7,811.1	6,678.5		
	H30	5	0.822	2,486.6	2,044.0			8,907.9	7,322.3	713.6	586.6	9,621.5	7,908.9		
	H31	6	0.790	3,427.7	2,707.9			9,356.7	7,391.8	750.4	592.8	10,107.1	7,984.6		
	H32	7	0.760	4,460.6	3,390.1			4,817.1	3,661.0	390.4	296.7	5,207.5	3,957.7		
	H33	8	0.731	4,338.8	3,171.7			4,820.7	3,523.9	390.7	285.6	5,211.4	3,809.5		
	H34	9	0.703	4,251.0	2,988.5			861.3	605.5	72.4	50.9	933.7	656.4		
	H35	10	0.676	6,301.1	4,259.5			861.2	582.2	72.4	48.9	933.6	631.1		
	H36	11	0.650	8,351.3	5,428.3			861.2	559.8	72.4	47.1	933.6	606.9		
	H37	12	0.625	10,401.4	6,500.9			819.3	512.1	72.5	45.3	891.8	557.4		
	H38	13	0.601	12,451.3	7,483.2			819.3	492.4	72.5	43.6	891.8	536.0		
	H39	14	0.577	14,501.2	8,367.2			819.2	472.7	72.4	41.8	891.6	514.5		
	H40	15	0.555	16,551.1	9,185.9			819.2	454.7	72.4	40.2	891.6	494.9		
	H41	16	0.534	18,602.0	9,933.5			790.0	421.9	221.8	118.4	1,011.8	540.3		
	H42	17	0.513	18,796.7	9,642.7			790.0	405.3	221.8	113.8	1,011.8	519.1		
	H43	18	0.494	18,991.3	9,381.7			790.0	390.3	221.8	109.6	1,011.8	499.9		
	H44	19	0.475	19,186.0	9,113.4			790.0	375.3	221.8	105.4	1,011.8	480.7		
	H45	20	0.456	19,380.7	8,837.6			790.0	360.2	221.8	101.1	1,011.8	461.3		
	H46	21	0.439	19,575.4	8,593.6			734.9	322.6	217.4	95.4	952.3	418.0		
	H47	22	0.422	19,756.5	8,337.2			734.9	310.1	217.4	91.7	952.3	401.8		
	H48	23	0.406	19,937.5	8,094.6			734.9	298.4	217.4	88.3	952.3	386.7		
	H49	24	0.390	20,118.6	7,846.3			734.9	286.6	217.4	84.8	952.3	371.4		
	H50	25	0.375	20,299.7	7,612.4			734.9	275.6	217.4	81.5	952.3	357.1		
	H51	26	0.361	20,480.8	7,393.6			463.4	167.3	195.7	70.6	659.1	237.9		
	H52	27	0.347	20,595.0	7,146.5			463.4	160.8	195.7	67.9	659.1	228.7		
	H53	28	0.333	20,709.2	6,896.2			463.4	154.3	195.7	65.2	659.1	219.5		
	H54	29	0.321	20,823.4	6,684.3			463.4	148.8	195.7	62.8	659.1	211.6		
	H55	30	0.308	20,937.6	6,448.8			463.4	142.7	195.7	60.3	659.1	203.0		
施設完成後の評価期間（50年）	H56	31	0.296	21,051.8	6,231.3					257.6	76.2	257.6	76.2		
	H57	32	0.285	21,051.8	5,999.8					257.6	73.4	257.6	73.4		
	H58	33	0.274	21,051.8	5,768.2					257.6	70.6	257.6	70.6		
	H59	34	0.264	21,051.8	5,557.7					257.6	68.0	257.6	68.0		
	H60	35	0.253	21,051.8	5,326.1					257.6	65.2	257.6	65.2		
	H61	36	0.244	21,051.8	5,136.6					257.6	62.9	257.6	62.9		
	H62	37	0.234	21,051.8	4,926.1					257.6	60.3	257.6	60.3		
	H63	38	0.225	21,051.8	4,736.7					257.6	58.0	257.6	58.0		
	H64	39	0.217	21,051.8	4,568.2					257.6	55.9	257.6	55.9		
	H65	40	0.208	21,051.8	4,378.8					257.6	53.6	257.6	53.6		
	H66	41	0.200	21,051.8	4,210.4					257.6	51.5	257.6	51.5		
	H67	42	0.193	21,051.8	4,063.0					257.6	49.7	257.6	49.7		
	H68	43	0.185	21,051.8	3,894.6					257.6	47.7	257.6	47.7		
	H69	44	0.178	21,051.8	3,747.2					257.6	45.9	257.6	45.9		
	H70	45	0.171	21,051.8	3,599.9					257.6	44.0	257.6	44.0		
	H71	46	0.165	21,051.8	3,473.5					257.6	42.5	257.6	42.5		
	H72	47	0.158	21,051.8	3,326.2					257.6	40.7	257.6	40.7		
	H73	48	0.152	21,051.8	3,199.9					257.6	39.2	257.6	39.2		
	H74	49	0.146	21,051.8	3,073.6					257.6	37.6	257.6	37.6		
	H75	50	0.141	21,051.8	2,968.3					257.6	36.3	257.6	36.3		
	H76	51	0.135	21,051.8	2,842.0					257.6	34.8	257.6	34.8		
	H77	52	0.130	21,051.8	2,736.7					257.6	33.5	257.6	33.5		
	H78	53	0.125	21,051.8	2,631.5					257.6	32.2	257.6	32.2		
	H79	54	0.120	21,051.8	2,526.2					257.6	30.9	257.6	30.9		
	H80	55	0.116	21,051.8	2,442.0					257.6	29.9	257.6	29.9		
	H81	56	0.111	21,051.8	2,336.7					257.6	28.6	257.6	28.6		
	H82	57	0.107	21,051.8	2,252.5					257.6	27.6	257.6	27.6		
	H83	58	0.103	21,051.8	2,168.3					257.6	26.5	257.6	26.5		
	H84	59	0.099	21,051.8	2,084.1					257.6	25.5	257.6	25.5		
	H85	60	0.095	21,051.8	1,999.9					257.6	24.5	257.6	24.5		
	H86	61	0.091	21,051.8	1,915.7					257.6	23.4	257.6	23.4		
	H87	62	0.088	21,051.8	1,852.6					257.6	22.7	257.6	22.7		
	H88	63	0.085	21,051.8	1,789.4					257.6	21.9	257.6	21.9		
	H89	64	0.081	21,051.8	1,705.2					257.6	20.9	257.6	20.9		
	H90	65	0.078	21,051.8	1,642.0					257.6	20.1	257.6	20.1		
	H91	66	0.075	21,051.8	1,578.9					257.6	19.3	257.6	19.3		
	H92	67	0.072	21,051.8	1,515.7					257.6	18.5	257.6	18.5		
	H93	68	0.069	21,051.8	1,452.6					257.6	17.8	257.6	17.8		
	H94	69	0.067	21,051.8	1,410.5					257.6	17.3	257.6	17.3		
	H95	70	0.064	21,051.8	1,347.3					257.6	16.5	257.6	16.5		
	H96	71	0.062	21,051.8	1,305.2					257.6	16.0	257.6	16.0		
	H97	72	0.059	21,051.8	1,242.1					257.6	15.2	257.6	15.2		
	H98	73	0.057	21,051.8	1,200.0					257.6	14.7	257.6	14.7		
	H99	74	0.055	21,051.8	1,157.8					257.6	14.2	257.6	14.2		
	H100	75	0.053	21,051.8	1,115.7					257.6	13.7	257.6	13.7		
	H101	76	0.051	21,051.8	1,073.6					257.6	13.1	257.6	13.1		
	H102	77	0.049	21,051.8	1,031.5					257.6	12.6	257.6	12.6		
	H103	78	0.047	21,051.8	989.4					257.6	12.1	257.6	12.1		
	H104	79	0.045	21,051.8	947.3					257.6	11.6	257.6	11.6		
	H105	80	0.043	21,051.8	905.2					257.6	11.1	257.6	11.1		
合 計				1,441,689.6	319,833.5	323.4	320,156.9	73,789.1	57,196.5	20,597.6	6,723.0	94,386.7	63,919.5	5.01	256,237.4

様式－５ 費用対便益（残事業・残事業費+10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			費 用 (C)						費用便益比 B／C	純現在価値 B－C	
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				費用	現在価値			費用	現在価値	費用	現在価値				
整備期間（30年）	H26	1	0.962	0.0	0.0			10,567.5	10,165.9	537.9	517.5	11,105.4	10,683.4		
	H27	2	0.925	353.1	326.6			6,115.9	5,657.2	302.1	279.4	6,418.0	5,936.6		
	H28	3	0.889	1,163.6	1,034.4			8,365.2	7,436.6	582.3	517.7	8,947.5	7,954.3		
	H29	4	0.855	1,870.4	1,599.2			8,044.4	6,878.0	547.8	468.4	8,592.2	7,346.4		
	H30	5	0.822	2,486.6	2,044.0			9,798.7	8,054.5	784.9	645.2	10,583.6	8,699.7		
	H31	6	0.790	3,427.7	2,707.9			10,292.4	8,131.0	825.4	652.1	11,117.8	8,783.1		
	H32	7	0.760	4,460.6	3,390.1			5,298.8	4,027.1	429.3	326.3	5,728.1	4,353.4		
	H33	8	0.731	4,338.8	3,171.7			5,302.8	3,876.3	429.6	314.0	5,732.4	4,190.3		
	H34	9	0.703	4,251.0	2,988.5			947.4	666.0	79.8	56.1	1,027.2	722.1		
	H35	10	0.676	6,301.1	4,259.5			947.3	640.4	79.7	53.9	1,027.0	694.3		
	H36	11	0.650	8,351.3	5,428.3			947.3	615.8	79.7	51.8	1,027.0	667.6		
	H37	12	0.625	10,401.4	6,500.9			901.2	563.3	79.7	49.8	980.9	613.1		
	H38	13	0.601	12,451.3	7,483.2			901.2	541.6	79.7	47.9	980.9	589.5		
	H39	14	0.577	14,501.2	8,367.2			901.1	519.9	79.7	46.0	980.8	565.9		
	H40	15	0.555	16,551.1	9,185.9			901.1	500.1	79.7	44.2	980.8	544.3		
	H41	16	0.534	18,602.0	9,933.5			869.0	464.0	243.9	130.2	1,112.9	594.2		
	H42	17	0.513	18,796.7	9,642.7			869.0	445.8	243.9	125.1	1,112.9	570.9		
	H43	18	0.494	18,991.3	9,381.7			869.0	429.3	243.9	120.5	1,112.9	549.8		
	H44	19	0.475	19,186.0	9,113.4			869.0	412.8	243.9	115.9	1,112.9	528.7		
	H45	20	0.456	19,380.7	8,837.6			869.0	396.3	243.9	111.2	1,112.9	507.5		
	H46	21	0.439	19,575.4	8,593.6			808.4	354.9	239.1	105.0	1,047.5	459.9		
	H47	22	0.422	19,756.5	8,337.2			808.4	341.1	239.1	100.9	1,047.5	442.0		
	H48	23	0.406	19,937.5	8,094.6			808.4	328.2	239.1	97.1	1,047.5	425.3		
	H49	24	0.390	20,118.6	7,846.3			808.4	315.3	239.1	93.2	1,047.5	408.5		
	H50	25	0.375	20,299.7	7,612.4			808.4	303.1	239.1	89.7	1,047.5	392.8		
	H51	26	0.361	20,480.8	7,393.6			509.7	184.0	215.2	77.7	724.9	261.7		
	H52	27	0.347	20,595.0	7,146.5			509.7	176.9	215.2	74.7	724.9	251.6		
	H53	28	0.333	20,709.2	6,896.2			509.7	169.7	215.2	71.7	724.9	241.4		
	H54	29	0.321	20,823.4	6,684.3			509.7	163.6	215.2	69.1	724.9	232.7		
	H55	30	0.308	20,937.6	6,448.8			509.7	157.0	215.2	66.3	724.9	223.3		
施設完成後の評価期間（50年）	H56	31	0.296	21,051.8	6,231.3					283.3	83.9	283.3	83.9		
	H57	32	0.285	21,051.8	5,999.8					283.3	80.7	283.3	80.7		
	H58	33	0.274	21,051.8	5,768.2					283.3	77.6	283.3	77.6		
	H59	34	0.264	21,051.8	5,557.7					283.3	74.8	283.3	74.8		
	H60	35	0.253	21,051.8	5,326.1					283.3	71.7	283.3	71.7		
	H61	36	0.244	21,051.8	5,136.6					283.3	69.1	283.3	69.1		
	H62	37	0.234	21,051.8	4,926.1					283.3	66.3	283.3	66.3		
	H63	38	0.225	21,051.8	4,736.7					283.3	63.7	283.3	63.7		
	H64	39	0.217	21,051.8	4,568.2					283.3	61.5	283.3	61.5		
	H65	40	0.208	21,051.8	4,378.8					283.3	58.9	283.3	58.9		
	H66	41	0.200	21,051.8	4,210.4					283.3	56.7	283.3	56.7		
	H67	42	0.193	21,051.8	4,063.0					283.3	54.7	283.3	54.7		
	H68	43	0.185	21,051.8	3,894.6					283.3	52.4	283.3	52.4		
	H69	44	0.178	21,051.8	3,747.2					283.3	50.4	283.3	50.4		
	H70	45	0.171	21,051.8	3,599.9					283.3	48.4	283.3	48.4		
	H71	46	0.165	21,051.8	3,473.5					283.3	46.7	283.3	46.7		
	H72	47	0.158	21,051.8	3,326.2					283.3	44.8	283.3	44.8		
	H73	48	0.152	21,051.8	3,199.9					283.3	43.1	283.3	43.1		
	H74	49	0.146	21,051.8	3,073.6					283.3	41.4	283.3	41.4		
	H75	50	0.141	21,051.8	2,968.3					283.3	39.9	283.3	39.9		
	H76	51	0.135	21,051.8	2,842.0					283.3	38.2	283.3	38.2		
	H77	52	0.130	21,051.8	2,736.7					283.3	36.8	283.3	36.8		
	H78	53	0.125	21,051.8	2,631.5					283.3	35.4	283.3	35.4		
	H79	54	0.120	21,051.8	2,526.2					283.3	34.0	283.3	34.0		
	H80	55	0.116	21,051.8	2,442.0					283.3	32.9	283.3	32.9		
	H81	56	0.111	21,051.8	2,336.7					283.3	31.4	283.3	31.4		
	H82	57	0.107	21,051.8	2,252.5					283.3	30.3	283.3	30.3		
	H83	58	0.103	21,051.8	2,168.3					283.3	29.2	283.3	29.2		
	H84	59	0.099	21,051.8	2,084.1					283.3	28.0	283.3	28.0		
	H85	60	0.095	21,051.8	1,999.9					283.3	26.9	283.3	26.9		
	H86	61	0.091	21,051.8	1,915.7					283.3	25.8	283.3	25.8		
	H87	62	0.088	21,051.8	1,852.6					283.3	24.9	283.3	24.9		
	H88	63	0.085	21,051.8	1,789.4					283.3	24.1	283.3	24.1		
	H89	64	0.081	21,051.8	1,705.2					283.3	22.9	283.3	22.9		
	H90	65	0.078	21,051.8	1,642.0					283.3	22.1	283.3	22.1		
	H91	66	0.075	21,051.8	1,578.9					283.3	21.2	283.3	21.2		
	H92	67	0.072	21,051.8	1,515.7					283.3	20.4	283.3	20.4		
	H93	68	0.069	21,051.8	1,452.6					283.3	19.5	283.3	19.5		
	H94	69	0.067	21,051.8	1,410.5					283.3	19.0	283.3	19.0		
	H95	70	0.064	21,051.8	1,347.3					283.3	18.1	283.3	18.1		
	H96	71	0.062	21,051.8	1,305.2					283.3	17.6	283.3	17.6		
	H97	72	0.059	21,051.8	1,242.1					283.3	16.7	283.3	16.7		
	H98	73	0.057	21,051.8	1,200.0					283.3	16.1	283.3	16.1		
	H99	74	0.055	21,051.8	1,157.8					283.3	15.6	283.3	15.6		
	H100	75	0.053	21,051.8	1,115.7					283.3	15.0	283.3	15.0		
	H101	76	0.051	21,051.8	1,073.6					283.3	14.4	283.3	14.4		
	H102	77	0.049	21,051.8	1,031.5					283.3	13.9	283.3	13.9		
	H103	78	0.047	21,051.8	989.4					283.3	13.3	283.3	13.3		
	H104	79	0.045	21,051.8	947.3					283.3	12.7	283.3	12.7		
	H105	80	0.043	21,051.8	905.2					283.3	12.2	283.3	12.2		
合 計				1,441,689.6	319,833.5	355.7	320,189.2	81,168.0	62,915.7	22,653.3	7,393.9	103,821.3	70,309.6	4.55	249,879.6

様式－５ 費用対便益（残事業・残事業費－10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			費 用 (C)						費用便益比 B／C	純現在価値 B－C	
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用			現在価値
整備期間 (3 0 年)	H26	1	0.962	0.0	0.0			8,646.1	8,317.6	440.1	423.4	9,086.2	8,741.0		
	H27	2	0.925	353.1	326.6			5,003.9	4,628.6	247.2	228.7	5,251.1	4,857.3		
	H28	3	0.889	1,163.6	1,034.4			6,844.2	6,084.5	476.4	423.5	7,320.6	6,508.0		
	H29	4	0.855	1,870.4	1,599.2			6,581.8	5,627.4	448.3	383.3	7,030.1	6,010.7		
	H30	5	0.822	2,486.6	2,044.0			8,017.1	6,590.1	642.1	527.8	8,659.2	7,117.9		
	H31	6	0.790	3,427.7	2,707.9			8,421.0	6,652.6	675.4	533.6	9,096.4	7,186.2		
	H32	7	0.760	4,460.6	3,390.1			4,335.4	3,294.9	351.3	267.0	4,686.7	3,561.9		
	H33	8	0.731	4,338.8	3,171.7			4,338.6	3,171.5	351.6	257.0	4,690.2	3,428.5		
	H34	9	0.703	4,251.0	2,988.5			775.2	544.9	65.2	45.8	840.4	590.7		
	H35	10	0.676	6,301.1	4,259.5			775.1	524.0	65.2	44.1	840.3	568.1		
	H36	11	0.650	8,351.3	5,428.3			775.1	503.8	65.2	42.4	840.3	546.2		
	H37	12	0.625	10,401.4	6,500.9			737.4	460.9	65.2	40.8	802.6	501.7		
	H38	13	0.601	12,451.3	7,483.2			737.4	443.2	65.2	39.2	802.6	482.4		
	H39	14	0.577	14,501.2	8,367.2			737.3	425.4	65.2	37.6	802.5	463.0		
	H40	15	0.555	16,551.1	9,185.9			737.3	409.2	65.2	36.2	802.5	445.4		
	H41	16	0.534	18,602.0	9,933.5			711.0	379.7	199.6	106.6	910.6	486.3		
	H42	17	0.513	18,796.7	9,642.7			711.0	364.7	199.6	102.4	910.6	467.1		
	H43	18	0.494	18,991.3	9,381.7			711.0	351.2	199.6	98.6	910.6	449.8		
	H44	19	0.475	19,186.0	9,113.4			711.0	337.7	199.6	94.8	910.6	432.5		
	H45	20	0.456	19,380.7	8,837.6			711.0	324.2	199.6	91.0	910.6	415.2		
	H46	21	0.439	19,575.4	8,593.6			661.4	290.4	195.6	85.9	857.0	376.3		
	H47	22	0.422	19,756.5	8,337.2			661.4	279.1	195.6	82.5	857.0	361.6		
	H48	23	0.406	19,937.5	8,094.6			661.4	268.5	195.6	79.4	857.0	347.9		
	H49	24	0.390	20,118.6	7,846.3			661.4	257.9	195.6	76.3	857.0	334.2		
	H50	25	0.375	20,299.7	7,612.4			661.4	248.0	195.6	73.4	857.0	321.4		
	H51	26	0.361	20,480.8	7,393.6			417.1	150.6	176.1	63.6	593.2	214.2		
	H52	27	0.347	20,595.0	7,146.5			417.1	144.7	176.1	61.1	593.2	205.8		
	H53	28	0.333	20,709.2	6,896.2			417.1	138.9	176.1	58.6	593.2	197.5		
	H54	29	0.321	20,823.4	6,684.3			417.1	133.9	176.1	56.5	593.2	190.4		
	H55	30	0.308	20,937.6	6,448.8			417.1	128.5	176.1	54.2	593.2	182.7		
施設完成後の 評価期間 (5 0 年)	H56	31	0.296	21,051.8	6,231.3					231.8	68.6	231.8	68.6		
	H57	32	0.285	21,051.8	5,999.8					231.8	66.1	231.8	66.1		
	H58	33	0.274	21,051.8	5,768.2					231.8	63.5	231.8	63.5		
	H59	34	0.264	21,051.8	5,557.7					231.8	61.2	231.8	61.2		
	H60	35	0.253	21,051.8	5,326.1					231.8	58.6	231.8	58.6		
	H61	36	0.244	21,051.8	5,136.6					231.8	56.6	231.8	56.6		
	H62	37	0.234	21,051.8	4,926.1					231.8	54.2	231.8	54.2		
	H63	38	0.225	21,051.8	4,736.7					231.8	52.2	231.8	52.2		
	H64	39	0.217	21,051.8	4,568.2					231.8	50.3	231.8	50.3		
	H65	40	0.208	21,051.8	4,378.8					231.8	48.2	231.8	48.2		
	H66	41	0.200	21,051.8	4,210.4					231.8	46.4	231.8	46.4		
	H67	42	0.193	21,051.8	4,063.0					231.8	44.7	231.8	44.7		
	H68	43	0.185	21,051.8	3,894.6					231.8	42.9	231.8	42.9		
	H69	44	0.178	21,051.8	3,747.2					231.8	41.3	231.8	41.3		
	H70	45	0.171	21,051.8	3,599.9					231.8	39.6	231.8	39.6		
	H71	46	0.165	21,051.8	3,473.5					231.8	38.2	231.8	38.2		
	H72	47	0.158	21,051.8	3,326.2					231.8	36.6	231.8	36.6		
	H73	48	0.152	21,051.8	3,199.9					231.8	35.2	231.8	35.2		
	H74	49	0.146	21,051.8	3,073.6					231.8	33.8	231.8	33.8		
	H75	50	0.141	21,051.8	2,968.3					231.8	32.7	231.8	32.7		
	H76	51	0.135	21,051.8	2,842.0					231.8	31.3	231.8	31.3		
	H77	52	0.130	21,051.8	2,736.7					231.8	30.1	231.8	30.1		
	H78	53	0.125	21,051.8	2,631.5					231.8	29.0	231.8	29.0		
	H79	54	0.120	21,051.8	2,526.2					231.8	27.8	231.8	27.8		
	H80	55	0.116	21,051.8	2,442.0					231.8	26.9	231.8	26.9		
	H81	56	0.111	21,051.8	2,336.7					231.8	25.7	231.8	25.7		
	H82	57	0.107	21,051.8	2,252.5					231.8	24.8	231.8	24.8		
	H83	58	0.103	21,051.8	2,168.3					231.8	23.9	231.8	23.9		
	H84	59	0.099	21,051.8	2,084.1					231.8	22.9	231.8	22.9		
	H85	60	0.095	21,051.8	1,999.9					231.8	22.0	231.8	22.0		
	H86	61	0.091	21,051.8	1,915.7					231.8	21.1	231.8	21.1		
	H87	62	0.088	21,051.8	1,852.6					231.8	20.4	231.8	20.4		
	H88	63	0.085	21,051.8	1,789.4					231.8	19.7	231.8	19.7		
	H89	64	0.081	21,051.8	1,705.2					231.8	18.8	231.8	18.8		
	H90	65	0.078	21,051.8	1,642.0					231.8	18.1	231.8	18.1		
	H91	66	0.075	21,051.8	1,578.9					231.8	17.4	231.8	17.4		
	H92	67	0.072	21,051.8	1,515.7					231.8	16.7	231.8	16.7		
	H93	68	0.069	21,051.8	1,452.6					231.8	16.0	231.8	16.0		
	H94	69	0.067	21,051.8	1,410.5					231.8	15.5	231.8	15.5		
	H95	70	0.064	21,051.8	1,347.3					231.8	14.8	231.8	14.8		
	H96	71	0.062	21,051.8	1,305.2					231.8	14.4	231.8	14.4		
	H97	72	0.059	21,051.8	1,242.1					231.8	13.7	231.8	13.7		
	H98	73	0.057	21,051.8	1,200.0					231.8	13.2	231.8	13.2		
	H99	74	0.055	21,051.8	1,157.8					231.8	12.7	231.8	12.7		
	H100	75	0.053	21,051.8	1,115.7					231.8	12.3	231.8	12.3		
	H101	76	0.051	21,051.8	1,073.6					231.8	11.8	231.8	11.8		
	H102	77	0.049	21,051.8	1,031.5					231.8	11.4	231.8	11.4		
	H103	78	0.047	21,051.8	989.4					231.8	10.9	231.8	10.9		
	H104	79	0.045	21,051.8	947.3					231.8	10.4	231.8	10.4		
	H105	80	0.043	21,051.8	905.2					231.8	10.0	231.8	10.0		
合 計				1,441,689.6	319,833.5	291.0	320,124.5	66,410.2	51,476.6	18,535.3	6,049.9	84,945.5	57,526.5	5.56	262,598.0

様式－５ 費用対便益（残事業・工期+10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			費 用 (C)						費用便益比 B/C	純現在価値 B－C	
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用			現在価値
整備期間（33年）	H26	1	0.962	0.0	0.0			8,733.4	8,401.5	444.6	427.7	9,178.0	8,829.2		
	H27	2	0.925	321.0	296.9			5,422.2	5,015.5	270.8	250.5	5,693.0	5,266.0		
	H28	3	0.889	1,016.2	903.4			6,541.6	5,815.5	435.8	387.4	6,977.4	6,202.9		
	H29	4	0.855	1,677.6	1,434.4			6,727.8	5,752.3	462.2	395.2	7,190.0	6,147.5		
	H30	5	0.822	2,262.5	1,859.8			7,518.2	6,180.0	571.1	469.4	8,089.3	6,649.4		
	H31	6	0.790	2,999.9	2,369.9			8,302.0	6,558.6	666.3	526.4	8,968.3	7,085.0		
	H32	7	0.760	3,870.7	2,941.8			6,855.2	5,210.0	552.1	419.6	7,407.3	5,629.6		
	H33	8	0.731	4,416.3	3,228.3			4,380.1	3,201.9	355.7	260.0	4,735.8	3,461.9		
	H34	9	0.703	4,305.6	3,026.8			3,662.5	2,574.7	298.1	209.6	3,960.6	2,784.3		
	H35	10	0.676	4,623.7	3,125.7			783.0	529.3	66.8	45.2	849.8	574.5		
	H36	11	0.650	6,487.5	4,216.9			782.9	508.9	66.8	43.4	849.7	552.3		
	H37	12	0.625	8,351.3	5,219.6			782.9	489.3	66.8	41.8	849.7	531.1		
	H38	13	0.601	10,215.0	6,139.2			748.6	449.9	66.8	40.1	815.4	490.0		
	H39	14	0.577	12,078.6	6,969.3			744.9	429.8	66.8	38.5	811.7	468.3		
	H40	15	0.555	13,942.1	7,737.9			744.8	413.4	66.8	37.1	811.6	450.5		
	H41	16	0.534	15,805.7	8,440.2			744.8	397.7	66.8	35.7	811.6	433.4		
	H42	17	0.513	17,669.2	9,064.3			731.5	375.3	66.7	34.2	798.2	409.5		
	H43	18	0.494	18,690.5	9,233.1			718.2	354.8	198.5	98.1	916.7	452.9		
	H44	19	0.475	18,867.5	8,962.0			718.2	341.1	198.5	94.3	916.7	435.4		
	H45	20	0.456	19,044.4	8,684.2			718.2	327.5	198.5	90.5	916.7	418.0		
	H46	21	0.439	19,221.4	8,438.2			718.2	315.3	198.5	87.1	916.7	402.4		
	H47	22	0.422	19,398.4	8,186.1			718.2	303.1	198.5	83.8	916.7	386.9		
	H48	23	0.406	19,575.4	7,947.6			668.1	271.2	194.4	78.9	862.5	350.1		
	H49	24	0.390	19,740.0	7,698.6			668.1	260.6	194.4	75.8	862.5	336.4		
	H50	25	0.375	19,904.6	7,464.2			668.1	250.5	194.4	72.9	862.5	323.4		
	H51	26	0.361	20,069.2	7,245.0			668.1	241.2	194.4	70.2	862.5	311.4		
	H52	27	0.347	20,233.8	7,021.1			668.1	231.8	194.4	67.5	862.5	299.3		
	H53	28	0.333	20,398.5	6,792.7			544.7	181.4	184.6	61.5	729.3	242.9		
	H54	29	0.321	20,532.7	6,591.0			421.3	135.2	174.7	56.1	596.0	191.3		
	H55	30	0.308	20,636.5	6,356.1			421.3	129.8	174.7	53.8	596.0	183.6		
	H56	31	0.296	20,740.3	6,139.1			421.3	124.7	174.7	51.7	596.0	176.4		
	H57	32	0.285	20,844.2	5,940.6			421.3	120.1	174.7	49.8	596.0	169.9		
	H58	33	0.274	20,948.0	5,739.7			421.3	115.4	174.7	47.9	596.0	163.3		
施設完成後の評価期間（50年）	H59	34	0.264	21,051.8	5,557.7					231.0	61.0	231.0	61.0		
	H60	35	0.253	21,051.8	5,326.1					231.0	58.4	231.0	58.4		
	H61	36	0.244	21,051.8	5,136.6					231.0	56.4	231.0	56.4		
	H62	37	0.234	21,051.8	4,926.1					231.0	54.1	231.0	54.1		
	H63	38	0.225	21,051.8	4,736.7					231.0	52.0	231.0	52.0		
	H64	39	0.217	21,051.8	4,568.2					231.0	50.1	231.0	50.1		
	H65	40	0.208	21,051.8	4,378.8					231.0	48.0	231.0	48.0		
	H66	41	0.200	21,051.8	4,210.4					231.0	46.2	231.0	46.2		
	H67	42	0.193	21,051.8	4,063.0					231.0	44.6	231.0	44.6		
	H68	43	0.185	21,051.8	3,894.6					231.0	42.7	231.0	42.7		
	H69	44	0.178	21,051.8	3,747.2					231.0	41.1	231.0	41.1		
	H70	45	0.171	21,051.8	3,599.9					231.0	39.5	231.0	39.5		
	H71	46	0.165	21,051.8	3,473.5					231.0	38.1	231.0	38.1		
	H72	47	0.158	21,051.8	3,326.2					231.0	36.5	231.0	36.5		
	H73	48	0.152	21,051.8	3,199.9					231.0	35.1	231.0	35.1		
	H74	49	0.146	21,051.8	3,073.6					231.0	33.7	231.0	33.7		
	H75	50	0.141	21,051.8	2,968.3					231.0	32.6	231.0	32.6		
	H76	51	0.135	21,051.8	2,842.0					231.0	31.2	231.0	31.2		
	H77	52	0.130	21,051.8	2,736.7					231.0	30.0	231.0	30.0		
	H78	53	0.125	21,051.8	2,631.5					231.0	28.9	231.0	28.9		
	H79	54	0.120	21,051.8	2,526.2					231.0	27.7	231.0	27.7		
	H80	55	0.116	21,051.8	2,442.0					231.0	26.8	231.0	26.8		
	H81	56	0.111	21,051.8	2,336.7					231.0	25.6	231.0	25.6		
	H82	57	0.107	21,051.8	2,252.5					231.0	24.7	231.0	24.7		
	H83	58	0.103	21,051.8	2,168.3					231.0	23.8	231.0	23.8		
	H84	59	0.099	21,051.8	2,084.1					231.0	22.9	231.0	22.9		
	H85	60	0.095	21,051.8	1,999.9					231.0	21.9	231.0	21.9		
	H86	61	0.091	21,051.8	1,915.7					231.0	21.0	231.0	21.0		
	H87	62	0.088	21,051.8	1,852.6					231.0	20.3	231.0	20.3		
	H88	63	0.085	21,051.8	1,789.4					231.0	19.6	231.0	19.6		
	H89	64	0.081	21,051.8	1,705.2					231.0	18.7	231.0	18.7		
	H90	65	0.078	21,051.8	1,642.0					231.0	18.0	231.0	18.0		
	H91	66	0.075	21,051.8	1,578.9					231.0	17.3	231.0	17.3		
	H92	67	0.072	21,051.8	1,515.7					231.0	16.6	231.0	16.6		
	H93	68	0.069	21,051.8	1,452.6					231.0	15.9	231.0	15.9		
	H94	69	0.067	21,051.8	1,410.5					231.0	15.5	231.0	15.5		
	H95	70	0.064	21,051.8	1,347.3					231.0	14.8	231.0	14.8		
	H96	71	0.062	21,051.8	1,305.2					231.0	14.3	231.0	14.3		
	H97	72	0.059	21,051.8	1,242.1					231.0	13.6	231.0	13.6		
	H98	73	0.057	21,051.8	1,200.0					231.0	13.2	231.0	13.2		
	H99	74	0.055	21,051.8	1,157.8					231.0	12.7	231.0	12.7		
	H100	75	0.053	21,051.8	1,115.7					231.0	12.2	231.0	12.2		
	H101	76	0.051	21,051.8	1,073.6					231.0	11.8	231.0	11.8		
	H102	77	0.049	21,051.8	1,031.5					231.0	11.3	231.0	11.3		
	H103	78	0.047	21,051.8	989.4					231.0	10.9	231.0	10.9		
	H104	79	0.045	21,051.8	947.3					231.0	10.4	231.0	10.4		
	H105	80	0.043	21,051.8	905.2					231.0	9.9	231.0	9.9		
	H106	81	0.042	21,051.8	884.2					231.0	9.7	231.0	9.7		
	H107	82	0.040	21,051.8	842.1					231.0	9.2	231.0	9.2		
	H108	83	0.039	21,051.8	821.0					231.0	9.0	231.0	9.0		
合 計				1,481,478.6	309,345.4	287.5	309,632.9	73,789.1	56,007.3	19,163.6	6,161.2	92,952.7	62,168.5	4.98	247,464.4

様式－５ 費用対便益（残事業・工期-10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			費 用 (C)						費用便益比 B／C	純現在価値 B－C	
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				便益	現在価値			費用	現在価値	費用	現在価値				
整備期間 (2 7 年)	H26	1	0.962	0.0	0.0			10,224.6	9,836.1	518.5	498.8	10,743.1	10,334.9		
	H27	2	0.925	443.2	409.9			6,632.0	6,134.6	360.7	333.6	6,992.7	6,468.2		
	H28	3	0.889	1,320.7	1,174.1			8,352.5	7,425.4	576.7	512.7	8,929.2	7,938.1		
	H29	4	0.855	2,075.8	1,774.8			8,834.5	7,553.5	648.2	554.2	9,482.7	8,107.7		
	H30	5	0.822	2,904.9	2,387.8			10,147.0	8,340.8	812.3	667.7	10,959.3	9,008.5		
	H31	6	0.790	3,969.2	3,135.7			7,369.9	5,822.2	592.8	468.3	7,962.7	6,290.5		
	H32	7	0.760	4,379.4	3,328.3			5,355.1	4,069.9	433.0	329.1	5,788.1	4,399.0		
	H33	8	0.731	4,244.1	3,102.4			1,836.8	1,342.7	150.3	109.9	1,987.1	1,452.6		
	H34	9	0.703	6,073.3	4,269.5			957.0	672.8	79.5	55.9	1,036.5	728.7		
	H35	10	0.676	8,351.3	5,645.5			952.2	643.7	79.5	53.7	1,031.7	697.4		
	H36	11	0.650	10,629.2	6,909.0			910.3	591.7	79.5	51.7	989.8	643.4		
	H37	12	0.625	12,906.8	8,066.8			910.2	568.9	79.5	49.7	989.7	618.6		
	H38	13	0.601	15,184.5	9,125.9			910.2	547.0	79.5	47.8	989.7	594.8		
	H39	14	0.577	17,462.2	10,075.7			894.1	515.9	79.5	45.9	973.6	561.8		
	H40	15	0.555	18,710.2	10,384.1			877.8	487.2	239.5	132.9	1,117.3	620.1		
	H41	16	0.534	18,926.4	10,106.7			877.8	468.7	239.5	127.9	1,117.3	596.6		
	H42	17	0.513	19,142.7	9,820.2			877.8	450.3	239.5	122.9	1,117.3	573.2		
	H43	18	0.494	19,359.1	9,563.4			877.8	433.6	239.5	118.3	1,117.3	551.9		
	H44	19	0.475	19,575.4	9,298.3			816.5	387.8	234.6	111.4	1,051.1	499.2		
	H45	20	0.456	19,776.6	9,018.1			816.5	372.3	234.6	107.0	1,051.1	479.3		
	H46	21	0.439	19,977.7	8,770.2			816.6	358.5	234.6	103.0	1,051.2	461.5		
	H47	22	0.422	20,179.0	8,515.5			816.6	344.6	234.6	99.0	1,051.2	443.6		
	H48	23	0.406	20,380.2	8,274.4			665.7	270.3	222.6	90.4	888.3	360.7		
	H49	24	0.390	20,544.2	8,012.3			514.9	200.8	210.5	82.1	725.4	282.9		
	H50	25	0.375	20,671.1	7,751.7			514.9	193.1	210.5	78.9	725.4	272.0		
	H51	26	0.361	20,798.0	7,508.1			514.9	185.9	210.5	76.0	725.4	261.9		
	H52	27	0.347	20,924.9	7,260.9			514.9	178.7	210.5	73.0	725.4	251.7		
施設完成後の 評価期間 (5 0 年)	H53	28	0.333	21,051.8	7,010.2					279.3	93.0	279.3	93.0		
	H54	29	0.321	21,051.8	6,757.6					279.3	89.7	279.3	89.7		
	H55	30	0.308	21,051.8	6,484.0					279.3	86.0	279.3	86.0		
	H56	31	0.296	21,051.8	6,231.3					279.3	82.7	279.3	82.7		
	H57	32	0.285	21,051.8	5,999.8					279.3	79.6	279.3	79.6		
	H58	33	0.274	21,051.8	5,768.2					279.3	76.5	279.3	76.5		
	H59	34	0.264	21,051.8	5,557.7					279.3	73.7	279.3	73.7		
	H60	35	0.253	21,051.8	5,326.1					279.3	70.7	279.3	70.7		
	H61	36	0.244	21,051.8	5,136.6					279.3	68.1	279.3	68.1		
	H62	37	0.234	21,051.8	4,926.1					279.3	65.4	279.3	65.4		
	H63	38	0.225	21,051.8	4,736.7					279.3	62.8	279.3	62.8		
	H64	39	0.217	21,051.8	4,568.2					279.3	60.6	279.3	60.6		
	H65	40	0.208	21,051.8	4,378.8					279.3	58.1	279.3	58.1		
	H66	41	0.200	21,051.8	4,210.4					279.3	55.9	279.3	55.9		
	H67	42	0.193	21,051.8	4,063.0					279.3	53.9	279.3	53.9		
	H68	43	0.185	21,051.8	3,894.6					279.3	51.7	279.3	51.7		
	H69	44	0.178	21,051.8	3,747.2					279.3	49.7	279.3	49.7		
	H70	45	0.171	21,051.8	3,599.9					279.3	47.8	279.3	47.8		
	H71	46	0.165	21,051.8	3,473.5					279.3	46.1	279.3	46.1		
	H72	47	0.158	21,051.8	3,326.2					279.3	44.1	279.3	44.1		
	H73	48	0.152	21,051.8	3,199.9					279.3	42.5	279.3	42.5		
	H74	49	0.146	21,051.8	3,073.6					279.3	40.8	279.3	40.8		
	H75	50	0.141	21,051.8	2,968.3					279.3	39.4	279.3	39.4		
	H76	51	0.135	21,051.8	2,842.0					279.3	37.7	279.3	37.7		
	H77	52	0.130	21,051.8	2,736.7					279.3	36.3	279.3	36.3		
	H78	53	0.125	21,051.8	2,631.5					279.3	34.9	279.3	34.9		
	H79	54	0.120	21,051.8	2,526.2					279.3	33.5	279.3	33.5		
	H80	55	0.116	21,051.8	2,442.0					279.3	32.4	279.3	32.4		
	H81	56	0.111	21,051.8	2,336.7					279.3	31.0	279.3	31.0		
	H82	57	0.107	21,051.8	2,252.5					279.3	29.9	279.3	29.9		
	H83	58	0.103	21,051.8	2,168.3					279.3	28.8	279.3	28.8		
	H84	59	0.099	21,051.8	2,084.1					279.3	27.7	279.3	27.7		
	H85	60	0.095	21,051.8	1,999.9					279.3	26.5	279.3	26.5		
	H86	61	0.091	21,051.8	1,915.7					279.3	25.4	279.3	25.4		
H87	62	0.088	21,051.8	1,852.6					279.3	24.6	279.3	24.6			
H88	63	0.085	21,051.8	1,789.4					279.3	23.7	279.3	23.7			
H89	64	0.081	21,051.8	1,705.2					279.3	22.6	279.3	22.6			
H90	65	0.078	21,051.8	1,642.0					279.3	21.8	279.3	21.8			
H91	66	0.075	21,051.8	1,578.9					279.3	20.9	279.3	20.9			
H92	67	0.072	21,051.8	1,515.7					279.3	20.1	279.3	20.1			
H93	68	0.069	21,051.8	1,452.6					279.3	19.3	279.3	19.3			
H94	69	0.067	21,051.8	1,410.5					279.3	18.7	279.3	18.7			
H95	70	0.064	21,051.8	1,347.3					279.3	17.9	279.3	17.9			
H96	71	0.062	21,051.8	1,305.2					279.3	17.3	279.3	17.3			
H97	72	0.059	21,051.8	1,242.1					279.3	16.5	279.3	16.5			
H98	73	0.057	21,051.8	1,200.0					279.3	15.9	279.3	15.9			
H99	74	0.055	21,051.8	1,157.8					279.3	15.4	279.3	15.4			
H100	75	0.053	21,051.8	1,115.7					279.3	14.8	279.3	14.8			
H101	76	0.051	21,051.8	1,073.6					279.3	14.2	279.3	14.2			
H102	77	0.049	21,051.8	1,031.5					279.3	13.7	279.3	13.7			
合 計				1,401,500.1	330,482.9	366.6	330,849.5	73,789.1	58,397.0	21,495.5	7,182.1	95,284.6	65,579.1	5.05	265,270.4

様式－５ 費用対便益（残事業・資産+10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			費 用 (C)						費用便益比 B/C	純現在価値 B－C	
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				費用	現在価値			費用	現在価値	費用	現在価値				
整備期間（30年）	H26	1	0.962	0.0	0.0			9,606.8	9,241.7	489.0	470.4	10,095.8	9,712.1		
	H27	2	0.925	387.3	358.3			5,559.9	5,142.9	274.6	254.0	5,834.5	5,396.9		
	H28	3	0.889	1,276.4	1,134.7			7,604.7	6,760.6	529.4	470.6	8,134.1	7,231.2		
	H29	4	0.855	2,051.5	1,754.0			7,313.1	6,252.7	498.0	425.8	7,811.1	6,678.5		
	H30	5	0.822	2,727.4	2,241.9			8,907.9	7,322.3	713.6	586.6	9,621.5	7,908.9		
	H31	6	0.790	3,759.5	2,970.0			9,356.7	7,391.8	750.4	592.8	10,107.1	7,984.6		
	H32	7	0.760	4,892.3	3,718.1			4,817.1	3,661.0	390.4	296.7	5,207.5	3,957.7		
	H33	8	0.731	4,758.9	3,478.8			4,820.7	3,523.9	390.7	285.6	5,211.4	3,809.5		
	H34	9	0.703	4,662.9	3,278.0			861.3	605.5	72.4	50.9	933.7	656.4		
	H35	10	0.676	6,910.4	4,671.4			861.2	582.2	72.4	48.9	933.6	631.1		
	H36	11	0.650	9,157.8	5,952.6			861.2	559.8	72.4	47.1	933.6	606.9		
	H37	12	0.625	11,405.3	7,128.3			819.3	512.1	72.5	45.3	891.8	557.4		
	H38	13	0.601	13,652.5	8,205.2			819.3	492.4	72.5	43.6	891.8	536.0		
	H39	14	0.577	15,899.8	9,174.2			819.2	472.7	72.4	41.8	891.6	514.5		
	H40	15	0.555	18,147.0	10,071.6			819.2	454.7	72.4	40.2	891.6	494.9		
	H41	16	0.534	20,395.3	10,891.1			790.0	421.9	221.8	118.4	1,011.8	540.3		
	H42	17	0.513	20,609.0	10,572.4			790.0	405.3	221.8	113.8	1,011.8	519.1		
	H43	18	0.494	20,822.7	10,286.4			790.0	390.3	221.8	109.6	1,011.8	499.9		
	H44	19	0.475	21,036.4	9,992.3			790.0	375.3	221.8	105.4	1,011.8	480.7		
	H45	20	0.456	21,250.2	9,690.1			790.0	360.2	221.8	101.1	1,011.8	461.3		
	H46	21	0.439	21,463.9	9,422.7			734.9	322.6	217.4	95.4	952.3	418.0		
	H47	22	0.422	21,662.7	9,141.7			734.9	310.1	217.4	91.7	952.3	401.8		
	H48	23	0.406	21,861.5	8,875.8			734.9	298.4	217.4	88.3	952.3	386.7		
	H49	24	0.390	22,060.3	8,603.5			734.9	286.6	217.4	84.8	952.3	371.4		
	H50	25	0.375	22,259.1	8,347.2			734.9	275.6	217.4	81.5	952.3	357.1		
	H51	26	0.361	22,458.0	8,107.3			463.4	167.3	195.7	70.6	659.1	237.9		
	H52	27	0.347	22,583.3	7,836.4			463.4	160.8	195.7	67.9	659.1	228.7		
	H53	28	0.333	22,708.7	7,562.0			463.4	154.3	195.7	65.2	659.1	219.5		
	H54	29	0.321	22,834.1	7,329.7			463.4	148.8	195.7	62.8	659.1	211.6		
	H55	30	0.308	22,959.4	7,071.5			463.4	142.7	195.7	60.3	659.1	203.0		
施設完成後の評価期間（50年）	H56	31	0.296	23,084.8	6,833.1					257.6	76.2	257.6	76.2		
	H57	32	0.285	23,084.8	6,579.2					257.6	73.4	257.6	73.4		
	H58	33	0.274	23,084.8	6,325.2					257.6	70.6	257.6	70.6		
	H59	34	0.264	23,084.8	6,094.4					257.6	68.0	257.6	68.0		
	H60	35	0.253	23,084.8	5,840.5					257.6	65.2	257.6	65.2		
	H61	36	0.244	23,084.8	5,632.7					257.6	62.9	257.6	62.9		
	H62	37	0.234	23,084.8	5,401.8					257.6	60.3	257.6	60.3		
	H63	38	0.225	23,084.8	5,194.1					257.6	58.0	257.6	58.0		
	H64	39	0.217	23,084.8	5,009.4					257.6	55.9	257.6	55.9		
	H65	40	0.208	23,084.8	4,801.6					257.6	53.6	257.6	53.6		
	H66	41	0.200	23,084.8	4,617.0					257.6	51.5	257.6	51.5		
	H67	42	0.193	23,084.8	4,455.4					257.6	49.7	257.6	49.7		
	H68	43	0.185	23,084.8	4,270.7					257.6	47.7	257.6	47.7		
	H69	44	0.178	23,084.8	4,109.1					257.6	45.9	257.6	45.9		
	H70	45	0.171	23,084.8	3,947.5					257.6	44.0	257.6	44.0		
	H71	46	0.165	23,084.8	3,809.0					257.6	42.5	257.6	42.5		
	H72	47	0.158	23,084.8	3,647.4					257.6	40.7	257.6	40.7		
	H73	48	0.152	23,084.8	3,508.9					257.6	39.2	257.6	39.2		
	H74	49	0.146	23,084.8	3,370.4					257.6	37.6	257.6	37.6		
	H75	50	0.141	23,084.8	3,255.0					257.6	36.3	257.6	36.3		
	H76	51	0.135	23,084.8	3,116.4					257.6	34.8	257.6	34.8		
	H77	52	0.130	23,084.8	3,001.0					257.6	33.5	257.6	33.5		
	H78	53	0.125	23,084.8	2,885.6					257.6	32.2	257.6	32.2		
	H79	54	0.120	23,084.8	2,770.2					257.6	30.9	257.6	30.9		
	H80	55	0.116	23,084.8	2,677.8					257.6	29.9	257.6	29.9		
	H81	56	0.111	23,084.8	2,562.4					257.6	28.6	257.6	28.6		
	H82	57	0.107	23,084.8	2,470.1					257.6	27.6	257.6	27.6		
	H83	58	0.103	23,084.8	2,377.7					257.6	26.5	257.6	26.5		
	H84	59	0.099	23,084.8	2,285.4					257.6	25.5	257.6	25.5		
	H85	60	0.095	23,084.8	2,193.1					257.6	24.5	257.6	24.5		
	H86	61	0.091	23,084.8	2,100.7					257.6	23.4	257.6	23.4		
	H87	62	0.088	23,084.8	2,031.5					257.6	22.7	257.6	22.7		
	H88	63	0.085	23,084.8	1,962.2					257.6	21.9	257.6	21.9		
	H89	64	0.081	23,084.8	1,869.9					257.6	20.9	257.6	20.9		
	H90	65	0.078	23,084.8	1,800.6					257.6	20.1	257.6	20.1		
	H91	66	0.075	23,084.8	1,731.4					257.6	19.3	257.6	19.3		
	H92	67	0.072	23,084.8	1,662.1					257.6	18.5	257.6	18.5		
	H93	68	0.069	23,084.8	1,592.9					257.6	17.8	257.6	17.8		
	H94	69	0.067	23,084.8	1,546.7					257.6	17.3	257.6	17.3		
	H95	70	0.064	23,084.8	1,477.4					257.6	16.5	257.6	16.5		
	H96	71	0.062	23,084.8	1,431.3					257.6	16.0	257.6	16.0		
	H97	72	0.059	23,084.8	1,362.0					257.6	15.2	257.6	15.2		
	H98	73	0.057	23,084.8	1,315.8					257.6	14.7	257.6	14.7		
	H99	74	0.055	23,084.8	1,269.7					257.6	14.2	257.6	14.2		
	H100	75	0.053	23,084.8	1,223.5					257.6	13.7	257.6	13.7		
	H101	76	0.051	23,084.8	1,177.3					257.6	13.1	257.6	13.1		
	H102	77	0.049	23,084.8	1,131.2					257.6	12.6	257.6	12.6		
	H103	78	0.047	23,084.8	1,085.0					257.6	12.1	257.6	12.1		
	H104	79	0.045	23,084.8	1,038.8					257.6	11.6	257.6	11.6		
	H105	80	0.043	23,084.8	992.6					257.6	11.1	257.6	11.1		
合 計				1,580,893.6	350,711.9	323.4	351,035.3	73,789.1	57,196.5	20,597.6	6,723.0	94,386.7	63,919.5	5.49	287,115.8

様式－５ 費用対便益（残事業・資産-10%）

水系名：由良川水系 河川名：由良川

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			残存価値 ②	計 ①+②	費 用 (C)						費用便益比 B / C	純現在価値 B - C
				便益①		建設費③			維持管理費④		計③+④					
				便益	現在価値				費用	現在価値	費用	現在価値				
整備期間 (3 0 年)	H26	1	0.962	0.0	0.0			9,606.8	9,241.7	489.0	470.4	10,095.8	9,712.1			
	H27	2	0.925	319.1	295.2			5,559.9	5,142.9	274.6	254.0	5,834.5	5,396.9			
	H28	3	0.889	1,051.2	934.5			7,604.7	6,760.6	529.4	470.6	8,134.1	7,231.2			
	H29	4	0.855	1,689.5	1,444.5			7,313.1	6,252.7	498.0	425.8	7,811.1	6,678.5			
	H30	5	0.822	2,246.2	1,846.4			8,907.9	7,322.3	713.6	586.6	9,621.5	7,908.9			
	H31	6	0.790	3,096.2	2,446.0			9,356.7	7,391.8	750.4	592.8	10,107.1	7,984.6			
	H32	7	0.760	4,028.9	3,062.0			4,817.1	3,661.0	390.4	296.7	5,207.5	3,957.7			
	H33	8	0.731	3,918.6	2,864.5			4,820.7	3,523.9	390.7	285.6	5,211.4	3,809.5			
	H34	9	0.703	3,839.0	2,698.8			861.3	605.5	72.4	50.9	933.7	656.4			
	H35	10	0.676	5,691.8	3,847.7			861.2	582.2	72.4	48.9	933.6	631.1			
	H36	11	0.650	7,544.7	4,904.1			861.2	559.8	72.4	47.1	933.6	606.9			
	H37	12	0.625	9,397.5	5,873.4			819.3	512.1	72.5	45.3	891.8	557.4			
	H38	13	0.601	11,250.0	6,761.3			819.3	492.4	72.5	43.6	891.8	536.0			
	H39	14	0.577	13,102.6	7,560.2			819.2	472.7	72.4	41.8	891.6	514.5			
	H40	15	0.555	14,955.2	8,300.1			819.2	454.7	72.4	40.2	891.6	494.9			
	H41	16	0.534	16,808.7	8,975.8			790.0	421.9	221.8	118.4	1,011.8	540.3			
	H42	17	0.513	16,984.4	8,713.0			790.0	405.3	221.8	113.8	1,011.8	519.1			
	H43	18	0.494	17,160.0	8,477.0			790.0	390.3	221.8	109.6	1,011.8	499.9			
	H44	19	0.475	17,335.6	8,234.4			790.0	375.3	221.8	105.4	1,011.8	480.7			
	H45	20	0.456	17,511.3	7,985.2			790.0	360.2	221.8	101.1	1,011.8	461.3			
	H46	21	0.439	17,686.9	7,764.5			734.9	322.6	217.4	95.4	952.3	418.0			
	H47	22	0.422	17,850.3	7,532.8			734.9	310.1	217.4	91.7	952.3	401.8			
	H48	23	0.406	18,013.7	7,313.6			734.9	298.4	217.4	88.3	952.3	386.7			
	H49	24	0.390	18,177.0	7,089.0			734.9	286.6	217.4	84.8	952.3	371.4			
	H50	25	0.375	18,340.4	6,877.7			734.9	275.6	217.4	81.5	952.3	357.1			
	H51	26	0.361	18,503.8	6,679.9			463.4	167.3	195.7	70.6	659.1	237.9			
	H52	27	0.347	18,606.8	6,456.6			463.4	160.8	195.7	67.9	659.1	228.7			
	H53	28	0.333	18,709.8	6,230.4			463.4	154.3	195.7	65.2	659.1	219.5			
	H54	29	0.321	18,812.9	6,038.9			463.4	148.8	195.7	62.8	659.1	211.6			
	H55	30	0.308	18,915.9	5,826.1			463.4	142.7	195.7	60.3	659.1	203.0			
施設完成後の 評価期間 (5 0 年)	H56	31	0.296	19,018.9	5,629.6					257.6	76.2	257.6	76.2			
	H57	32	0.285	19,018.9	5,420.4					257.6	73.4	257.6	73.4			
	H58	33	0.274	19,018.9	5,211.2					257.6	70.6	257.6	70.6			
	H59	34	0.264	19,018.9	5,021.0					257.6	68.0	257.6	68.0			
	H60	35	0.253	19,018.9	4,811.8					257.6	65.2	257.6	65.2			
	H61	36	0.244	19,018.9	4,640.6					257.6	62.9	257.6	62.9			
	H62	37	0.234	19,018.9	4,450.4					257.6	60.3	257.6	60.3			
	H63	38	0.225	19,018.9	4,279.3					257.6	58.0	257.6	58.0			
	H64	39	0.217	19,018.9	4,127.1					257.6	55.9	257.6	55.9			
	H65	40	0.208	19,018.9	3,955.9					257.6	53.6	257.6	53.6			
	H66	41	0.200	19,018.9	3,803.8					257.6	51.5	257.6	51.5			
	H67	42	0.193	19,018.9	3,670.6					257.6	49.7	257.6	49.7			
	H68	43	0.185	19,018.9	3,518.5					257.6	47.7	257.6	47.7			
	H69	44	0.178	19,018.9	3,385.4					257.6	45.9	257.6	45.9			
	H70	45	0.171	19,018.9	3,252.2					257.6	44.0	257.6	44.0			
	H71	46	0.165	19,018.9	3,138.1					257.6	42.5	257.6	42.5			
	H72	47	0.158	19,018.9	3,005.0					257.6	40.7	257.6	40.7			
	H73	48	0.152	19,018.9	2,890.9					257.6	39.2	257.6	39.2			
	H74	49	0.146	19,018.9	2,776.8					257.6	37.6	257.6	37.6			
	H75	50	0.141	19,018.9	2,681.7					257.6	36.3	257.6	36.3			
	H76	51	0.135	19,018.9	2,567.6					257.6	34.8	257.6	34.8			
	H77	52	0.130	19,018.9	2,472.5					257.6	33.5	257.6	33.5			
	H78	53	0.125	19,018.9	2,377.4					257.6	32.2	257.6	32.2			
	H79	54	0.120	19,018.9	2,282.3					257.6	30.9	257.6	30.9			
	H80	55	0.116	19,018.9	2,206.2					257.6	29.9	257.6	29.9			
	H81	56	0.111	19,018.9	2,111.1					257.6	28.6	257.6	28.6			
	H82	57	0.107	19,018.9	2,035.0					257.6	27.6	257.6	27.6			
	H83	58	0.103	19,018.9	1,958.9					257.6	26.5	257.6	26.5			
	H84	59	0.099	19,018.9	1,882.9					257.6	25.5	257.6	25.5			
	H85	60	0.095	19,018.9	1,806.8					257.6	24.5	257.6	24.5			
	H86	61	0.091	19,018.9	1,730.7					257.6	23.4	257.6	23.4			
	H87	62	0.088	19,018.9	1,673.7					257.6	22.7	257.6	22.7			
	H88	63	0.085	19,018.9	1,616.6					257.6	21.9	257.6	21.9			
	H89	64	0.081	19,018.9	1,540.5					257.6	20.9	257.6	20.9			
	H90	65	0.078	19,018.9	1,483.5					257.6	20.1	257.6	20.1			
	H91	66	0.075	19,018.9	1,426.4					257.6	19.3	257.6	19.3			
	H92	67	0.072	19,018.9	1,369.4					257.6	18.5	257.6	18.5			
	H93	68	0.069	19,018.9	1,312.3					257.6	17.8	257.6	17.8			
	H94	69	0.067	19,018.9	1,274.3					257.6	17.3	257.6	17.3			
	H95	70	0.064	19,018.9	1,217.2					257.6	16.5	257.6	16.5			
	H96	71	0.062	19,018.9	1,179.2					257.6	16.0	257.6	16.0			
	H97	72	0.059	19,018.9	1,122.1					257.6	15.2	257.6	15.2			
	H98	73	0.057	19,018.9	1,084.1					257.6	14.7	257.6	14.7			
	H99	74	0.055	19,018.9	1,046.0					257.6	14.2	257.6	14.2			
	H100	75	0.053	19,018.9	1,008.0					257.6	13.7	257.6	13.7			
	H101	76	0.051	19,018.9	970.0					257.6	13.1	257.6	13.1			
	H102	77	0.049	19,018.9	931.9					257.6	12.6	257.6	12.6			
	H103	78	0.047	19,018.9	893.9					257.6	12.1	257.6	12.1			
	H104	79	0.045	19,018.9	855.9					257.6	11.6	257.6	11.6			
	H105	80	0.043	19,018.9	817.8					257.6	11.1	257.6	11.1			
合 計				1,302,493.0	288,958.1	323.4	289,281.5	73,789.1	57,196.5	20,597.6	6,723.0	94,386.7	63,919.5	4.53	225,362.0	

事業費の内訳書

河川事業

事業名	由良川直轄河川改修事業（全体事業費）
-----	--------------------

評価年度	平成25年度	再評価
------	--------	-----

区分	費目	工種	単位	数量	金額 (百万円)	備考
工事費			式	1	73,081	
	本工事費		式	1	71,524	
		築堤	km	39	33,987	
		護岸	m	4,680	2,520	
		河道掘削	千m³	1,491	10,386	樹木伐採含む
		樋門・樋管	箇所	40	15,970	
		堤防改築	m	1,000	466	
		堰改築	箇所	1	3,519	
		その他	式	1	4,678	堤防強化、水防拠点、情報通信設備他
	附帯工事費		式	1	1,556	
		橋梁	箇所	3	884	
		その他	式	1	672	
用地費及補償費			式		31,836	
	用地費	式	1	18,445		
	補償費	式	1	13,391		
間接経費・工事諸費			式	1	37,693	
事業費 計			式		142,610	

維持管理費	式		31,705	91年間(H15～H105)
-------	---	--	--------	----------------

事業費の内訳書

河川事業

事業名	由良川直轄河川改修事業（残事業費）
-----	-------------------

評価年度	平成25年度	再評価
------	--------	-----

区分	費目	工種	単位	数量	金額 (百万円)	備考
工事費			式	1	38,827	
	本工事費		式	1	38,454	
		築堤	km	18	12,763	
		護岸	m	1,400	555	
		河道掘削	千m³	1,446	9,966	樹木伐採含む
		樋門・樋管	箇所	16	9,709	
		堤防改築	m	1,000	466	
		堰改築	箇所	1	3,519	
		その他	式	1	1,478	堤防強化、水防拠点、情報通信設備他
	附帯工事費		式	1	373	
		橋梁	箇所	1	100	
		その他	式	1	273	
用地費及補償費			式		10,978	
	用地費	式	1	5,107		
	補償費	式	1	5,871		
間接経費・工事諸費			式	1	23,983	
事業費 計			式		73,789	

維持管理費	式		20,598	80年間(H26～H105)
-------	---	--	--------	----------------