



様式-1 ブロック分割図(鳴瀬川)

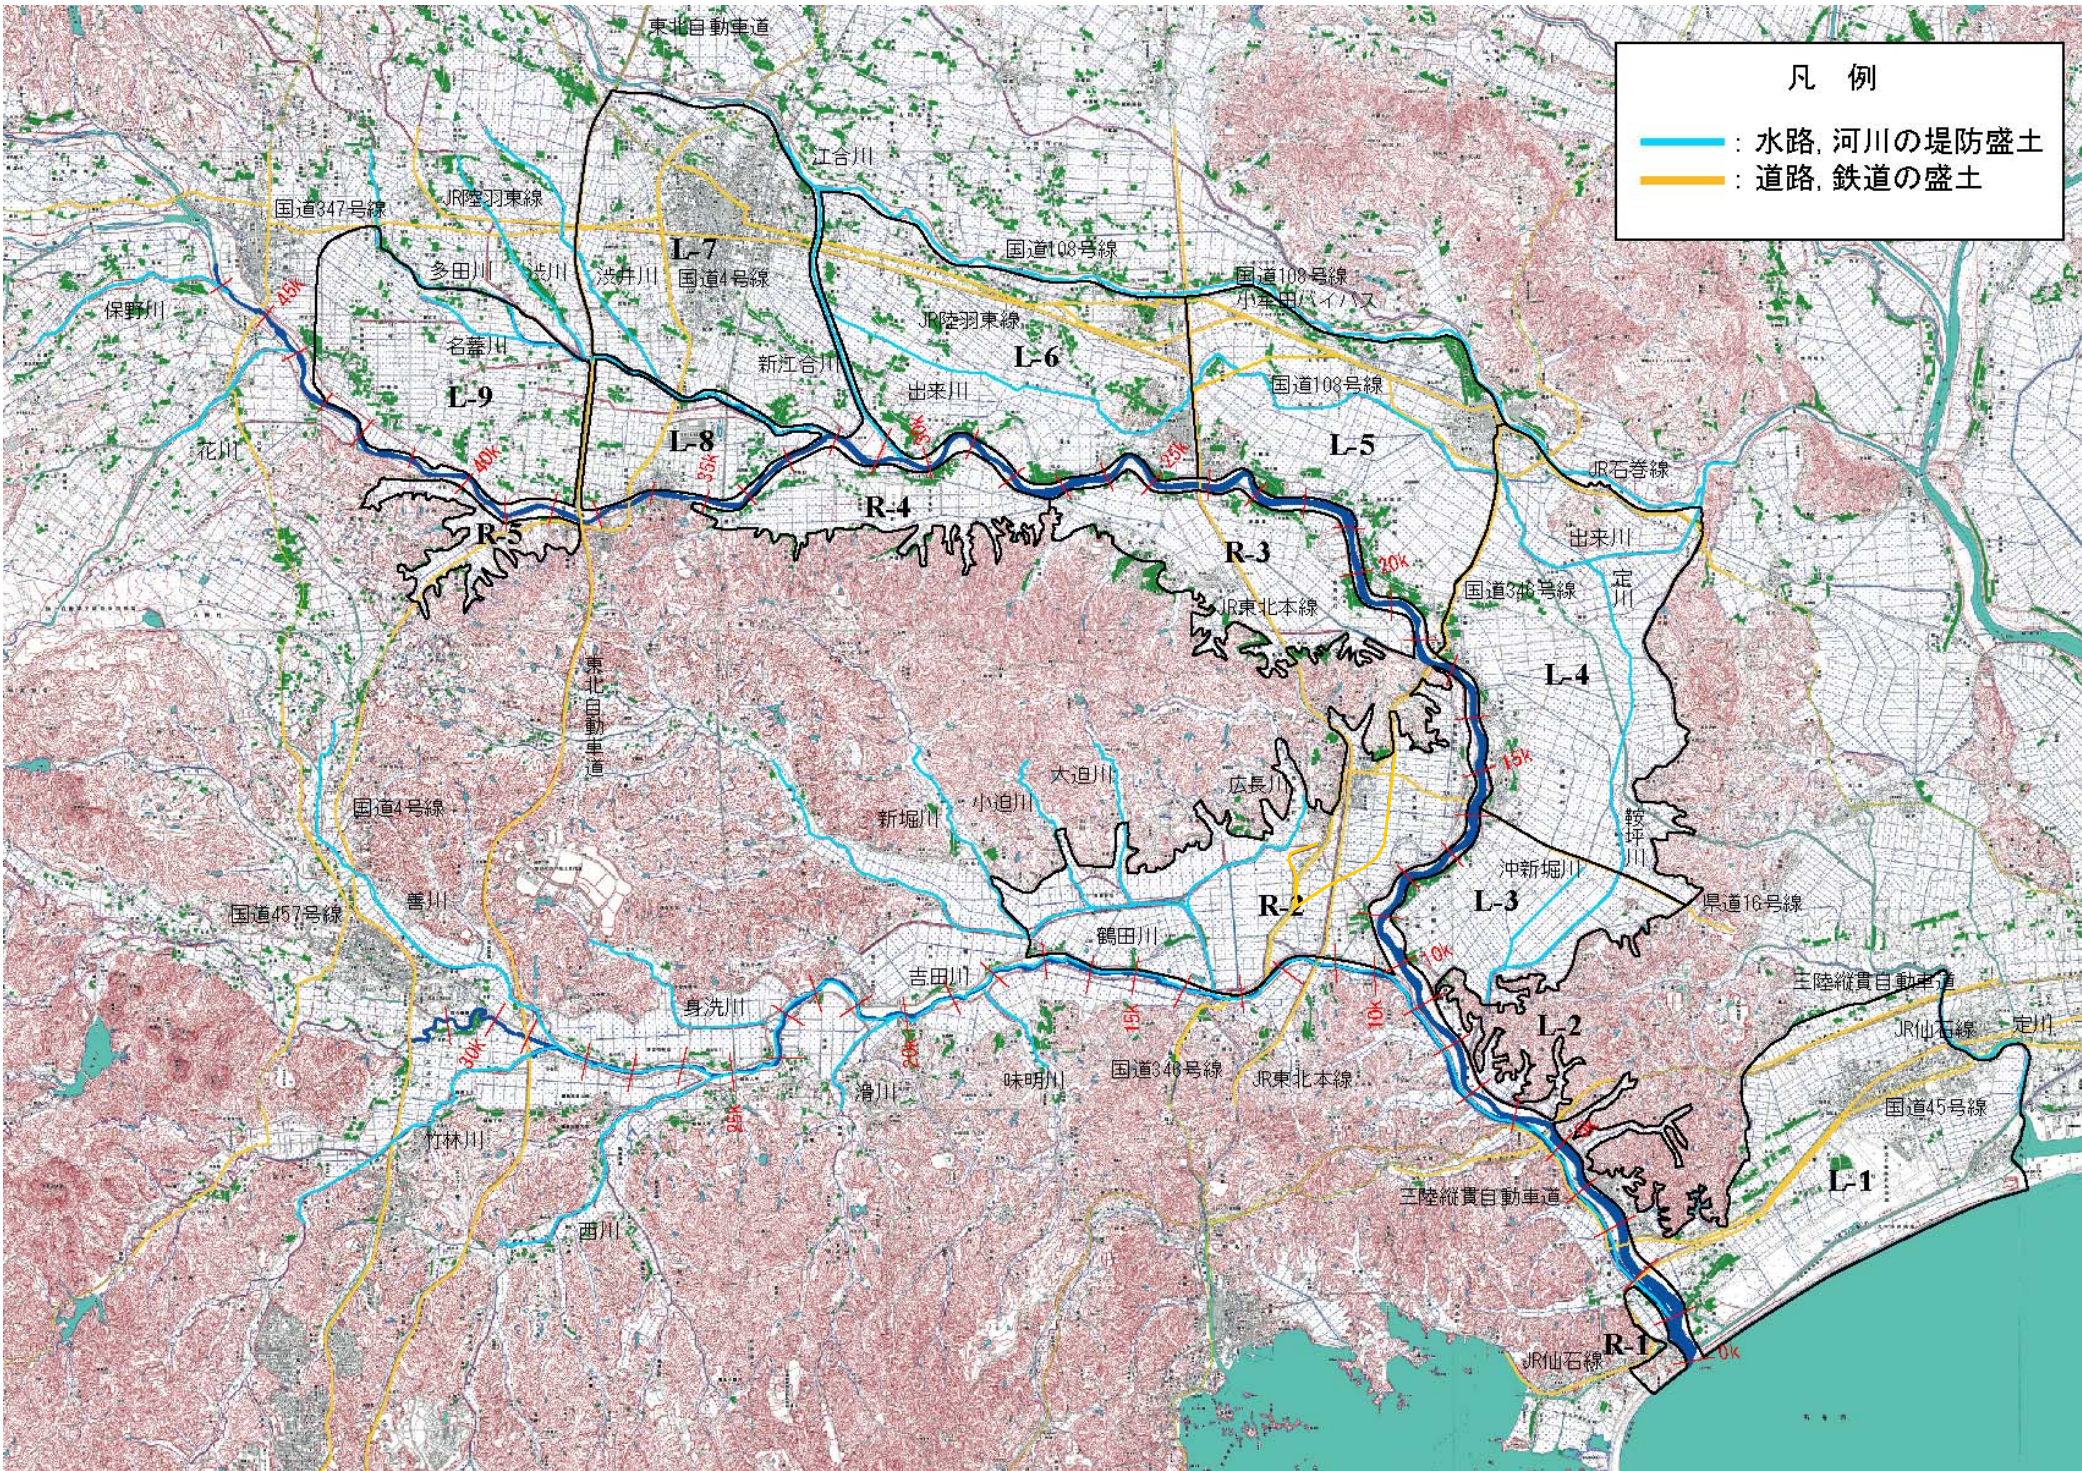

様式-1 ブロック分割図(吉田川)

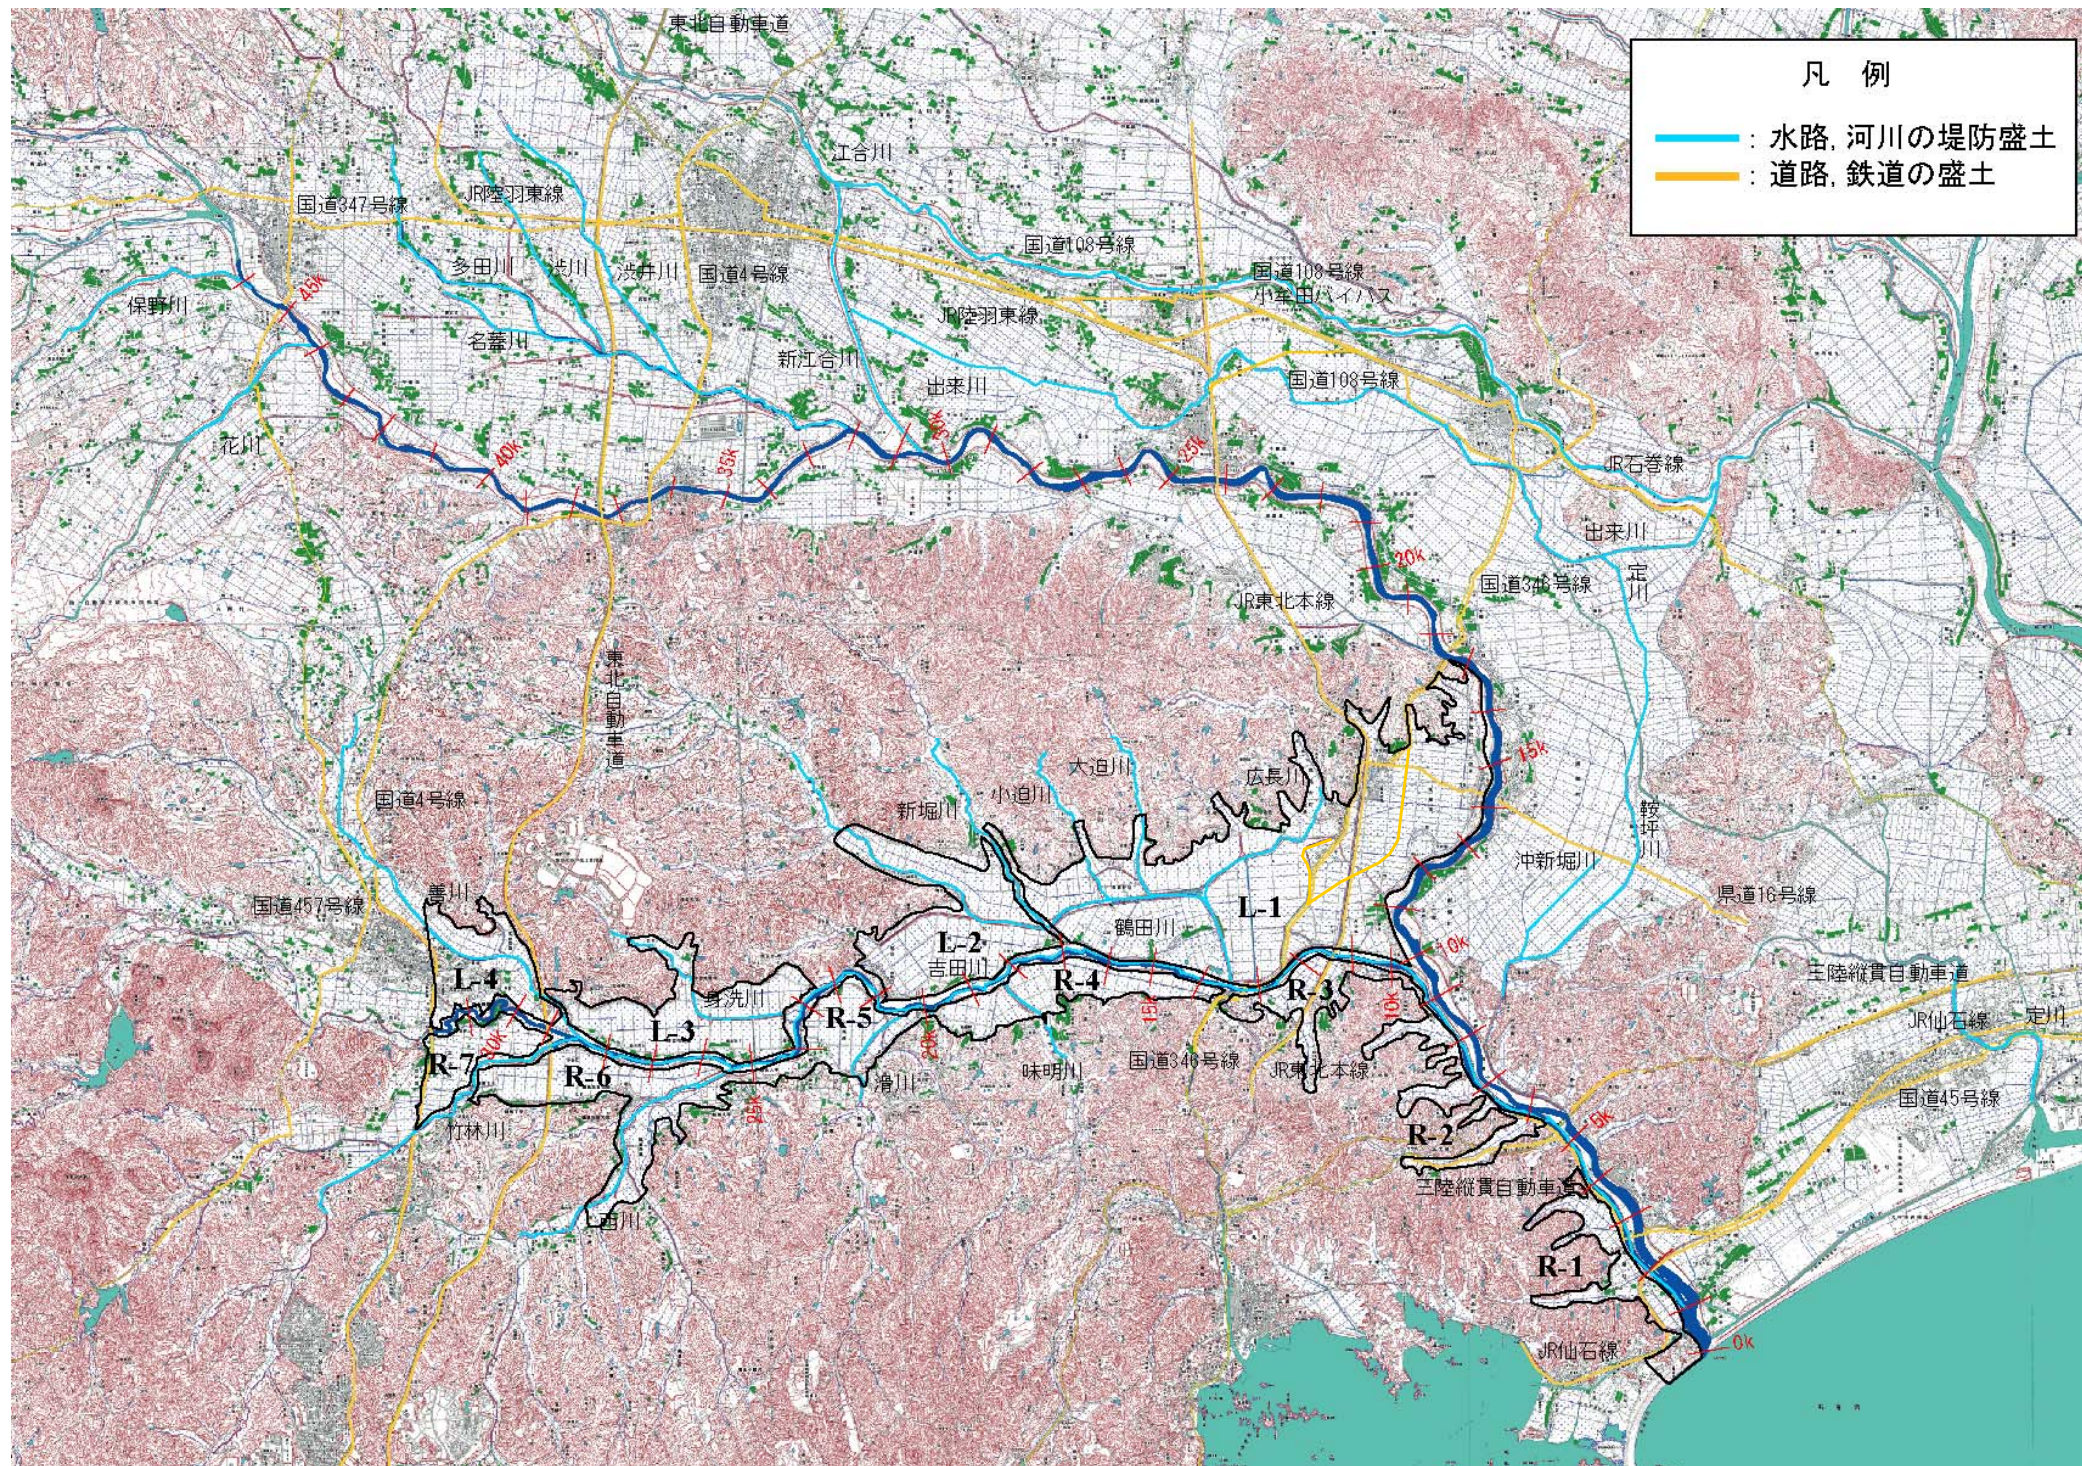

様式－２

資産データ

水系名：鳴瀬川水系

河川名：鳴瀬川・吉田川

国勢調査年：平成22年

事業所統計調査年：平成21年

氾濫 ブロック	ブロック 面積 (ha)	一般資産等基礎数量							一般資産被害額（百万円）							農作物被害額（百万円）			一般資産額 等合計	備考
		人口 (人)	世帯数 (世帯)	従業者数 (産業分類別に算 出) (人)	農漁家数 (世帯)	延床面積 (ha)	水田面積 (ha)	畑面積 (ha)	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計		
											償却	在庫	償却	在庫						
鳴瀬川L-1	3,465	25,217	8,494	8,941	445	14,767	1,402	191	265,209	118,970	25,351	15,094	860	196	425,680	1,914	180	2,094	427,774	
鳴瀬川L-2	580	349	87	46	23	152	193	16	2,729	1,218	62	58	45	10	4,122	263	15	278	4,400	
鳴瀬川L-3	1,531	1,677	440	253	133	1,024	1,084	49	18,386	6,161	680	686	257	59	26,229	1,479	46	1,525	27,754	
鳴瀬川L-4	3,358	5,272	1,492	1,957	302	4,246	2,352	139	76,259	20,903	4,874	3,753	583	133	106,505	3,205	131	3,336	109,841	
鳴瀬川L-5	2,325	12,513	4,163	4,589	333	10,344	1,619	92	185,774	58,308	15,278	11,024	643	147	271,174	2,203	87	2,290	273,464	
鳴瀬川L-6	2,627	16,264	5,477	6,448	350	12,363	1,671	88	222,040	76,712	18,915	11,500	677	154	329,998	2,275	83	2,358	332,356	
鳴瀬川L-7	3,137	45,102	17,431	24,703	408	39,037	1,749	6	701,107	244,155	73,921	34,869	788	180	1,055,020	2,381	5	2,386	1,057,406	
鳴瀬川L-8	712	2,530	809	2,658	68	1,944	462	4	34,919	11,333	11,419	9,694	132	30	67,527	629	4	633	68,160	
鳴瀬川L-9	2,608	11,972	3,761	6,318	349	11,696	1,893	38	210,051	52,684	19,386	14,778	673	153	297,725	2,576	36	2,612	300,337	
鳴瀬川R-1	208	1,031	340	274	14	523	43	4	9,389	4,760	502	270	27	6	14,954	58	4	62	15,016	
鳴瀬川R-2	3,755	11,293	3,506	3,327	293	7,971	2,098	176	143,164	49,106	7,804	5,492	567	129	206,262	2,864	165	3,029	209,291	
鳴瀬川R-3	1,846	6,126	1,886	1,282	189	4,193	1,043	63	75,319	26,413	3,219	2,434	366	84	107,835	1,420	59	1,479	109,314	
鳴瀬川R-4	1,399	1,983	529	377	109	1,207	708	24	21,679	7,408	1,357	1,227	210	48	31,929	963	22	985	32,914	
鳴瀬川R-5	1,027	2,868	890	1,215	48	2,252	429	26	40,437	12,465	7,338	3,403	93	21	63,757	584	25	609	64,366	
吉田川L-1	3,849	11,435	3,544	3,331	292	8,115	2,131	181	145,747	49,644	7,837	5,487	565	129	209,409	2,909	171	3,080	212,489	
吉田川L-2	1,436	1,637	421	431	68	1,528	722	48	27,444	5,902	810	579	132	30	34,897	986	46	1,032	35,929	
吉田川L-3	983	813	203	221	50	345	494	7	6,190	2,847	651	253	97	22	10,060	675	6	681	10,741	
吉田川L-4	517	4,230	1,585	4,373	48	4,290	205	2	77,049	22,205	13,953	8,448	92	21	121,768	280	1	281	122,049	
吉田川R-1	1,039	3,924	1,254	827	72	2,154	254	25	38,686	17,570	1,773	1,393	138	32	59,592	347	23	370	59,962	
吉田川R-2	384	248	67	111	21	201	153	11	3,610	935	480	488	41	9	5,563	209	10	219	5,782	
吉田川R-3	655	1,418	411	202	45	864	273	24	15,510	5,759	384	451	88	20	22,212	373	22	395	22,607	
吉田川R-4	869	2,534	696	947	78	2,031	458	51	36,477	9,749	2,774	1,650	151	34	50,835	625	48	673	51,508	
吉田川R-5	605	2,166	594	1,194	58	1,903	372	16	34,185	8,327	4,275	2,667	112	25	49,591	508	15	523	50,114	
吉田川R-6	1,273	2,001	486	664	86	1,171	629	10	21,019	6,811	3,122	1,480	167	38	32,637	858	9	867	33,504	
吉田川R-7	378	569	158	248	32	292	296	4	5,248	2,218	1,950	518	62	14	10,010	404	4	408	10,418	
合計	40,566	175,172	58,724	74,937	3,914	134,613	22,733	1,295	2,417,627	822,563	228,115	137,696	7,566	1,724	3,615,291	30,988	1,217	32,205	3,647,496	

様式-3 被害額（事業実施前） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/5 （単位：百万円）

[illegible]

様式ー3		被害額（事業実施前）						水系名：鳴瀬川水系				河川名：鳴瀬川・吉				流量規模：1/10				（単位：百万円）		
記 入 ブ ロ ッ ク	一般資産被害額						農作物被害額			公共土木 施設等被 害額	営業停 止損失	家屋における 応急対策費用			事業所にお ける応急 対策費用	その他の 間接被害	小計	合計	備考			
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労働 対価	代替活動 等						小計		
			償却	在庫	償却	在庫																
鳴瀬川L-1	2,466	1,657	345	208	10	3	4,689	107	8	115	7,943	118	71	104	175	108	0	401	13,148			
鳴瀬川L-2	18	10	0	0	0	0	28	15	0	15	47	0	0	0	0	0	0	0	90			
鳴瀬川L-3	402	183	41	23	4	1	654	385	3	388	1,108	14	8	14	22	8	0	44	2,194			
鳴瀬川L-4	698	345	150	72	6	2	1,273	265	2	267	2,156	74	20	35	55	31	0	160	3,856			
鳴瀬川L-5	1,264	650	131	31	5	2	2,083	297	3	300	3,529	43	25	41	66	30	0	139	6,051			
鳴瀬川L-6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
鳴瀬川L-7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
鳴瀬川L-8	4,188	1,788	6,108	3,765	23	8	15,880	215	2	217	26,901	1,128	68	110	178	187	0	1,493	44,491			
鳴瀬川L-9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
鳴瀬川R-2	7,559	6,077	1,565	941	26	9	16,177	313	5	318	27,404	446	235	255	490	392	0	1,328	45,227			
鳴瀬川R-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
鳴瀬川R-4	756	395	78	33	9	3	1,274	141	1	142	2,158	24	18	28	46	14	0	84	3,658			
鳴瀬川R-5	498	262	439	246	5	2	1,452	41	0	41	2,460	86	11	13	24	26	0	136	4,089			
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
吉田川L-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
吉田川L-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
吉田川L-4	141	27	96	24	0	0	288	9	0	9	488	39	4	8	12	9	0	60	845			
吉田川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
吉田川R-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
吉田川R-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
吉田川R-4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
吉田川R-5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
吉田川R-6	36	7	5	3	0	0	51	14	0	14	86	4	1	2	3	2	0	9	160			
吉田川R-7	3	0	2	0	0	0	5	9	1	10	8	1	0	0	0	0	0	1	24			
合計	18,029	11,401	8,960	5,346	88	30	43,854	1,811	25	1,836	74,289	1,977	461	610	1,071	807	0	3,855	123,834			

様式ー3 被害額（事業実施前） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/20 （単位：百万円）

氾濫 ブロッ ク	一般資産被害額						農作物被害額			公共土木 施設等被害 額	営業停 止損失	家屋における 応急対策費用			事業所にお ける応 急対策費 用	その他の 間接被害	小計	合計	備考	
	家屋	家庭用 品	事業所資産		農漁家資産		小計	水稲	畑作物			小計	清掃労 働対価	代替活 動等						小計
			償却	在庫	償却	在庫														
鳴瀬川L-1	5,340	3,694	1,014	514	20	7	10,589	220	11	231	17,938	397	146	212	358	240	0	995	29,753	
鳴瀬川L-2	69	32	0	0	1	0	102	23	0	23	173	0	1	2	3	0	0	3	301	
鳴瀬川L-3	881	422	62	38	14	4	1,421	439	6	445	2,407	26	19	32	51	23	0	100	4,373	
鳴瀬川L-4	1,238	632	228	103	14	4	2,219	342	3	345	3,759	120	31	48	79	52	0	251	6,574	
鳴瀬川L-5	5,106	2,546	1,957	798	13	4	10,424	449	4	453	17,658	594	121	209	330	191	0	1,115	29,650	
鳴瀬川L-6	9,628	6,735	2,545	738	20	7	19,673	298	3	301	33,326	474	252	286	538	365	0	1,377	54,677	
鳴瀬川L-7	7,227	3,611	1,724	541	23	7	13,133	244	1	245	22,247	661	179	318	497	229	0	1,387	37,012	
鳴瀬川L-8	7,146	3,550	7,938	5,189	33	12	23,868	225	2	227	40,432	1,513	127	162	289	348	0	2,150	66,677	
鳴瀬川L-9	1,699	856	48	26	20	7	2,656	290	0	290	4,499	22	36	53	89	32	0	143	7,588	
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川R-2	10,253	7,837	2,218	1,375	43	14	21,740	452	7	459	36,828	597	298	313	611	544	0	1,752	60,779	
鳴瀬川R-3	5,535	4,320	383	188	45	16	10,487	448	9	457	17,765	115	153	198	351	135	0	601	29,310	
鳴瀬川R-4	1,222	920	127	57	20	7	2,353	171	1	172	3,986	32	32	43	75	26	0	133	6,644	
鳴瀬川R-5	1,191	614	644	389	9	3	2,850	49	1	50	4,828	133	22	23	45	54	0	232	7,960	
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川L-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川L-3	283	242	28	4	5	2	564	123	0	123	955	7	9	10	19	11	0	37	1,679	
吉田川L-4	525	131	422	127	1	0	1,206	16	0	16	2,043	194	12	22	34	40	0	268	3,533	
吉田川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川R-2	0	0	0	0	0	0	0	14	0	14	0	0	0	0	0	0	0	0	14	
吉田川R-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川R-4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川R-5	560	80	4	3	5	1	653	81	0	81	1,106	2	3	3	6	2	0	10	1,850	
吉田川R-6	67	29	13	8	1	0	118	70	0	70	200	6	2	3	5	4	0	15	403	
吉田川R-7	152	24	611	23	0	0	810	64	1	65	1,372	21	3	6	9	6	0	36	2,283	
合計	58,122	36,275	19,966	10,121	287	95	124,866	4,018	49	4,067	211,523	4,914	1,446	1,943	3,389	2,302	0	10,605	351,061	

様式ー3		被害額（事業実施前）						水系名：鳴瀬川水系				河川名：鳴瀬川・吉				流量規模：1/30		（単位：百万円）			
氾濫 ブロッ ク	一般資産被害額						農作物被害額			公共土木 施設等被害 額	営業停 止損失	家屋における 応急対策費用			事業所にお ける応 急対策費 用	その他の 間接被害	小計	合計	備考		
	家屋	家庭用 品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労 働対価	代替活 動等						小計	
			償却	在庫	償却	在庫															
鳴瀬川L-1	7,350	5,055	1,392	701	28	9	14,535	251	17	268	24,622	510	195	277	472	321	0	1,303	40,728		
鳴瀬川L-2	305	129	0	0	1	0	435	28	0	28	737	0	5	4	9	0	0	9	1,209		
鳴瀬川L-3	1,173	594	72	45	20	6	1,910	454	6	460	3,236	30	24	38	62	30	0	122	5,728		
鳴瀬川L-4	1,360	751	281	131	16	5	2,544	408	3	411	4,310	130	34	53	87	58	0	275	7,540		
鳴瀬川L-5	8,091	5,339	3,264	1,278	23	8	18,003	515	5	520	30,497	847	202	326	528	357	0	1,732	50,752		
鳴瀬川L-6	11,569	8,023	3,005	897	25	8	23,527	328	3	331	39,855	578	296	328	624	456	0	1,658	65,371		
鳴瀬川L-7	11,227	6,269	2,572	899	32	11	21,010	267	1	268	35,591	843	257	437	694	319	0	1,856	58,725		
鳴瀬川L-8	9,752	4,600	9,697	7,139	41	14	31,243	227	2	229	52,926	2,008	166	189	355	476	0	2,839	87,237		
鳴瀬川L-9	2,031	1,059	65	36	25	8	3,224	314	2	316	5,461	26	42	60	102	43	0	171	9,172		
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-2	13,202	10,127	2,365	1,537	52	17	27,300	523	8	531	46,246	673	366	340	706	642	0	2,021	76,098		
鳴瀬川R-3	7,900	5,919	446	224	63	20	14,572	462	9	471	24,685	131	211	233	444	179	0	754	40,482		
鳴瀬川R-4	1,414	1,053	188	89	22	8	2,774	182	2	184	4,699	48	38	50	88	34	0	170	7,827		
鳴瀬川R-5	1,950	904	721	423	12	4	4,014	60	1	61	6,800	159	34	32	66	82	0	307	11,182		
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-2	836	473	58	31	7	2	1,407	166	2	168	2,383	20	16	22	38	29	0	87	4,045		
吉田川L-3	365	308	41	6	8	2	730	140	0	140	1,237	9	11	11	22	14	0	45	2,152		
吉田川L-4	789	253	650	197	1	0	1,890	19	0	19	3,202	243	16	30	46	55	0	344	5,455		
吉田川R-1	830	478	40	49	12	4	1,413	53	2	55	2,394	16	17	17	34	27	0	77	3,939		
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15		
吉田川R-3	1,528	786	79	57	14	4	2,468	80	0	80	4,181	26	28	21	49	57	0	132	6,861		
吉田川R-4	0	0	0	0	0	0	0	45	1	46	0	0	0	0	0	0	0	0	46		
吉田川R-5	690	119	9	11	5	2	836	84	0	84	1,416	3	4	4	8	6	0	17	2,353		
吉田川R-6	172	72	135	25	1	0	405	83	0	83	686	25	5	8	13	15	0	53	1,227		
吉田川R-7	264	28	1,083	57	0	0	1,432	76	1	77	2,426	40	3	6	9	11	0	60	3,995		
合計	82,798	52,339	26,163	13,832	408	132	175,672	4,780	65	4,845	297,588	6,365	1,970	2,486	4,456	3,211	0	14,032	492,137		

様式ー3		被害額（事業実施前）						水系名：鳴瀬川水系				河川名：鳴瀬川・吉				流量規模：1/50		（単位：百万円）			
氾濫 ブロッ ク	一般資産被害額						農作物被害額			公共土木 施設等被害 額	営業停 止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の 間接被害	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物			小計	清掃労働 対価	代替活動等						小計	
			償却	在庫	償却	在庫															
鳴瀬川L-1	10,813	7,186	1,833	882	44	14	20,772	300	22	322	35,188	681	307	469	776	436	0	1,893	58,175		
鳴瀬川L-2	356	145	0	0	2	1	504	30	0	30	854	0	5	4	9	0	0	9	1,397		
鳴瀬川L-3	1,588	930	99	73	31	10	2,731	478	8	486	4,626	38	33	49	82	46	0	166	8,009		
鳴瀬川L-4	1,525	910	311	148	18	6	2,918	497	6	503	4,943	137	40	60	100	67	0	304	8,668		
鳴瀬川L-5	10,069	7,056	4,389	1,866	30	10	23,420	550	5	555	39,673	995	256	379	635	452	0	2,082	65,730		
鳴瀬川L-6	13,555	9,234	3,143	991	32	10	26,965	353	4	357	45,679	619	334	356	690	496	0	1,805	74,806		
鳴瀬川L-7	16,621	9,670	4,197	1,592	42	14	32,136	290	2	292	54,438	1,524	393	635	1,028	496	0	3,048	89,914		
鳴瀬川L-8	12,080	5,301	9,974	7,498	50	16	34,919	230	2	232	59,153	2,217	192	201	393	528	0	3,138	97,442		
鳴瀬川L-9	2,785	1,537	84	44	32	11	4,493	343	2	345	7,611	33	57	71	128	60	0	221	12,670		
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-2	15,935	11,247	2,488	1,699	73	22	31,464	675	12	687	53,300	752	405	369	774	732	0	2,258	87,709		
鳴瀬川R-3	11,570	7,964	601	319	86	25	20,565	471	10	481	34,837	180	286	273	559	268	0	1,007	56,890		
鳴瀬川R-4	2,295	1,532	276	142	29	10	4,284	211	2	213	7,257	66	57	64	121	60	0	247	12,001		
鳴瀬川R-5	2,579	1,160	835	539	17	5	5,135	66	1	67	8,699	207	42	38	80	102	0	389	14,290		
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-2	1,191	599	77	43	8	3	1,921	224	2	226	3,254	26	21	26	47	40	0	113	5,514		
吉田川L-3	505	431	76	13	10	3	1,038	175	0	175	1,758	14	15	16	31	21	0	66	3,037		
吉田川L-4	1,022	378	831	258	2	1	2,492	19	0	19	4,221	280	19	34	53	69	0	402	7,134		
吉田川R-1	1,147	567	46	63	13	4	1,840	53	2	55	3,117	22	21	19	40	33	0	95	5,107		
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15		
吉田川R-3	2,240	1,023	117	85	18	5	3,488	89	1	90	5,909	42	39	31	70	99	0	211	9,698		
吉田川R-4	27	24	1	1	1	0	54	49	2	51	91	0	1	2	3	1	0	4	200		
吉田川R-5	748	127	12	14	5	2	908	86	0	86	1,538	5	5	5	10	7	0	22	2,554		
吉田川R-6	453	276	531	65	5	1	1,331	116	0	116	2,255	44	11	16	27	34	0	105	3,807		
吉田川R-7	269	31	1,084	58	0	0	1,442	85	1	86	2,443	41	4	7	11	12	0	64	4,035		
合計	109,373	67,328	31,005	16,393	548	173	224,820	5,405	84	5,489	380,845	7,923	2,543	3,124	5,667	4,059	0	17,649	628,803		

様式ー3		被害額（事業実施前）						水系名：鳴瀬川水系				河川名：鳴瀬川・吉				流量規模：1/80				（単位：百万円）		
記差 ブ ロ ッ ク	一般資産被害額						農作物被害額			公共土木 施設等被害 額	営業停 止損失	家屋における 応急対策費用			事業所 における 応急対策 費用	その他の 間接被害	小計	合計	備考			
	家屋	家庭用 品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労 働対価	代替活 動等						小計		
			償却	在庫	償却	在庫																
鳴瀬川L-1	13,283	8,996	2,180	1,021	60	19	25,559	334	25	359	43,297	803	374	565	939	526	0	2,268	71,483			
鳴瀬川L-2	356	145	0	0	2	1	504	30	0	30	854	0	5	4	9	0	0	9	1,397			
鳴瀬川L-3	1,748	1,127	105	78	35	12	3,105	482	9	491	5,260	40	40	55	95	52	0	187	9,043			
鳴瀬川L-4	1,844	973	364	172	18	6	3,377	598	8	606	5,721	163	48	77	125	82	0	370	10,074			
鳴瀬川L-5	12,806	9,409	5,868	2,594	36	13	30,726	557	5	562	52,050	1,224	337	443	780	642	0	2,646	85,984			
鳴瀬川L-6	14,523	9,631	3,220	1,030	34	11	28,449	373	4	377	48,193	642	347	366	713	517	0	1,872	78,891			
鳴瀬川L-7	22,164	14,150	5,798	2,318	51	18	44,499	303	2	305	75,381	1,862	560	867	1,427	678	0	3,967	124,152			
鳴瀬川L-8	12,159	5,361	9,995	7,507	52	16	35,090	232	2	234	59,442	2,221	195	203	398	534	0	3,153	97,919			
鳴瀬川L-9	3,229	1,798	103	56	38	13	5,237	364	2	366	8,871	38	65	78	143	69	0	250	14,724			
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
鳴瀬川R-2	18,251	12,037	2,656	1,845	86	27	34,902	711	13	724	59,124	854	441	406	847	810	0	2,511	97,261			
鳴瀬川R-3	15,441	9,877	781	405	98	28	26,630	473	10	483	45,111	247	355	306	661	348	0	1,256	73,480			
鳴瀬川R-4	2,499	1,612	300	160	31	10	4,612	231	2	233	7,813	72	62	68	130	64	0	266	12,924			
鳴瀬川R-5	3,442	1,503	909	585	22	6	6,467	71	1	72	10,955	247	52	45	97	118	0	462	17,956			
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
吉田川L-2	1,216	604	78	44	8	3	1,953	249	3	252	3,308	26	22	26	48	40	0	114	5,627			
吉田川L-3	732	548	121	25	13	4	1,443	183	0	183	2,444	22	20	19	39	29	0	90	4,160			
吉田川L-4	1,310	691	1,272	433	4	1	3,711	22	0	22	6,286	342	27	42	69	98	0	509	10,528			
吉田川R-1	1,421	651	47	68	16	5	2,208	53	2	55	3,740	24	23	19	42	38	0	104	6,107			
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15			
吉田川R-3	2,323	1,057	122	88	19	5	3,614	92	1	93	6,122	43	40	33	73	100	0	216	10,045			
吉田川R-4	27	24	1	1	1	0	54	50	2	52	91	0	1	2	3	1	0	4	201			
吉田川R-5	1,152	215	56	30	7	2	1,462	88	0	88	2,477	20	9	11	20	17	0	57	4,084			
吉田川R-6	1,324	607	998	141	8	3	3,081	186	0	186	5,219	80	23	29	52	54	0	186	8,672			
吉田川R-7	283	34	1,090	60	0	0	1,467	87	1	88	2,485	42	4	7	11	13	0	66	4,106			
合計	131,533	81,050	36,064	18,661	639	203	268,150	5,784	92	5,876	454,246	9,012	3,050	3,671	6,721	4,830	0	20,563	748,835			

様式ー3		被害額（事業実施前）						水系名：鳴瀬川水系				河川名：鳴瀬川・吉				流量規模：1/100		（単位：百万円）			
氾濫 ブロッ ク	一般資産被害額						農作物被害額			公共土木 施設等被害 額	営業停 止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の 間接被害	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労働 対価	代替活動 等						小計	
			償却	在庫	償却	在庫															
鳴瀬川L-1	13,840	9,444	2,262	1,041	64	20	26,671	347	26	373	45,181	818	386	581	967	538	0	2,323	74,548		
鳴瀬川L-2	356	145	0	0	2	1	504	30	0	30	854	0	5	4	9	0	0	9	1,397		
鳴瀬川L-3	1,862	1,249	141	104	39	13	3,408	482	9	491	5,773	45	44	58	102	60	0	207	9,879		
鳴瀬川L-4	2,017	1,088	378	175	22	7	3,687	612	8	620	6,246	172	52	83	135	90	0	397	10,950		
鳴瀬川L-5	14,339	10,672	7,122	3,647	40	14	35,834	561	5	566	60,703	1,441	385	476	861	774	0	3,076	100,179		
鳴瀬川L-6	15,686	10,177	3,351	1,100	36	11	30,361	386	6	392	51,432	709	370	385	755	551	0	2,015	84,200		
鳴瀬川L-7	26,914	17,377	7,503	3,039	59	21	54,913	307	2	309	93,023	2,203	656	973	1,629	860	0	4,692	152,937		
鳴瀬川L-8	12,629	5,741	10,077	7,554	52	17	36,070	232	2	234	61,103	2,237	211	212	423	571	0	3,231	100,638		
鳴瀬川L-9	3,249	1,842	104	57	39	13	5,304	367	2	369	8,985	38	66	79	145	70	0	253	14,911		
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-2	19,319	12,418	2,680	1,874	101	30	36,422	718	13	731	61,699	862	452	411	863	824	0	2,549	101,401		
鳴瀬川R-3	16,232	10,375	798	416	100	29	27,950	475	11	486	47,347	254	370	315	685	364	0	1,303	77,086		
鳴瀬川R-4	2,540	1,743	357	191	31	11	4,873	234	2	236	8,255	80	65	71	136	71	0	287	13,651		
鳴瀬川R-5	3,962	1,685	999	632	22	6	7,306	72	1	73	12,376	263	60	49	109	140	0	512	20,267		
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-2	1,354	648	86	50	8	3	2,149	249	3	252	3,640	29	24	27	51	46	0	126	6,167		
吉田川L-3	809	606	142	33	15	5	1,610	192	0	192	2,727	32	23	22	45	35	0	112	4,641		
吉田川L-4	1,410	773	1,423	488	4	1	4,099	28	0	28	6,944	376	29	44	73	117	0	566	11,637		
吉田川R-1	1,564	748	49	74	18	5	2,458	54	2	56	4,164	26	26	20	46	40	0	112	6,790		
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15		
吉田川R-3	2,392	1,117	123	89	19	5	3,745	92	1	93	6,344	44	42	35	77	101	0	222	10,404		
吉田川R-4	34	55	1	1	1	0	92	51	3	54	156	1	2	2	4	2	0	7	309		
吉田川R-5	1,258	294	82	39	8	2	1,683	88	0	88	2,851	24	11	14	25	20	0	69	4,691		
吉田川R-6	1,614	766	1,024	157	10	3	3,574	190	0	190	6,054	87	28	32	60	65	0	212	10,030		
吉田川R-7	296	38	1,124	74	1	0	1,533	89	1	90	2,597	46	4	7	11	15	0	72	4,292		
合計	143,676	89,001	39,826	20,835	691	217	294,246	5,871	97	5,968	498,453	9,787	3,311	3,900	7,211	5,354	0	22,352	821,019		

様式-3 被害額（現時点） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/5 （単位：百万円）

[illegible]

様式ー3		被害額（現時点）						水系名：鳴瀬川水系				河川名：鳴瀬川・吉				流量規模：1/10		（単位：百万円）			
氾濫 ブロッ ク	一般資産被害額							農作物被害額			公共土木 施設等被 害額	営業停 止損失	家屋における 応急対策費用			事業所にお ける応 急対策費 用	その他の 間接被害	小計	合計	備考	
	家屋	家庭用 品	事業所資産		農漁家資産		小計	水稻	畑作物	小計											
			償却	在庫	償却	在庫															
鳴瀬川L-1	2,581	1,773	398	234	10	3	4,999	112	8	120	8,468	130	77	115	192	118	0	440	14,027		
鳴瀬川L-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川L-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川L-4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川L-5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川L-6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川L-7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川L-8	4,097	1,720	6,089	3,751	22	8	15,687	214	2	216	26,574	1,126	66	107	173	185	0	1,484	43,961		
鳴瀬川L-9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-5	498	262	439	246	5	2	1,452	41	0	41	2,460	86	11	13	24	26	0	136	4,089		
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-4	29	12	26	4	0	0	71	5	0	5	120	10	2	3	5	3	0	18	214		
吉田川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川R-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川R-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川R-4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川R-5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川R-6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川R-7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
合計	7,205	3,767	6,952	4,235	37	13	22,209	372	10	382	37,622	1,352	156	238	394	332	0	2,078	62,291		

様式－３		被害額（現時点）						水系名：鳴瀬川水系				河川名：鳴瀬川・吉				流量規模：1/20		（単位：百万円）			
氾濫 ブロッ ク	一般資産被害額								農作物被害額			公共土木 施設等被 害額	営業停 止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の 間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働 対価			代替活動等	小計						
			償却	在庫	償却	在庫															
鳴瀬川L-1	5,805	4,155	1,067	545	23	8	11,603	222	11	233	19,655	414	159	230	389	260	0	1,063	32,554		
鳴瀬川L-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川L-3	685	348	53	31	12	4	1,133	429	5	434	1,919	21	15	26	41	17	0	79	3,565		
鳴瀬川L-4	1,254	694	243	111	15	5	2,322	334	2	336	3,933	123	32	50	82	54	0	259	6,850		
鳴瀬川L-5	4,925	2,393	1,881	775	12	4	9,990	449	4	453	16,923	584	118	203	321	183	0	1,088	28,454		
鳴瀬川L-6	9,716	6,777	2,562	745	20	7	19,827	302	3	305	33,587	484	254	290	544	370	0	1,398	55,117		
鳴瀬川L-7	7,193	3,594	1,720	539	23	7	13,076	242	1	243	22,151	659	178	317	495	227	0	1,381	36,851		
鳴瀬川L-8	6,937	3,339	7,890	5,161	33	12	23,372	223	2	225	39,592	1,502	116	157	273	326	0	2,101	65,290		
鳴瀬川L-9	1,747	898	50	27	22	7	2,751	294	0	294	4,660	23	37	55	92	33	0	148	7,853		
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-2	6,638	2,112	373	342	40	13	9,518	272	7	279	16,123	98	76	78	154	108	0	360	26,280		
鳴瀬川R-3	5,608	4,487	392	190	46	16	10,739	451	9	460	18,192	116	157	202	359	139	0	614	30,005		
鳴瀬川R-4	1,170	778	113	50	18	6	2,135	169	1	170	3,617	29	29	39	68	21	0	118	6,040		
鳴瀬川R-5	1,191	614	644	389	9	3	2,850	49	1	50	4,828	133	22	23	45	54	0	232	7,960		
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-3	211	176	21	3	4	1	416	118	0	118	705	6	7	9	16	9	0	31	1,270		
吉田川L-4	386	83	315	98	0	0	882	14	0	14	1,494	138	9	18	27	27	0	192	2,582		
吉田川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川R-2	0	0	0	0	0	0	0	14	0	14	0	0	0	0	0	0	0	0	14		
吉田川R-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川R-4	0	0	0	0	0	0	0	42	1	43	0	0	0	0	0	0	0	0	43		
吉田川R-5	560	80	4	3	5	1	653	79	0	79	1,106	2	3	3	6	2	0	10	1,848		
吉田川R-6	67	29	13	8	1	0	118	69	0	69	200	6	2	3	5	4	0	15	402		
吉田川R-7	145	21	611	23	0	0	800	62	1	63	1,355	20	3	5	8	6	0	34	2,252		
合計	54,238	30,578	17,952	9,040	283	94	112,185	3,834	48	3,882	190,041	4,358	1,217	1,708	2,925	1,840	0	9,123	315,231		

様式ー3		被害額（現時点）						水系名：鳴瀬川水系				河川名：鳴瀬川・吉				流量規模：1/30			（単位：百万円）		
氾濫 ブロッ ク	一般資産被害額						農作物被害額				公共土木 施設等被害 額	営業停 止損失	家屋における 応急対策費用			事業所にお ける応 急対策費 用	その他の 間接被害	小計	合計	備考	
	家屋	家庭用 品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替活 動等	小計						
			償却	在庫	償却	在庫															
鳴瀬川L-1	7,994	5,453	1,456	727	29	10	15,669	255	19	274	26,543	536	216	307	523	345	0	1,404	43,890		
鳴瀬川L-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川L-3	1,096	508	68	42	17	5	1,736	449	6	455	2,941	29	21	35	56	28	0	113	5,245		
鳴瀬川L-4	1,360	751	281	131	16	5	2,544	401	3	404	4,310	130	34	53	87	58	0	275	7,533		
鳴瀬川L-5	7,907	5,286	3,223	1,257	23	8	17,704	514	5	519	29,991	829	196	321	517	341	0	1,687	49,901		
鳴瀬川L-6	11,569	8,023	3,005	897	25	8	23,527	330	3	333	39,855	578	296	328	624	456	0	1,658	65,373		
鳴瀬川L-7	10,961	6,001	2,507	872	32	11	20,384	266	1	267	34,530	835	250	429	679	311	0	1,825	57,006		
鳴瀬川L-8	9,623	4,417	9,658	7,122	40	14	30,874	227	2	229	52,301	2,001	161	183	344	466	0	2,811	86,215		
鳴瀬川L-9	2,206	1,167	67	37	28	9	3,514	321	2	323	5,953	27	45	62	107	45	0	179	9,969		
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-2	7,307	2,447	394	367	46	15	10,576	466	8	474	17,916	110	87	90	177	116	0	403	29,369		
鳴瀬川R-3	8,102	6,064	455	227	63	20	14,931	464	9	473	25,293	132	218	237	455	186	0	773	41,470		
鳴瀬川R-4	1,414	1,053	188	89	22	8	2,774	182	2	184	4,699	48	38	50	88	34	0	170	7,827		
鳴瀬川R-5	1,950	904	721	423	12	4	4,014	60	1	61	6,800	159	34	32	66	82	0	307	11,182		
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-2	820	461	58	31	7	2	1,379	166	2	168	2,336	20	16	22	38	28	0	86	3,969		
吉田川L-3	362	306	34	5	8	2	717	138	0	138	1,215	9	11	11	22	14	0	45	2,115		
吉田川L-4	525	131	422	127	1	0	1,206	17	0	17	2,043	194	12	22	34	40	0	268	3,534		
吉田川R-1	830	478	40	49	12	4	1,413	53	2	55	2,394	16	17	17	34	27	0	77	3,939		
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15		
吉田川R-3	1,505	783	79	57	14	4	2,442	80	0	80	4,137	26	28	21	49	57	0	132	6,791		
吉田川R-4	0	0	0	0	0	0	0	45	1	46	0	0	0	0	0	0	0	0	46		
吉田川R-5	622	103	7	7	5	1	745	83	0	83	1,262	3	4	3	7	4	0	14	2,104		
吉田川R-6	109	57	21	14	1	0	202	77	0	77	342	8	3	4	7	7	0	22	643		
吉田川R-7	256	25	1,082	57	0	0	1,420	74	1	75	2,405	39	3	6	9	10	0	58	3,958		
合計	76,518	44,418	23,766	12,538	401	130	157,771	4,683	67	4,750	267,264	5,729	1,690	2,233	3,923	2,655	0	12,307	442,092		

様式－３		被害額（現時点）						水系名：鳴瀬川水系				河川名：鳴瀬川・吉				流量規模：1/50		（単位：百万円）			
氾濫 ブロッ ク	一般資産被害額						農作物被害額			公共土木 施設等被害額	営業停 止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の 間接被害	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物			小計	清掃労働 対価	代替活動等						小計	
			償却	在庫	償却	在庫															
鳴瀬川L-1	11,033	7,244	1,890	900	44	14	21,125	301	22	323	35,786	703	314	483	797	447	0	1,947	59,181		
鳴瀬川L-2	356	145	0	0	2	1	504	29	0	29	854	0	5	4	9	0	0	9	1,396		
鳴瀬川L-3	1,343	778	83	54	26	9	2,293	469	8	477	3,884	33	29	44	73	38	0	144	6,798		
鳴瀬川L-4	1,510	898	310	148	18	6	2,890	491	6	497	4,896	137	39	60	99	67	0	303	8,586		
鳴瀬川L-5	9,686	6,829	4,259	1,804	30	10	22,618	547	5	552	38,315	978	245	373	618	436	0	2,032	63,517		
鳴瀬川L-6	13,555	9,234	3,143	991	32	10	26,965	353	4	357	45,679	619	334	356	690	496	0	1,805	74,806		
鳴瀬川L-7	16,621	9,670	4,197	1,592	42	14	32,136	290	2	292	54,438	1,524	393	635	1,028	496	0	3,048	89,914		
鳴瀬川L-8	12,080	5,301	9,974	7,498	50	16	34,919	230	2	232	59,153	2,217	192	201	393	528	0	3,138	97,442		
鳴瀬川L-9	2,884	1,600	88	46	33	11	4,662	350	2	352	7,897	34	59	74	133	62	0	229	13,140		
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-2	8,770	3,047	456	464	62	20	12,819	607	12	619	21,715	139	107	112	219	146	0	504	35,657		
鳴瀬川R-3	12,594	8,689	614	327	88	26	22,338	471	10	481	37,841	185	306	281	587	282	0	1,054	61,714		
鳴瀬川R-4	2,289	1,519	275	141	29	10	4,263	210	2	212	7,222	66	57	63	120	59	0	245	11,942		
鳴瀬川R-5	2,579	1,160	835	539	17	5	5,135	66	1	67	8,699	207	42	38	80	102	0	389	14,290		
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-2	1,191	599	77	43	8	3	1,921	224	2	226	3,254	26	21	26	47	40	0	113	5,514		
吉田川L-3	423	393	64	11	10	3	904	171	0	171	1,531	13	14	15	29	18	0	60	2,666		
吉田川L-4	899	318	739	231	2	1	2,190	19	0	19	3,710	257	17	32	49	60	0	366	6,285		
吉田川R-1	1,147	567	46	63	13	4	1,840	53	2	55	3,117	22	21	19	40	33	0	95	5,107		
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15		
吉田川R-3	2,292	1,030	118	86	18	5	3,549	90	1	91	6,012	43	40	32	72	99	0	214	9,866		
吉田川R-4	27	24	1	1	1	0	54	49	2	51	91	0	1	2	3	1	0	4	200		
吉田川R-5	748	127	12	14	5	2	908	86	0	86	1,538	5	5	5	10	7	0	22	2,554		
吉田川R-6	415	214	515	57	4	1	1,206	109	0	109	2,043	40	9	14	23	28	0	91	3,449		
吉田川R-7	269	31	1,084	58	0	0	1,442	82	1	83	2,443	41	4	7	11	12	0	64	4,032		
合計	102,711	59,417	28,780	15,068	534	171	206,681	5,312	84	5,396	350,118	7,289	2,254	2,876	5,130	3,457	0	15,876	578,071		

様式ー3		被害額（現時点）						水系名：鳴瀬川水系				河川名：鳴瀬川・吉				流量規模：1/80				（単位：百万円）			
記 差 ブ ロ ッ ク	一般資産被害額								農作物被害額			公共土木 施設等被害 額	営業停 止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の 間接被害	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計													
			償却	在庫	償却	在庫																	
											清掃労働 対価			代替活動 等	小計								
鳴瀬川L-1	13,879	9,492	2,298	1,062	63	20	26,814	342	25	367	45,423	825	387	581	968	552	0	2,345	74,949				
鳴瀬川L-2	367	147	0	0	2	1	517	30	0	30	876	0	5	4	9	0	0	9	1,432				
鳴瀬川L-3	1,630	1,046	103	76	32	11	2,898	479	9	488	4,909	39	36	52	88	49	0	176	8,471				
鳴瀬川L-4	1,928	1,037	371	173	21	7	3,537	563	8	571	5,992	168	49	79	128	85	0	381	10,481				
鳴瀬川L-5	12,771	9,346	5,828	2,581	36	12	30,574	557	5	562	51,792	1,218	335	441	776	639	0	2,633	85,561				
鳴瀬川L-6	15,073	9,945	3,236	1,053	35	11	29,353	374	5	379	49,724	653	357	372	729	527	0	1,909	81,365				
鳴瀬川L-7	22,136	14,054	5,793	2,316	51	18	44,368	302	2	304	75,159	1,861	558	865	1,423	676	0	3,960	123,791				
鳴瀬川L-8	12,159	5,361	9,995	7,507	52	16	35,090	232	2	234	59,442	2,221	195	203	398	534	0	3,153	97,919				
鳴瀬川L-9	3,240	1,825	104	57	38	13	5,277	364	2	366	8,939	38	66	79	145	70	0	253	14,835				
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
鳴瀬川R-2	10,418	3,641	504	523	74	24	15,184	640	13	653	25,722	156	133	131	264	182	0	602	42,161				
鳴瀬川R-3	15,553	9,914	782	405	98	28	26,780	473	10	483	45,365	247	356	306	662	349	0	1,258	73,886				
鳴瀬川R-4	2,467	1,605	297	158	31	10	4,568	223	2	225	7,738	71	61	66	127	63	0	261	12,792				
鳴瀬川R-5	3,442	1,503	909	585	22	6	6,467	71	1	72	10,955	247	52	45	97	118	0	462	17,956				
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
吉田川L-2	1,354	648	86	50	8	3	2,149	249	3	252	3,640	29	24	27	51	46	0	126	6,167				
吉田川L-3	725	544	104	21	13	4	1,411	181	0	181	2,390	20	20	19	39	28	0	87	4,069				
吉田川L-4	1,310	691	1,272	433	4	1	3,711	21	0	21	6,286	342	27	42	69	98	0	509	10,527				
吉田川R-1	1,421	651	47	68	16	5	2,208	53	2	55	3,740	24	23	19	42	38	0	104	6,107				
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15				
吉田川R-3	2,323	1,057	122	88	19	5	3,614	92	1	93	6,122	43	40	33	73	100	0	216	10,045				
吉田川R-4	34	55	1	1	1	0	92	50	2	52	156	1	2	2	4	2	0	7	307				
吉田川R-5	1,017	187	54	27	6	2	1,293	88	0	88	2,190	19	9	11	20	14	0	53	3,624				
吉田川R-6	1,001	500	972	125	7	2	2,607	165	0	165	4,416	68	19	25	44	48	0	160	7,348				
吉田川R-7	283	34	1,090	60	0	0	1,467	86	1	87	2,485	42	4	7	11	13	0	66	4,105				
合計	124,531	73,283	33,968	17,369	629	199	249,979	5,650	93	5,743	423,464	8,332	2,758	3,409	6,167	4,231	0	18,730	697,916				

様式－３ 被害額（現時点） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/100 （単位：百万円）

氾濫 ブロッ ク	一般資産被害額							農作物被害額			公共土木 施設等被 害額	営業停 止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の 間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替活動等	小計					
			償却	在庫	償却	在庫														
鳴瀬川L-1	14,878	10,681	2,468	1,123	68	22	29,240	366	27	393	49,533	879	430	647	1,077	589	0	2,545	81,711	
鳴瀬川L-2	367	147	0	0	2	1	517	30	0	30	876	0	5	4	9	0	0	9	1,432	
鳴瀬川L-3	1,650	1,063	103	76	34	11	2,937	481	9	490	4,975	39	37	52	89	49	0	177	8,579	
鳴瀬川L-4	1,972	1,059	377	174	21	7	3,610	603	8	611	6,115	171	50	80	130	86	0	387	10,723	
鳴瀬川L-5	14,206	10,574	7,114	3,643	39	14	35,590	561	5	566	60,289	1,439	383	472	855	772	0	3,066	99,511	
鳴瀬川L-6	15,742	10,205	3,368	1,105	36	11	30,467	389	6	395	51,611	712	370	386	756	553	0	2,021	84,494	
鳴瀬川L-7	26,914	17,377	7,503	3,039	59	21	54,913	307	2	309	93,023	2,203	656	973	1,629	860	0	4,692	152,937	
鳴瀬川L-8	12,629	5,741	10,077	7,554	52	17	36,070	232	2	234	61,103	2,237	211	212	423	571	0	3,231	100,638	
鳴瀬川L-9	3,386	1,960	126	68	42	14	5,596	372	2	374	9,480	41	69	83	152	72	0	265	15,715	
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川R-2	11,569	4,060	528	552	89	28	16,826	643	13	656	28,503	163	145	136	281	197	0	641	46,626	
鳴瀬川R-3	16,879	10,607	867	471	103	29	28,956	475	11	486	49,051	269	380	320	700	375	0	1,344	79,837	
鳴瀬川R-4	2,512	1,620	301	161	31	11	4,636	234	2	236	7,853	73	62	68	130	64	0	267	12,992	
鳴瀬川R-5	3,932	1,678	999	632	22	6	7,269	72	1	73	12,314	263	59	49	108	140	0	511	20,167	
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川L-2	1,354	648	86	50	8	3	2,149	249	3	252	3,640	29	24	27	51	46	0	126	6,167	
吉田川L-3	754	577	131	30	14	4	1,510	184	0	184	2,558	23	21	20	41	31	0	95	4,347	
吉田川L-4	1,310	691	1,272	433	4	1	3,711	22	0	22	6,286	342	27	42	69	98	0	509	10,528	
吉田川R-1	1,564	748	49	74	18	5	2,458	54	2	56	4,164	26	26	20	46	40	0	112	6,790	
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15	
吉田川R-3	2,467	1,123	124	89	19	5	3,827	92	1	93	6,483	46	42	35	77	101	0	224	10,627	
吉田川R-4	34	55	1	1	1	0	92	51	3	54	156	1	2	2	4	2	0	7	309	
吉田川R-5	1,152	215	56	30	7	2	1,462	88	0	88	2,477	20	9	11	20	17	0	57	4,084	
吉田川R-6	1,337	621	998	141	9	3	3,109	186	0	186	5,267	80	23	29	52	54	0	186	8,748	
吉田川R-7	283	34	1,090	60	0	0	1,467	87	1	88	2,485	42	4	7	11	13	0	66	4,106	
合計	136,891	81,484	37,638	19,506	678	215	276,412	5,793	98	5,891	468,242	9,098	3,035	3,675	6,710	4,730	0	20,538	771,083	

様式-3 被害額（当面） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/5 （単位：百万円）

[illegible]

様式-3 被害額（当面） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/10 （単位：百万円）

[illegible]

様式－３ 被害額（当面） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/20 （単位：百万円）

記 添 ブ ロ ッ ク	一般資産被害額							農作物被害額			公共土木 施設等被害 額	営業停 止損失	家屋における 応急対策費用			事業所にお ける応 急対策費 用	その他の 間接被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対 価	代替活動等	小計						
			償却	在庫	償却	在庫															
鳴瀬川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川L-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川L-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川L-4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川L-5	4,366	2,024	1,715	735	11	4	8,855	446	4	450	15,000	556	105	180	285	165	0	1,006	25,311		
鳴瀬川L-6	9,716	6,777	2,562	745	20	7	19,827	302	3	305	33,587	484	254	290	544	370	0	1,398	55,117		
鳴瀬川L-7	7,149	3,591	1,607	515	23	7	12,892	242	1	243	21,839	648	178	317	495	222	0	1,365	36,339		
鳴瀬川L-8	6,055	3,082	7,653	4,996	30	10	21,826	221	2	223	36,973	1,449	104	144	248	289	0	1,986	61,008		
鳴瀬川L-9	1,747	898	50	27	22	7	2,751	294	0	294	4,660	23	37	55	92	33	0	148	7,853		
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川R-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川R-3	5,608	4,487	392	190	46	16	10,739	451	9	460	18,192	116	157	202	359	139	0	614	30,005		
鳴瀬川R-4	1,065	742	111	50	18	6	1,992	169	1	170	3,374	29	27	38	65	19	0	113	5,649		
鳴瀬川R-5	1,070	551	605	377	9	3	2,615	47	0	47	4,430	126	20	20	40	48	0	214	7,306		
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川L-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川L-3	173	161	20	3	4	1	362	112	0	112	613	5	6	8	14	7	0	26	1,113		
吉田川L-4	46	14	46	11	0	0	117	8	0	8	198	18	2	4	6	4	0	28	351		
吉田川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川R-2	0	0	0	0	0	0	0	14	0	14	0	0	0	0	0	0	0	0	0	14	
吉田川R-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川R-4	0	0	0	0	0	0	0	42	1	43	0	0	0	0	0	0	0	0	0	43	
吉田川R-5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川R-6	67	29	13	8	1	0	118	67	0	67	200	6	2	3	5	4	0	15	400		
吉田川R-7	0	0	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	
合計	37,062	22,356	14,774	7,657	184	61	82,094	2,416	21	2,437	139,067	3,460	892	1,261	2,153	1,300	0	6,913	230,511		

様式ー3 被害額（当面） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/30 （単位：百万円）

氾濫 ブロック	一般資産被害額						農作物被害額				公共土木 施設等被害額	営業停止 損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の 間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替活動等	小計					
			償却	在庫	償却	在庫														
鳴瀬川L-1	6,614	4,703	1,296	667	25	8	13,313	233	13	246	22,552	467	185	258	443	307	0	1,217	37,328	
鳴瀬川L-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川L-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川L-4	1,315	739	254	115	16	5	2,444	348	3	351	4,140	126	33	51	84	56	0	266	7,201	
鳴瀬川L-5	7,735	5,125	3,123	1,204	23	7	17,217	511	5	516	29,166	814	193	315	508	338	0	1,660	48,559	
鳴瀬川L-6	11,569	8,023	3,005	897	25	8	23,527	330	3	333	39,855	578	296	328	624	456	0	1,658	65,373	
鳴瀬川L-7	10,949	5,997	2,507	872	32	11	20,368	264	1	265	34,503	835	250	429	679	311	0	1,825	56,961	
鳴瀬川L-8	8,695	4,054	9,003	6,087	36	12	27,887	227	2	229	47,241	1,703	151	175	326	428	0	2,457	77,814	
鳴瀬川L-9	2,206	1,167	67	37	28	9	3,514	321	2	323	5,953	27	45	62	107	45	0	179	9,969	
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川R-2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川R-3	8,102	6,064	455	227	63	20	14,931	464	9	473	25,293	132	218	237	455	186	0	773	41,470	
鳴瀬川R-4	1,414	1,053	188	89	22	8	2,774	182	2	184	4,699	48	38	50	88	34	0	170	7,827	
鳴瀬川R-5	1,773	837	718	422	12	4	3,766	57	1	58	6,380	158	32	31	63	78	0	299	10,503	
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川L-2	778	445	52	25	7	2	1,309	166	2	168	2,217	19	15	21	36	26	0	81	3,775	
吉田川L-3	362	306	34	5	8	2	717	137	0	137	1,215	9	11	11	22	14	0	45	2,114	
吉田川L-4	303	58	267	86	0	0	714	15	0	15	1,210	121	8	15	23	23	0	167	2,106	
吉田川R-1	951	515	43	54	13	4	1,580	53	2	55	2,677	17	19	18	37	31	0	85	4,397	
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15	
吉田川R-3	1,748	844	86	63	15	4	2,760	85	0	85	4,675	31	31	23	54	69	0	154	7,674	
吉田川R-4	0	0	0	0	0	0	0	45	1	46	0	0	0	0	0	0	0	0	46	
吉田川R-5	580	95	5	5	5	1	691	83	0	83	1,171	2	3	3	6	3	0	11	1,956	
吉田川R-6	109	57	21	14	1	0	202	75	0	75	342	8	3	4	7	7	0	22	641	
吉田川R-7	35	10	30	12	0	0	87	27	1	28	147	14	1	3	4	3	0	21	283	
合計	65,238	40,092	21,154	10,881	331	105	137,801	3,638	47	3,685	233,435	5,109	1,532	2,034	3,566	2,415	0	11,090	386,011	

様式ー３ 被害額（当面） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/50 （単位：百万円）

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木 施設等被 害額	営業停 止損失	家屋における 応急対策費用				事業所に おける応 急対策費 用	その他の 間接被害	小計	合計	備考
	家屋	家庭用 品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労 働対価	代替活 動等	小計						
			償却	在庫	償却	在庫															
鳴瀬川L-1	9,463	6,403	1,636	814	38	12	18,366	284	22	306	31,112	606	263	390	653	389	0	1,648	51,432		
鳴瀬川L-2	356	145	0	0	2	1	504	29	0	29	854	0	5	4	9	0	0	9	1,396		
鳴瀬川L-3	1,094	490	68	42	17	5	1,716	443	6	449	2,907	29	21	35	56	28	0	113	5,185		
鳴瀬川L-4	1,502	895	310	148	18	6	2,879	471	6	477	4,877	136	39	59	98	66	0	300	8,533		
鳴瀬川L-5	9,686	6,829	4,259	1,804	30	10	22,618	547	5	552	38,315	978	245	373	618	436	0	2,032	63,517		
鳴瀬川L-6	13,555	9,234	3,143	991	32	10	26,965	353	4	357	45,679	619	334	356	690	496	0	1,805	74,806		
鳴瀬川L-7	16,401	9,361	4,169	1,579	42	14	31,566	290	2	292	53,473	1,517	385	628	1,013	491	0	3,021	88,352		
鳴瀬川L-8	12,080	5,301	9,974	7,498	50	16	34,919	230	2	232	59,153	2,217	192	201	393	528	0	3,138	97,442		
鳴瀬川L-9	2,884	1,600	88	46	33	11	4,662	350	2	352	7,897	34	59	74	133	62	0	229	13,140		
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-2	7,285	2,341	392	364	45	14	10,441	398	8	406	17,687	110	84	87	171	114	0	395	28,929		
鳴瀬川R-3	12,594	8,689	614	327	88	26	22,338	471	10	481	37,841	185	306	281	587	282	0	1,054	61,714		
鳴瀬川R-4	2,289	1,519	275	141	29	10	4,263	210	2	212	7,222	66	57	63	120	59	0	245	11,942		
鳴瀬川R-5	2,323	1,053	815	527	15	5	4,738	66	1	67	8,026	196	39	38	77	92	0	365	13,196		
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-2	1,182	597	77	43	8	3	1,910	207	2	209	3,236	26	21	26	47	40	0	113	5,468		
吉田川L-3	429	395	68	13	10	3	918	169	0	169	1,555	14	14	16	30	19	0	63	2,705		
吉田川L-4	584	164	468	139	1	0	1,356	18	0	18	2,297	199	13	23	36	43	0	278	3,949		
吉田川R-1	1,147	567	46	63	13	4	1,840	53	2	55	3,117	22	21	19	40	33	0	95	5,107		
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15		
吉田川R-3	2,292	1,030	118	86	18	5	3,549	90	1	91	6,012	43	40	32	72	99	0	214	9,866		
吉田川R-4	27	24	1	1	1	0	54	49	2	51	91	0	1	2	3	1	0	4	200		
吉田川R-5	690	119	9	11	5	2	836	84	0	84	1,416	3	4	4	8	6	0	17	2,353		
吉田川R-6	282	177	62	35	3	1	560	83	0	83	949	27	8	12	20	23	0	70	1,662		
吉田川R-7	101	10	337	21	0	0	469	44	1	45	794	23	1	3	4	4	0	31	1,339		
合計	98,246	56,943	26,929	14,693	498	158	197,467	4,954	78	5,032	334,509	7,050	2,152	2,726	4,878	3,311	0	15,239	552,247		

様式ー3 被害額（当面） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/80 （単位：百万円）

氾濫 ブロック	一般資産被害額						農作物被害額				公共土木 施設等被害額	営業停 止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の 間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計						
			償却	在庫	償却	在庫															
鳴瀬川L-1	13,288	8,897	2,179	1,017	60	19	25,460	319	24	343	43,129	801	367	551	918	524	0	2,243	71,175		
鳴瀬川L-2	367	147	0	0	2	1	517	30	0	30	876	0	5	4	9	0	0	9	1,432		
鳴瀬川L-3	1,353	857	85	54	27	9	2,385	465	8	473	4,040	32	30	46	76	38	0	146	7,044		
鳴瀬川L-4	1,657	997	342	160	21	7	3,184	517	7	524	5,394	152	42	64	106	72	0	330	9,432		
鳴瀬川L-5	12,701	9,110	5,669	2,480	35	12	30,007	556	5	561	50,832	1,199	330	436	766	634	0	2,599	83,999		
鳴瀬川L-6	15,105	9,950	3,248	1,057	35	11	29,406	376	6	382	49,814	661	358	373	731	530	0	1,922	81,524		
鳴瀬川L-7	21,901	13,739	5,723	2,290	50	17	43,720	302	2	304	74,062	1,845	551	857	1,408	668	0	3,921	122,007		
鳴瀬川L-8	12,159	5,361	9,995	7,507	52	16	35,090	232	2	234	59,442	2,221	195	203	398	534	0	3,153	97,919		
鳴瀬川L-9	3,240	1,825	104	57	38	13	5,277	364	2	366	8,939	38	66	79	145	70	0	253	14,835		
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
鳴瀬川R-2	8,685	2,975	453	461	60	19	12,653	588	11	599	21,434	138	106	110	216	143	0	497	35,183		
鳴瀬川R-3	15,678	9,960	830	450	99	29	27,046	474	10	484	45,816	256	358	309	667	353	0	1,276	74,622		
鳴瀬川R-4	2,467	1,605	297	158	31	10	4,568	223	2	225	7,738	71	61	66	127	63	0	261	12,792		
鳴瀬川R-5	3,442	1,503	909	585	22	6	6,467	71	1	72	10,955	247	52	45	97	118	0	462	17,956		
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
吉田川L-2	1,195	601	78	43	8	3	1,928	238	2	240	3,266	26	22	26	48	40	0	114	5,548		
吉田川L-3	686	519	101	21	12	4	1,343	181	0	181	2,275	19	19	18	37	26	0	82	3,881		
吉田川L-4	816	252	586	168	3	1	1,826	20	0	20	3,093	234	16	29	45	54	0	333	5,272		
吉田川R-1	1,559	746	48	73	18	5	2,449	53	2	55	4,149	25	26	20	46	40	0	111	6,764		
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15		
吉田川R-3	2,323	1,057	122	88	19	5	3,614	92	1	93	6,122	43	40	33	73	100	0	216	10,045		
吉田川R-4	34	55	1	1	1	0	92	50	2	52	156	1	2	2	4	2	0	7	307		
吉田川R-5	947	163	52	25	6	2	1,195	87	0	87	2,024	18	8	10	18	14	0	50	3,356		
吉田川R-6	685	412	268	83	7	2	1,457	117	0	117	2,468	50	16	22	38	40	0	128	4,170		
吉田川R-7	261	25	1,078	56	0	0	1,420	70	1	71	2,405	39	3	6	9	10	0	58	3,954		
合計	120,549	70,756	32,168	16,834	606	191	241,104	5,440	88	5,528	408,430	8,116	2,673	3,309	5,982	4,073	0	18,171	673,233		

様式－３ 被害額（当面） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/100 (単位：百万円)

氾濫 ブロック	一般資産被害額						農作物被害額			公共土木 施設等被害 額	営業停 止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の 間接被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労働対価	代替活動等						小計
			償却	在庫	償却	在庫														
鳴瀬川L-1	13,907	9,586	2,304	1,064	64	20	26,945	344	26	370	45,645	826	389	583	972	554	0	2,352	75,312	
鳴瀬川L-2	367	147	0	0	2	1	517	30	0	30	876	0	5	4	9	0	0	9	1,432	
鳴瀬川L-3	1,563	970	99	71	31	10	2,744	477	8	485	4,648	38	34	50	84	44	0	166	8,043	
鳴瀬川L-4	1,657	997	342	160	21	7	3,184	523	7	530	5,394	152	42	64	106	72	0	330	9,438	
鳴瀬川L-5	14,144	10,408	7,090	3,632	38	14	35,326	561	5	566	59,842	1,435	379	469	848	767	0	3,050	98,784	
鳴瀬川L-6	15,872	10,280	3,404	1,119	36	12	30,723	391	6	397	52,045	720	372	389	761	559	0	2,040	85,205	
鳴瀬川L-7	25,732	16,814	7,330	2,982	57	20	52,935	306	2	308	89,672	2,149	638	954	1,592	817	0	4,558	147,473	
鳴瀬川L-8	12,484	5,746	10,079	7,560	52	17	35,938	232	2	234	60,879	2,242	211	212	423	571	0	3,236	100,287	
鳴瀬川L-9	3,386	1,960	126	68	42	14	5,596	372	2	374	9,480	41	69	83	152	72	0	265	15,715	
鳴瀬川R-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
鳴瀬川R-2	9,484	3,346	479	493	67	22	13,891	633	12	645	23,531	149	121	123	244	164	0	557	38,624	
鳴瀬川R-3	16,935	10,623	871	474	103	30	29,036	475	11	486	49,187	270	381	321	702	375	0	1,347	80,056	
鳴瀬川R-4	2,584	1,658	327	182	31	11	4,793	234	2	236	8,119	77	64	69	133	66	0	276	13,424	
鳴瀬川R-5	3,871	1,667	991	628	22	6	7,185	72	1	73	12,171	262	59	49	108	140	0	510	19,939	
吉田川L-1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
吉田川L-2	1,354	648	86	50	8	3	2,149	247	3	250	3,640	29	24	27	51	46	0	126	6,165	
吉田川L-3	732	548	121	25	13	4	1,443	184	0	184	2,444	22	20	19	39	29	0	90	4,161	
吉田川L-4	878	306	663	193	3	1	2,044	20	0	20	3,463	244	18	31	49	59	0	352	5,879	
吉田川R-1	1,651	779	51	78	19	5	2,583	54	2	56	4,376	27	27	21	48	41	0	116	7,131	
吉田川R-2	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15	
吉田川R-3	2,467	1,123	124	89	19	5	3,827	92	1	93	6,483	46	42	35	77	101	0	224	10,627	
吉田川R-4	34	55	1	1	1	0	92	51	3	54	156	1	2	2	4	2	0	7	309	
吉田川R-5	1,017	187	54	27	6	2	1,293	88	0	88	2,190	19	9	11	20	14	0	53	3,624	
吉田川R-6	1,073	533	296	104	7	2	2,015	134	0	134	3,413	61	21	25	46	47	0	154	5,716	
吉田川R-7	261	25	1,078	56	0	0	1,420	72	1	73	2,405	39	3	6	9	10	0	58	3,956	
合計	131,453	78,406	35,916	19,056	642	206	265,679	5,607	94	5,701	450,060	8,849	2,930	3,547	6,477	4,550	0	19,876	741,316	

様式-3 被害額（事業実施後） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川 流量規模：1/10 （単位：百万円）

[illegible]

様式-3 被害額（事業実施後） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉 流量規模：1/20 （単位：百万円）

[illegible]

氾濫 ブロッ ク	一般資産被害額							農作物被害額			公共土木 施設等被害額	営業停 止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の 間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計					
			償却	在庫	償却	在庫														
A	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
B	1,373	756	282	131	16	5	2,563	368	3	371	4,342	131	34	54	88	59	0	278	7,554	
B	7,086	4,241	2,711	1,059	19	6	15,122	489	5	494	25,617	751	174	288	462	290	0	1,503	42,736	
B	11,184	7,714	2,913	857	24	8	22,700	324	3	327	38,454	557	284	319	603	434	0	1,594	63,075	
B	12,683	7,218	2,796	981	35	12	23,725	272	1	273	40,190	903	287	484	771	361	0	2,035	66,223	
B	7,438	3,665	8,023	5,227	34	12	24,399	227	2	229	41,332	1,534	132	166	298	368	0	2,200	68,160	
B	2,068	1,120	66	36	26	9	3,325	318	2	320	5,633	27	44	61	105	44	0	176	9,454	
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
B	7,149	2,162	381	356	42	13	10,103	383	7	390	17,114	107	80	82	162	111	0	380	27,987	
B	6,463	4,975	418	203	50	17	12,126	457	9	466	20,541	122	178	214	392	154	0	668	33,801	
B	1,770	1,187	203	100	26	9	3,295	186	2	188	5,582	52	43	52	95	38	0	185	9,250	
B	1,950	904	721	423	12	4	4,014	60	1	61	6,800	159	34	32	66	82	0	307	11,182	
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
B	1,021	519	67	35	7	3	1,652	166	2	168	2,798	24	19	23	42	34	0	100	4,718	
B	280	241	23	4	5	2	555	118	0	118	940	6	9	10	19	11	0	36	1,649	
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
B	1,080	554	45	62	13	4	1,758	53	2	55	2,978	20	20	18	38	33	0	91	4,882	
B	0	0	0	0	0	0	0	15	0	15	0	0	0	0	0	0	0	0	15	
B	1,556	792	82	59	14	4	2,507	85	0	85	4,247	27	29	23	52	59	0	138	6,977	
B	0	0	0	0	0	0	0	45	1	46	0	0	0	0	0	0	0	0	46	
B	580	95	5	5	5	1	691	83	0	83	1,171	2	3	3	6	3	0	11	1,956	
B	4	1	1	1	0	0	7	41	0	41	12	1	0	0	0	0	0	1	61	
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
合計	63,685	36,144	18,737	9,539	328	109	128,542	3,690	40	3,730	217,750	4,423	1,370	1,829	3,199	2,081	0	9,703	359,725	

氾濫 ブロッ ク	一般資産被害額							農作物被害額			公共土木 施設等被 害額	営業停 止損失	家屋における 応急対策費用			事業所にお ける応急 対策費用	その他の 間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計					
			償却	在庫	償却	在庫														
A	9,955	6,728	1,713	840	39	13	19,288	293	22	315	32,674	638	283	428	711	407	0	1,756	54,033	
B	356	145	0	0	2	1	504	30	0	30	854	0	5	4	9	0	0	9	1,397	
B	1,096	508	68	42	17	5	1,736	449	6	455	2,941	29	21	35	56	28	0	113	5,245	
B	1,502	895	310	148	18	6	2,879	474	6	480	4,877	136	39	59	98	66	0	300	8,536	
B	9,964	6,930	4,303	1,818	30	10	23,055	546	5	551	39,055	985	250	375	625	441	0	2,051	64,712	
B	13,555	9,234	3,143	991	32	10	26,965	354	4	358	45,679	619	334	356	690	496	0	1,805	74,807	
B	17,039	10,212	4,391	1,654	43	15	33,354	290	2	292	56,502	1,581	411	660	1,071	527	0	3,179	93,327	
B	11,764	5,217	9,917	7,347	48	16	34,309	230	2	232	58,119	2,072	190	200	390	525	0	2,987	95,647	
B	2,884	1,600	88	46	33	11	4,662	351	2	353	7,897	34	59	74	133	62	0	229	13,141	
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
B	8,108	2,691	442	446	51	16	11,754	556	10	566	19,911	134	99	102	201	133	0	468	32,699	
B	9,397	6,764	538	278	72	22	17,071	468	10	478	28,918	160	243	253	496	222	0	878	47,345	
B	2,375	1,573	290	155	30	10	4,433	215	2	217	7,510	69	59	65	124	62	0	255	12,415	
B	2,579	1,160	835	539	17	5	5,135	66	1	67	8,699	207	42	38	80	102	0	389	14,290	
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
B	1,191	599	77	43	8	3	1,921	224	2	226	3,254	26	21	26	47	40	0	113	5,514	
B	373	334	44	7	8	2	768	151	0	151	1,301	10	11	12	23	15	0	48	2,268	
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
B	1,421	651	47	68	16	5	2,208	53	2	55	3,740	24	23	19	42	38	0	104	6,107	
B	6	3	0	0	0	0	9	16	0	16	15	0	0	1	1	0	0	1	41	
B	2,292	1,030	118	86	18	5	3,549	90	1	91	6,012	43	40	32	72	99	0	214	9,866	
B	9	4	0	0	0	0	13	48	2	50	22	0	0	1	1	0	0	1	86	
B	717	122	10	12	5	2	868	85	0	85	1,470	5	5	5	10	6	0	21	2,444	
B	24	15	8	4	0	0	51	60	0	60	86	3	1	1	2	2	0	7	204	
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
合計	96,607	56,415	26,342	14,524	487	157	194,532	5,049	79	5,128	329,537	6,775	2,136	2,746	4,882	3,271	0	14,928	544,125	

様式－３			被害額（事業実施後）					水系名：鳴瀬川水系				河川名：鳴瀬川・吉				流量規模：1/80			（単位：百万円）			
氾濫 ブロッ ク	一般資産被害額							農作物被害額			公共土木 施設等被 害額	営業停 止損失	家屋における 応急対策費用			事業所にお ける応 急対策費 用	その他の 間接被害	小計	合計	備考		
	家屋	家庭用 品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労 働対価	代替活 動等	小計							
			償却	在庫	償却	在庫																
A	12,146	8,196	2,015	965	55	18	23,395	307	23	330	39,631	746	342	515	857	490	0	2,093	65,449			
B	356	145	0	0	2	1	504	30	0	30	854	0	5	4	9	0	0	9	1,397			
B	1,153	669	73	45	19	6	1,965	454	6	460	3,329	30	26	40	66	31	0	127	5,881			
B	1,799	1,000	335	159	20	7	3,320	525	7	532	5,624	150	46	72	118	76	0	344	9,820			
B	10,520	7,228	4,470	1,892	31	10	24,151	548	5	553	40,912	1,015	263	386	649	464	0	2,128	67,744			
B	14,395	9,602	3,204	1,025	33	11	28,270	360	4	364	47,889	633	345	362	707	513	0	1,853	78,376			
B	20,154	12,697	5,341	2,090	49	17	40,348	294	2	296	68,350	1,757	499	776	1,275	627	0	3,659	112,653			
B	12,105	5,330	9,979	7,500	51	16	34,981	230	2	232	59,258	2,218	193	202	395	529	0	3,142	97,613			
B	3,003	1,663	98	52	35	12	4,863	361	2	363	8,238	37	61	76	137	66	0	240	13,704			
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
B	8,881	3,064	465	471	62	20	12,963	611	12	623	21,959	144	109	116	225	148	0	517	36,062			
B	10,859	7,622	613	321	79	24	19,518	470	10	480	33,063	181	278	273	551	262	0	994	54,055			
B	2,452	1,601	291	155	31	10	4,540	219	2	221	7,691	69	60	65	125	63	0	257	12,709			
B	3,161	1,425	896	562	19	5	6,068	68	1	69	10,279	226	49	43	92	117	0	435	16,851			
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
B	1,333	645	86	49	8	3	2,124	240	2	242	3,598	29	24	27	51	46	0	126	6,090			
B	404	367	62	10	9	3	855	162	0	162	1,448	12	13	14	27	17	0	56	2,521			
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
B	1,826	834	51	79	21	6	2,817	55	2	57	4,772	28	29	21	50	45	0	123	7,769			
B	6	3	0	0	0	0	9	16	0	16	15	0	0	1	1	0	0	1	41			
B	2,339	1,058	123	89	19	5	3,633	93	1	94	6,154	45	40	33	73	101	0	219	10,100			
B	27	24	1	1	1	0	54	49	2	51	91	0	1	2	3	1	0	4	200			
B	838	145	12	16	6	2	1,019	86	0	86	1,726	6	6	5	11	9	0	26	2,857			
B	45	25	9	5	1	0	85	62	0	62	144	3	1	2	3	3	0	9	300			
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
合計	107,802	63,343	28,124	15,486	551	176	215,482	5,240	83	5,323	365,027	7,329	2,390	3,035	5,425	3,608	0	16,362	602,194			

様式－４

年平均被害軽減期待額

水系名：鳴瀬川水系

河川名：鳴瀬川・吉対象河道：平成27年

単位：百万円

流量規模	超過確率	被害額			区間平均 被害額 ④	区間確率 ⑤	年平均 被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待 額	備考
		事業を実施 しない場合 ①	事業を実施 した場合 ②	軽減額 ③=①－②					
1/3	0.33333	0	0	0	—	—	—	0	
1/5	0.20000	22	0	22	11	0.133	1	1	
1/10	0.10000	123,834	0	123,834	61,928	0.100	6,193	6,194	
1/20	0.05000	351,061	0	351,061	237,447	0.050	11,872	18,067	
1/30	0.03333	492,137	0	492,137	421,599	0.017	7,027	25,093	
1/50	0.02000	628,803	359,725	269,078	380,608	0.013	5,075	30,168	
1/80	0.01250	748,835	544,125	204,710	236,894	0.008	1,777	31,945	
1/100	0.01000	821,019	602,194	218,825	211,768	0.003	529	32,474	

様式－４

年平均被害軽減期待額

水系名：鳴瀬川水系

河川名：鳴瀬川・吉対象河道：平成27年

単位：百万円

流量規模	超過確率	被害額			区間平均 被害額 ④	区間確率 ⑤	年平均 被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待 額	備考
		事業を実施 しない場合 ①	事業を実施 した場合 ②	軽減額 ③=①－②					
1/3	0.33333	0	0	0	—	—	—	0	
1/5	0.20000	0	0	0	0	0.133	0	0	
1/10	0.10000	62,291	0	62,291	31,146	0.100	3,115	3,115	
1/20	0.05000	315,231	230,511	84,720	73,506	0.050	3,675	6,790	
1/30	0.03333	442,092	386,011	56,081	70,401	0.017	1,173	7,963	
1/50	0.02000	578,071	552,247	25,824	40,952	0.013	546	8,509	
1/80	0.01250	697,916	673,233	24,683	25,253	0.008	189	8,698	
1/100	0.01000	771,083	741,316	29,767	27,225	0.003	68	8,766	

様式－５ 費用対便益（全体事業）

水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川

単位：百万円

年次	年度	t	便 益 (B)				費 用 (C)						費用便益比 B / C	純現在価値 B - C
			便益		残存価値 ②	計 ① + ②	建設費③		維持管理費④		計③ + ④			
			便益	現在価値 ①			費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
整備期間 (H 19 ~ H 48 年)	H 19	-8	0	0			2,598	3,652			2,598	3,652		
	H 20	-7	483	636			3,394	4,454	0	0	3,394	4,454		
	H 21	-6	1,115	1,411			4,627	6,026	1	1	4,628	6,027		
	H 22	-5	1,975	2,403			3,781	4,730	3	4	3,784	4,734		
	H 23	-4	2,678	3,133			5,808	6,846	4	5	5,812	6,851		
	H 24	-3	3,759	4,228			10,230	11,741	6	7	10,236	11,748		
	H 25	-2	5,662	6,124			3,559	3,849	14	15	3,573	3,864		
	H 26	-1	6,324	6,577			3,482	3,621	18	19	3,500	3,640		
	H 27	0	6,971	6,971			2,348	2,348	19	19	2,367	2,367		
	H 28	1	7,408	7,123			2,592	2,492	31	30	2,623	2,522		
	H 29	2	9,419	8,708			2,042	1,888	37	34	2,079	1,922		
	H 30	3	11,004	9,783			2,059	1,830	42	37	2,101	1,867		
	H 31	4	12,602	10,772			2,120	1,812	44	38	2,164	1,850		
	H 32	5	14,247	11,710			2,483	2,041	44	36	2,527	2,077		
	H 33	6	16,174	12,783			2,478	1,958	45	36	2,523	1,994		
	H 34	7	17,250	13,109			2,470	1,877	46	35	2,516	1,912		
	H 35	8	18,323	13,388			2,699	1,972	48	35	2,747	2,007		
	H 36	9	19,495	13,697			2,595	1,823	48	34	2,643	1,857		
	H 37	10	20,622	13,931			2,592	1,751	48	32	2,640	1,783		
	H 38	11	21,747	14,126			2,608	1,694	49	32	2,657	1,726		
	H 39	12	22,880	14,291			2,240	1,399	50	31	2,290	1,430		
	H 40	13	23,852	14,325			2,289	1,375	52	31	2,341	1,406		
	H 41	14	24,846	14,348			2,283	1,318	53	31	2,336	1,349		
	H 42	15	25,838	14,347			2,306	1,280	56	31	2,362	1,311		
	H 43	16	26,839	14,330			2,470	1,319	58	31	2,528	1,350		
	H 44	17	27,912	14,329			2,521	1,294	60	31	2,581	1,325		
	H 45	18	29,007	14,319			2,284	1,127	64	32	2,348	1,159		
	H 46	19	29,998	14,238			2,150	1,020	67	32	2,217	1,052		
	H 47	20	30,932	14,117			1,751	799	72	33	1,823	832		
	H 48	21	31,692	13,908			1,800	790	83	36	1,883	826		
	H 49	22	32,474	13,703					92	39	92	39		
	H 50	23	32,474	13,176					92	37	92	37		
	H 51	24	32,474	12,669					92	36	92	36		
	H 52	25	32,474	12,182					92	35	92	35		
	H 53	26	32,474	11,713					92	33	92	33		
	H 54	27	32,474	11,263					92	32	92	32		
	H 55	28	32,474	10,829					92	31	92	31		
	H 56	29	32,474	10,413					92	29	92	29		
	H 57	30	32,474	10,012					92	28	92	28		
	H 58	31	32,474	9,627					92	27	92	27		
	H 59	32	32,474	9,257					92	26	92	26		
	H 60	33	32,474	8,901					92	25	92	25		
	H 61	34	32,474	8,559					92	24	92	24		
	H 62	35	32,474	8,229					92	23	92	23		
	H 63	36	32,474	7,913					92	22	92	22		
	H 64	37	32,474	7,609					92	22	92	22		
	H 65	38	32,474	7,316					92	21	92	21		
	H 66	39	32,474	7,035					92	20	92	20		
H 67	40	32,474	6,764					92	19	92	19			
H 68	41	32,474	6,504					92	18	92	18			
H 69	42	32,474	6,254					92	18	92	18			
H 70	43	32,474	6,013					92	17	92	17			
H 71	44	32,474	5,782					92	16	92	16			
H 72	45	32,474	5,559					92	16	92	16			
H 73	46	32,474	5,346					92	15	92	15			
H 74	47	32,474	5,140					92	15	92	15			
H 75	48	32,474	4,942					92	14	92	14			
H 76	49	32,474	4,752					92	13	92	13			
H 77	50	32,474	4,570					92	13	92	13			
H 78	51	32,474	4,394					92	12	92	12			
H 79	52	32,474	4,225					92	12	92	12			
H 80	53	32,474	4,062					92	12	92	12			
H 81	54	32,474	3,906					92	11	92	11			
H 82	55	32,474	3,756					92	11	92	11			
H 83	56	32,474	3,611					92	10	92	10			
H 84	57	32,474	3,472					92	10	92	10			
H 85	58	32,474	3,339					92	9	92	9			
H 86	59	32,474	3,210					92	9	92	9			
H 87	60	32,474	3,087					92	9	92	9			
H 88	61	32,474	2,968					92	8	92	8			
H 89	62	32,474	2,854					92	8	92	8			
H 90	63	32,474	2,744					92	8	92	8			
H 91	64	32,474	2,639					92	7	92	7			
H 92	65	32,474	2,537					92	7	92	7			
H 93	66	32,474	2,440					92	7	92	7			
H 94	67	32,474	2,346					92	7	92	7			
H 95	68	32,474	2,256					92	6	92	6			
H 96	69	32,474	2,169					92	6	92	6			
H 97	70	32,474	2,085					92	6	92	6			
H 98	71	32,474	2,005					92	6	92	6			
合 計			2,094,754	609,302	2,698	612,000	88,659	80,126	5,762	1,633	94,421	81,759	7.5	530,241

様式－５ 費用対便益（残事業）

水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川

単位：百万円

年次	年度	t					費用(C)						費用便益比 B／C	純現在価値 B－C
			便益		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
			便益	現在価値 ①			費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
整備期間 (H 19～ H 48年)	H 19	-8	0	0			0	0			0	0		
	H 20	-7	0	0			0	0	0	0	0	0		
	H 21	-6	0	0			0	0	0	0	0	0		
	H 22	-5	0	0			0	0	0	0	0	0		
	H 23	-4	0	0			0	0	0	0	0	0		
	H 24	-3	0	0			0	0	0	0	0	0		
	H 25	-2	0	0			0	0	0	0	0	0		
	H 26	-1	0	0			0	0	0	0	0	0		
	H 27	0	0	0			0	0	0	0	0	0		
	H 28	1	0	0			2,592	2,492	0	0	2,592	2,492		
	H 29	2	2,011	1,859			2,042	1,888	6	6	2,048	1,894		
	H 30	3	3,596	3,197			2,059	1,830	11	10	2,070	1,840		
	H 31	4	5,194	4,440			2,120	1,812	13	11	2,133	1,823		
	H 32	5	6,839	5,621			2,483	2,041	13	11	2,496	2,052		
	H 33	6	8,766	6,928			2,478	1,958	14	11	2,492	1,969		
	H 34	7	9,842	7,479			2,470	1,877	15	11	2,485	1,888		
	H 35	8	10,915	7,975			2,699	1,972	17	12	2,716	1,984		
	H 36	9	12,087	8,492			2,595	1,823	17	12	2,612	1,835		
	H 37	10	13,214	8,927			2,592	1,751	17	11	2,609	1,762		
	施設完成後の 評価期間 (50年)	H 38	11	14,339	9,314			2,608	1,694	18	12	2,626	1,706	
H 39		12	15,472	9,664			2,240	1,399	19	12	2,259	1,411		
H 40		13	16,444	9,876			2,289	1,375	21	13	2,310	1,388		
H 41		14	17,438	10,070			2,283	1,318	22	13	2,305	1,331		
H 42		15	18,430	10,234			2,306	1,280	25	14	2,331	1,294		
H 43		16	19,431	10,374			2,470	1,319	27	14	2,497	1,333		
H 44		17	20,504	10,526			2,521	1,294	29	15	2,550	1,309		
H 45		18	21,599	10,662			2,284	1,127	33	16	2,317	1,143		
H 46		19	22,590	10,722			2,150	1,020	36	17	2,186	1,037		
H 47		20	23,524	10,736			1,751	799	41	19	1,792	818		
H 48		21	24,284	10,657			1,800	790	52	23	1,852	813		
H 49		22	25,066	10,577					61	26	61	26		
H 50		23	25,066	10,170					61	25	61	25		
H 51		24	25,066	9,779					61	24	61	24		
H 52		25	25,066	9,403					61	23	61	23		
H 53		26	25,066	9,041					61	22	61	22		
H 54		27	25,066	8,693					61	21	61	21		
H 55		28	25,066	8,359					61	20	61	20		
H 56		29	25,066	8,037					61	20	61	20		
H 57		30	25,066	7,728					61	19	61	19		
H 58		31	25,066	7,431					61	18	61	18		
H 59		32	25,066	7,145					61	17	61	17		
H 60		33	25,066	6,870					61	17	61	17		
H 61		34	25,066	6,606					61	16	61	16		
H 62		35	25,066	6,352					61	15	61	15		
H 63		36	25,066	6,108					61	15	61	15		
H 64		37	25,066	5,873					61	14	61	14		
H 65		38	25,066	5,647					61	14	61	14		
H 66		39	25,066	5,430					61	13	61	13		
H 67		40	25,066	5,221					61	13	61	13		
H 68		41	25,066	5,020					61	12	61	12		
H 69		42	25,066	4,827					61	12	61	12		
H 70		43	25,066	4,641					61	11	61	11		
H 71		44	25,066	4,463					61	11	61	11		
H 72		45	25,066	4,291					61	10	61	10		
H 73		46	25,066	4,126					61	10	61	10		
H 74		47	25,066	3,968					61	10	61	10		
H 75		48	25,066	3,815					61	9	61	9		
H 76		49	25,066	3,668					61	9	61	9		
H 77		50	25,066	3,527					61	9	61	9		
H 78		51	25,066	3,391					61	8	61	8		
H 79		52	25,066	3,261					61	8	61	8		
H 80		53	25,066	3,136					61	8	61	8		
H 81		54	25,066	3,015					61	7	61	7		
H 82		55	25,066	2,899					61	7	61	7		
H 83		56	25,066	2,788					61	7	61	7		
H 84		57	25,066	2,680					61	7	61	7		
H 85		58	25,066	2,577					61	6	61	6		
H 86		59	25,066	2,478					61	6	61	6		
H 87		60	25,066	2,383					61	6	61	6		
H 88		61	25,066	2,291					61	6	61	6		
H 89		62	25,066	2,203					61	5	61	5		
H 90		63	25,066	2,118					61	5	61	5		
H 91		64	25,066	2,037					61	5	61	5		
H 92		65	25,066	1,958					61	5	61	5		
H 93		66	25,066	1,883					61	5	61	5		
H 94		67	25,066	1,811					61	4	61	4		
H 95		68	25,066	1,741					61	4	61	4		
H 96		69	25,066	1,674					61	4	61	4		
H 97		70	25,066	1,610					61	4	61	4		
H 98	71	25,066	1,548					61	4	61	4			
合 計			1,539,819	404,051	1,040	405,091	48,832	32,859	3,496	839	52,328	33,698	12.0	371,393

様式－５ 費用対便益（当面事業） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川 単位：百万円

年次	年度	t	便 益 (B)				費 用 (C)						費用便益比 B／C	純現在価値 B－C
			便益		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
			便益	現在価値 ①			費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
施設完成後の 評価期間（５０年）	H 28	1	0	0			2,592	2,492	0	0	2,592	2,492		
	H 29	2	2,011	1,859			2,042	1,888	6	6	2,048	1,894		
	H 30	3	3,596	3,197			2,059	1,830	11	10	2,070	1,840		
	H 31	4	5,194	4,440			2,120	1,812	13	11	2,133	1,823		
	H 32	5	6,839	5,621			2,483	2,041	13	11	2,496	2,052		
	H 33	6	8,766	6,928					14	11	14	11		
	H 34	7	8,766	6,661					14	11	14	11		
	H 35	8	8,766	6,405					14	10	14	10		
	H 36	9	8,766	6,159					14	10	14	10		
	H 37	10	8,766	5,922					14	9	14	9		
	H 38	11	8,766	5,694					14	9	14	9		
	H 39	12	8,766	5,475					14	9	14	9		
	H 40	13	8,766	5,265					14	8	14	8		
	H 41	14	8,766	5,062					14	8	14	8		
	H 42	15	8,766	4,867					14	8	14	8		
	H 43	16	8,766	4,680					14	7	14	7		
	H 44	17	8,766	4,500					14	7	14	7		
	H 45	18	8,766	4,327					14	7	14	7		
	H 46	19	8,766	4,161					14	7	14	7		
	H 47	20	8,766	4,001					14	6	14	6		
	H 48	21	8,766	3,847					14	6	14	6		
	H 49	22	8,766	3,699					14	6	14	6		
	H 50	23	8,766	3,557					14	6	14	6		
	H 51	24	8,766	3,420					14	5	14	5		
	H 52	25	8,766	3,288					14	5	14	5		
	H 53	26	8,766	3,162					14	5	14	5		
	H 54	27	8,766	3,040					14	5	14	5		
	H 55	28	8,766	2,923					14	5	14	5		
	H 56	29	8,766	2,811					14	4	14	4		
	H 57	30	8,766	2,703					14	4	14	4		
	H 58	31	8,766	2,599					14	4	14	4		
	H 59	32	8,766	2,499					14	4	14	4		
	H 60	33	8,766	2,403					14	4	14	4		
	H 61	34	8,766	2,310					14	4	14	4		
	H 62	35	8,766	2,221					14	4	14	4		
	H 63	36	8,766	2,136					14	3	14	3		
	H 64	37	8,766	2,054					14	3	14	3		
	H 65	38	8,766	1,975					14	3	14	3		
	H 66	39	8,766	1,899					14	3	14	3		
	H 67	40	8,766	1,826					14	3	14	3		
	H 68	41	8,766	1,756					14	3	14	3		
	H 69	42	8,766	1,688					14	3	14	3		
	H 70	43	8,766	1,623					14	3	14	3		
	H 71	44	8,766	1,561					14	2	14	2		
	H 72	45	8,766	1,501					14	2	14	2		
	H 73	46	8,766	1,443					14	2	14	2		
	H 74	47	8,766	1,388					14	2	14	2		
	H 75	48	8,766	1,334					14	2	14	2		
	H 76	49	8,766	1,283					14	2	14	2		
	H 77	50	8,766	1,233					14	2	14	2		
	H 78	51	8,766	1,186					14	2	14	2		
	H 79	52	8,766	1,140					14	2	14	2		
	H 80	53	8,766	1,097					14	2	14	2		
	H 81	54	8,766	1,054					14	2	14	2		
	H 82	55	8,766	1,014					14	2	14	2		
合 計			455,940	169,897	416	170,313	11,296	10,063	743	284	12,039	10,347	16.5	159,966

様式-5 費用対便益（全体事業：事業費+10%） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川 単位：百万円

年次	年度	t	便 益 (B)				費 用 (C)						費用便益比 B / C	純現在価値 B - C
			便益		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
			便益	現在価値 ①			費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
整備期間 (H 19 ~ H 48 年)	H 19	-8	0	0			2,598	3,652			2,598	3,652		
	H 20	-7	483	636			3,394	4,454	0	0	3,394	4,454		
	H 21	-6	1,115	1,411			4,627	6,026	1	1	4,628	6,027		
	H 22	-5	1,975	2,403			3,781	4,730	3	4	3,784	4,734		
	H 23	-4	2,678	3,133			5,808	6,846	4	5	5,812	6,851		
	H 24	-3	3,759	4,228			10,230	11,741	6	7	10,236	11,748		
	H 25	-2	5,662	6,124			3,559	3,849	14	15	3,573	3,864		
	H 26	-1	6,324	6,577			3,482	3,621	18	19	3,500	3,640		
	H 27	0	6,971	6,971			2,348	2,348	19	19	2,367	2,367		
	H 28	1	7,408	7,123			2,851	2,741	31	30	2,882	2,771		
	H 29	2	9,419	8,708			2,246	2,077	37	34	2,283	2,111		
	H 30	3	11,004	9,783			2,265	2,014	42	37	2,307	2,051		
	H 31	4	12,602	10,772			2,332	1,993	44	38	2,376	2,031		
	H 32	5	14,247	11,710			2,731	2,245	44	36	2,775	2,281		
	H 33	6	16,174	12,783			2,726	2,154	45	36	2,771	2,190		
	H 34	7	17,250	13,109			2,717	2,065	46	35	2,763	2,100		
	H 35	8	18,323	13,388			2,969	2,169	48	35	3,017	2,204		
	H 36	9	19,495	13,697			2,855	2,006	48	34	2,903	2,040		
	H 37	10	20,622	13,931			2,851	1,926	48	32	2,899	1,958		
	H 38	11	21,747	14,126			2,869	1,864	49	32	2,918	1,896		
	H 39	12	22,880	14,291			2,464	1,539	50	31	2,514	1,570		
	H 40	13	23,853	14,325			2,518	1,512	52	31	2,570	1,543		
	H 41	14	24,847	14,349			2,511	1,450	53	31	2,564	1,481		
	H 42	15	25,838	14,347			2,537	1,409	56	31	2,593	1,440		
	H 43	16	26,839	14,330			2,717	1,451	58	31	2,775	1,482		
	H 44	17	27,912	14,329			2,773	1,424	60	31	2,833	1,455		
	H 45	18	29,007	14,319			2,512	1,240	64	32	2,576	1,272		
	H 46	19	29,998	14,238			2,365	1,123	67	32	2,432	1,155		
	H 47	20	30,932	14,117			1,926	879	72	33	1,998	912		
	H 48	21	31,692	13,908			1,980	869	83	36	2,063	905		
	H 49	22	32,474	13,703					92	39	92	39		
	H 50	23	32,474	13,176					92	37	92	37		
	H 51	24	32,474	12,669					92	36	92	36		
	H 52	25	32,474	12,182					92	35	92	35		
	H 53	26	32,474	11,713					92	33	92	33		
	H 54	27	32,474	11,263					92	32	92	32		
	H 55	28	32,474	10,829					92	31	92	31		
	H 56	29	32,474	10,413					92	29	92	29		
	H 57	30	32,474	10,012					92	28	92	28		
	H 58	31	32,474	9,627					92	27	92	27		
	H 59	32	32,474	9,257					92	26	92	26		
	H 60	33	32,474	8,901					92	25	92	25		
	H 61	34	32,474	8,559					92	24	92	24		
	H 62	35	32,474	8,229					92	23	92	23		
	H 63	36	32,474	7,913					92	22	92	22		
	H 64	37	32,474	7,609					92	22	92	22		
	H 65	38	32,474	7,316					92	21	92	21		
	H 66	39	32,474	7,035					92	20	92	20		
H 67	40	32,474	6,764					92	19	92	19			
H 68	41	32,474	6,504					92	18	92	18			
H 69	42	32,474	6,254					92	18	92	18			
H 70	43	32,474	6,013					92	17	92	17			
H 71	44	32,474	5,782					92	16	92	16			
H 72	45	32,474	5,559					92	16	92	16			
H 73	46	32,474	5,346					92	15	92	15			
H 74	47	32,474	5,140					92	15	92	15			
H 75	48	32,474	4,942					92	14	92	14			
H 76	49	32,474	4,752					92	13	92	13			
H 77	50	32,474	4,570					92	13	92	13			
H 78	51	32,474	4,394					92	12	92	12			
H 79	52	32,474	4,225					92	12	92	12			
H 80	53	32,474	4,062					92	12	92	12			
H 81	54	32,474	3,906					92	11	92	11			
H 82	55	32,474	3,756					92	11	92	11			
H 83	56	32,474	3,611					92	10	92	10			
H 84	57	32,474	3,472					92	10	92	10			
H 85	58	32,474	3,339					92	9	92	9			
H 86	59	32,474	3,210					92	9	92	9			
H 87	60	32,474	3,087					92	9	92	9			
H 88	61	32,474	2,968					92	8	92	8			
H 89	62	32,474	2,854					92	8	92	8			
H 90	63	32,474	2,744					92	8	92	8			
H 91	64	32,474	2,639					92	7	92	7			
H 92	65	32,474	2,537					92	7	92	7			
H 93	66	32,474	2,440					92	7	92	7			
H 94	67	32,474	2,346					92	7	92	7			
H 95	68	32,474	2,256					92	6	92	6			
H 96	69	32,474	2,169					92	6	92	6			
H 97	70	32,474	2,085					92	6	92	6			
H 98	71	32,474	2,005					92	6	92	6			
合 計			2,094,756	609,303	2,968	612,271	93,542	83,417	5,762	1,633	99,304	85,050	7.2	527,221
施設完成後の評価期間 (50年)														

様式-5 費用対便益（全体事業：事業費-10%） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川 単位：百万円

年次	年度	t	便 益 (B)				費 用 (C)						費用便益比 B / C	純現在価値 B - C
			便益		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
			便益	現在価値 ①			費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
整備期間 (H 19 ~ H 48 年)	H 19	-8	0	0			2,598	3,652			2,598	3,652		
	H 20	-7	483	636			3,394	4,454	0	0	3,394	4,454		
	H 21	-6	1,115	1,411			4,627	6,026	1	1	4,628	6,027		
	H 22	-5	1,975	2,403			3,781	4,730	3	4	3,784	4,734		
	H 23	-4	2,678	3,133			5,808	6,846	4	5	5,812	6,851		
	H 24	-3	3,759	4,228			10,230	11,741	6	7	10,236	11,748		
	H 25	-2	5,662	6,124			3,559	3,849	14	15	3,573	3,864		
	H 26	-1	6,324	6,577			3,482	3,621	18	19	3,500	3,640		
	H 27	0	6,971	6,971			2,348	2,348	19	19	2,367	2,367		
	H 28	1	7,408	7,123			2,333	2,243	31	30	2,364	2,273		
	H 29	2	9,420	8,709			1,838	1,699	37	34	1,875	1,733		
	H 30	3	11,004	9,783			1,853	1,647	42	37	1,895	1,684		
	H 31	4	12,602	10,772			1,908	1,631	44	38	1,952	1,669		
	H 32	5	14,247	11,710			2,235	1,837	44	36	2,279	1,873		
	H 33	6	16,174	12,783			2,230	1,762	45	36	2,275	1,798		
	H 34	7	17,250	13,109			2,223	1,689	46	35	2,269	1,724		
	H 35	8	18,323	13,388			2,429	1,775	48	35	2,477	1,810		
	H 36	9	19,495	13,697			2,336	1,641	48	34	2,384	1,675		
	H 37	10	20,622	13,931			2,333	1,576	48	32	2,381	1,608		
	H 38	11	21,747	14,126			2,347	1,525	49	32	2,396	1,557		
	H 39	12	22,880	14,291			2,016	1,259	50	31	2,066	1,290		
	H 40	13	23,852	14,325			2,060	1,237	52	31	2,112	1,268		
	H 41	14	24,846	14,348			2,055	1,187	53	31	2,108	1,218		
	H 42	15	25,838	14,347			2,075	1,152	56	31	2,131	1,183		
	H 43	16	26,839	14,330			2,223	1,187	58	31	2,281	1,218		
	H 44	17	27,912	14,329			2,269	1,165	60	31	2,329	1,196		
	H 45	18	29,006	14,318			2,056	1,015	64	32	2,120	1,047		
	H 46	19	29,998	14,238			1,935	918	67	32	2,002	950		
	H 47	20	30,932	14,117			1,576	719	72	33	1,648	752		
	H 48	21	31,692	13,908			1,620	711	83	36	1,703	747		
	H 49	22	32,474	13,703					92	39	92	39		
	H 50	23	32,474	13,176					92	37	92	37		
	H 51	24	32,474	12,669					92	36	92	36		
	H 52	25	32,474	12,182					92	35	92	35		
	H 53	26	32,474	11,713					92	33	92	33		
	H 54	27	32,474	11,263					92	32	92	32		
	H 55	28	32,474	10,829					92	31	92	31		
	H 56	29	32,474	10,413					92	29	92	29		
	H 57	30	32,474	10,012					92	28	92	28		
	H 58	31	32,474	9,627					92	27	92	27		
	H 59	32	32,474	9,257					92	26	92	26		
	H 60	33	32,474	8,901					92	25	92	25		
	H 61	34	32,474	8,559					92	24	92	24		
	H 62	35	32,474	8,229					92	23	92	23		
	H 63	36	32,474	7,913					92	22	92	22		
	H 64	37	32,474	7,609					92	22	92	22		
	H 65	38	32,474	7,316					92	21	92	21		
	H 66	39	32,474	7,035					92	20	92	20		
H 67	40	32,474	6,764					92	19	92	19			
H 68	41	32,474	6,504					92	18	92	18			
H 69	42	32,474	6,254					92	18	92	18			
H 70	43	32,474	6,013					92	17	92	17			
H 71	44	32,474	5,782					92	16	92	16			
H 72	45	32,474	5,559					92	16	92	16			
H 73	46	32,474	5,346					92	15	92	15			
H 74	47	32,474	5,140					92	15	92	15			
H 75	48	32,474	4,942					92	14	92	14			
H 76	49	32,474	4,752					92	13	92	13			
H 77	50	32,474	4,570					92	13	92	13			
H 78	51	32,474	4,394					92	12	92	12			
H 79	52	32,474	4,225					92	12	92	12			
H 80	53	32,474	4,062					92	12	92	12			
H 81	54	32,474	3,906					92	11	92	11			
H 82	55	32,474	3,756					92	11	92	11			
H 83	56	32,474	3,611					92	10	92	10			
H 84	57	32,474	3,472					92	10	92	10			
H 85	58	32,474	3,339					92	9	92	9			
H 86	59	32,474	3,210					92	9	92	9			
H 87	60	32,474	3,087					92	9	92	9			
H 88	61	32,474	2,968					92	8	92	8			
H 89	62	32,474	2,854					92	8	92	8			
H 90	63	32,474	2,744					92	8	92	8			
H 91	64	32,474	2,639					92	7	92	7			
H 92	65	32,474	2,537					92	7	92	7			
H 93	66	32,474	2,440					92	7	92	7			
H 94	67	32,474	2,346					92	7	92	7			
H 95	68	32,474	2,256					92	6	92	6			
H 96	69	32,474	2,169					92	6	92	6			
H 97	70	32,474	2,085					92	6	92	6			
H 98	71	32,474	2,005					92	6	92	6			
合 計			2,094,754	609,302	2,428	611,730	83,777	76,842	5,762	1,633	89,539	78,475	7.8	533,255

様式－５			費用対便益（全体事業：工期+10%）				水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川						単位：百万円	
年次	年度	t	便 益（B）				費 用（C）						費用便益比 B／C	純現在価値 B－C
			便益	現在価値 ①	残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
基準	H 27	0					費用	現在価値	費用	現在価値	費用	現在価値		
整備期間（H 1 9 ～ H 5 0 年）	H 19	-8	0	0			2, 598	3, 652			2, 598	3, 652		
	H 20	-7	483	636			3, 394	4, 454	0	0	3, 394	4, 454		
	H 21	-6	1, 115	1, 411			4, 627	6, 026	1	1	4, 628	6, 027		
	H 22	-5	1, 975	2, 403			3, 781	4, 730	3	4	3, 784	4, 734		
	H 23	-4	2, 678	3, 133			5, 808	6, 846	4	5	5, 812	6, 851		
	H 24	-3	3, 759	4, 228			10, 230	11, 741	6	7	10, 236	11, 748		
	H 25	-2	5, 662	6, 124			3, 559	3, 849	14	15	3, 573	3, 864		
	H 26	-1	6, 324	6, 577			3, 482	3, 621	18	19	3, 500	3, 640		
	H 27	0	6, 971	6, 971			2, 348	2, 348	19	19	2, 367	2, 367		
	H 28	1	7, 408	7, 123			2, 367	2, 276	28	27	2, 395	2, 303		
	H 29	2	9, 439	8, 727			1, 912	1, 768	33	31	1, 945	1, 799		
	H 30	3	11, 079	9, 849			1, 877	1, 669	37	33	1, 914	1, 702		
	H 31	4	12, 690	10, 847			1, 920	1, 641	40	34	1, 960	1, 675		
	H 32	5	14, 337	11, 784			2, 141	1, 760	40	33	2, 181	1, 793		
	H 33	6	16, 174	12, 783			2, 265	1, 790	41	32	2, 306	1, 822		
	H 34	7	17, 130	13, 017			2, 259	1, 717	41	31	2, 300	1, 748		
	H 35	8	18, 084	13, 214			2, 325	1, 699	43	31	2, 368	1, 730		
	H 36	9	19, 065	13, 395			2, 442	1, 716	44	31	2, 486	1, 747		
	H 37	10	20, 096	13, 576			2, 369	1, 600	44	30	2, 413	1, 630		
	H 38	11	21, 096	13, 704			2, 367	1, 538	44	29	2, 411	1, 567		
	H 39	12	22, 095	13, 800			2, 381	1, 487	45	28	2, 426	1, 515		
	H 40	13	23, 100	13, 873			2, 061	1, 238	46	28	2, 107	1, 266		
	H 41	14	23, 970	13, 842			2, 084	1, 203	47	27	2, 131	1, 230		
	H 42	15	24, 850	13, 798			2, 086	1, 158	48	27	2, 134	1, 185		
	H 43	16	25, 730	13, 737			2, 099	1, 121	50	27	2, 149	1, 148		
	H 44	17	26, 616	13, 664			2, 191	1, 125	52	27	2, 243	1, 152		
	H 45	18	27, 541	13, 595			2, 277	1, 124	54	27	2, 331	1, 151		
	H 46	19	28, 502	13, 528			2, 219	1, 053	56	27	2, 275	1, 080		
	H 47	20	29, 439	13, 436			2, 050	936	59	27	2, 109	963		
	H 48	21	30, 304	13, 298			1, 894	831	62	27	1, 956	858		
	H 49	22	31, 104	13, 125			1, 603	676	67	28	1, 670	704		
	H 50	23	31, 780	12, 894			1, 643	667	76	31	1, 719	698		
施設完成後の評価期間（５０年）	H 51	24	32, 474	12, 669					92	36	92	36		
	H 52	25	32, 474	12, 182					92	35	92	35		
	H 53	26	32, 474	11, 713					92	33	92	33		
	H 54	27	32, 474	11, 263					92	32	92	32		
	H 55	28	32, 474	10, 829					92	31	92	31		
	H 56	29	32, 474	10, 413					92	29	92	29		
	H 57	30	32, 474	10, 012					92	28	92	28		
	H 58	31	32, 474	9, 627					92	27	92	27		
	H 59	32	32, 474	9, 257					92	26	92	26		
	H 60	33	32, 474	8, 901					92	25	92	25		
	H 61	34	32, 474	8, 559					92	24	92	24		
	H 62	35	32, 474	8, 229					92	23	92	23		
	H 63	36	32, 474	7, 913					92	22	92	22		
	H 64	37	32, 474	7, 609					92	22	92	22		
	H 65	38	32, 474	7, 316					92	21	92	21		
	H 66	39	32, 474	7, 035					92	20	92	20		
	H 67	40	32, 474	6, 764					92	19	92	19		
	H 68	41	32, 474	6, 504					92	18	92	18		
	H 69	42	32, 474	6, 254					92	18	92	18		
	H 70	43	32, 474	6, 013					92	17	92	17		
	H 71	44	32, 474	5, 782					92	16	92	16		
	H 72	45	32, 474	5, 559					92	16	92	16		
	H 73	46	32, 474	5, 346					92	15	92	15		
	H 74	47	32, 474	5, 140					92	15	92	15		
	H 75	48	32, 474	4, 942					92	14	92	14		
	H 76	49	32, 474	4, 752					92	13	92	13		
	H 77	50	32, 474	4, 570					92	13	92	13		
	H 78	51	32, 474	4, 394					92	12	92	12		
	H 79	52	32, 474	4, 225					92	12	92	12		
	H 80	53	32, 474	4, 062					92	12	92	12		
	H 81	54	32, 474	3, 906					92	11	92	11		
	H 82	55	32, 474	3, 756					92	11	92	11		
	H 83	56	32, 474	3, 611					92	10	92	10		
	H 84	57	32, 474	3, 472					92	10	92	10		
	H 85	58	32, 474	3, 339					92	9	92	9		
	H 86	59	32, 474	3, 210					92	9	92	9		
	H 87	60	32, 474	3, 087					92	9	92	9		
	H 88	61	32, 474	2, 968					92	8	92	8		
	H 89	62	32, 474	2, 854					92	8	92	8		
	H 90	63	32, 474	2, 744					92	8	92	8		
	H 91	64	32, 474	2, 639					92	7	92	7		
	H 92	65	32, 474	2, 537					92	7	92	7		
	H 93	66	32, 474	2, 440					92	7	92	7		
	H 94	67	32, 474	2, 346					92	7	92	7		
	H 95	68	32, 474	2, 256					92	6	92	6		
	H 96	69	32, 474	2, 169					92	6	92	6		
	H 97	70	32, 474	2, 085					92	6	92	6		
	H 98	71	32, 474	2, 005					92	6	92	6		
H 99	72	32, 474	1, 928					92	5	92	5			
H 100	73	32, 474	1, 854					92	5	92	5			
合 計			2, 144, 296	605, 132	2, 495	607, 627	88, 659	79, 060	5, 762	1, 542	94, 421	80, 602	7. 5	527, 025

様式－5

費用対便益（全体事業：工期-10%）

水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川

単位：百万円

年次	年度	t	便 益 (B)				費 用 (C)						費用便益比 B / C	純現在価値 B - C
			便益		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
			便益	現在価値 ①			費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
整備期間（H 19 ～ H 46 年）	H 19	-8	0	0			2,598	3,652			2,598	3,652		
	H 20	-7	483	636			3,394	4,454	0	0	3,394	4,454		
	H 21	-6	1,115	1,411			4,627	6,026	1	1	4,628	6,027		
	H 22	-5	1,975	2,403			3,781	4,730	3	4	3,784	4,734		
	H 23	-4	2,678	3,133			5,808	6,846	4	5	5,812	6,851		
	H 24	-3	3,759	4,228			10,230	11,741	6	7	10,236	11,748		
	H 25	-2	5,662	6,124			3,559	3,849	14	15	3,573	3,864		
	H 26	-1	6,324	6,577			3,482	3,621	18	19	3,500	3,640		
	H 27	0	6,971	6,971			2,348	2,348	19	19	2,367	2,367		
	H 28	1	7,408	7,123			2,807	2,699	35	34	2,842	2,733		
	H 29	2	9,361	8,655			2,260	2,089	42	39	2,302	2,128		
	H 30	3	10,933	9,719			2,295	2,040	47	42	2,342	2,082		
	H 31	4	12,530	10,711			2,496	2,134	49	42	2,545	2,176		
	H 32	5	14,266	11,726			2,742	2,254	49	40	2,791	2,294		
	H 33	6	16,174	12,783			2,734	2,161	50	40	2,784	2,201		
	H 34	7	17,404	13,226			2,899	2,203	52	40	2,951	2,243		
	H 35	8	18,708	13,670			2,896	2,116	53	39	2,949	2,155		
	H 36	9	20,011	14,059			2,865	2,013	53	37	2,918	2,050		
	H 37	10	21,300	14,390			2,862	1,933	54	36	2,916	1,969		
	H 38	11	22,587	14,672			2,484	1,614	56	36	2,540	1,650		
	H 39	12	23,705	14,806			2,528	1,579	58	36	2,586	1,615		
	H 40	13	24,842	14,919			2,532	1,521	60	36	2,592	1,557		
	H 41	14	25,981	15,003			2,626	1,516	63	36	2,689	1,552		
	H 42	15	27,163	15,083			2,760	1,533	65	36	2,825	1,569		
	H 43	16	28,404	15,165			2,624	1,401	69	37	2,693	1,438		
	H 44	17	29,585	15,188			2,419	1,242	73	37	2,492	1,279		
	H 45	18	30,673	15,141			2,019	997	78	39	2,097	1,036		
	H 46	19	31,581	14,990			1,984	942	91	43	2,075	985		
	H 47	20	32,474	14,821					92	42	92	42		
	H 48	21	32,474	14,251					92	40	92	40		
	H 49	22	32,474	13,703					92	39	92	39		
	H 50	23	32,474	13,176					92	37	92	37		
	H 51	24	32,474	12,669					92	36	92	36		
	H 52	25	32,474	12,182					92	35	92	35		
	H 53	26	32,474	11,713					92	33	92	33		
	H 54	27	32,474	11,263					92	32	92	32		
	H 55	28	32,474	10,829					92	31	92	31		
	H 56	29	32,474	10,413					92	29	92	29		
	H 57	30	32,474	10,012					92	28	92	28		
	H 58	31	32,474	9,627					92	27	92	27		
	H 59	32	32,474	9,257					92	26	92	26		
	H 60	33	32,474	8,901					92	25	92	25		
	H 61	34	32,474	8,559					92	24	92	24		
	H 62	35	32,474	8,229					92	23	92	23		
	H 63	36	32,474	7,913					92	22	92	22		
	H 64	37	32,474	7,609					92	22	92	22		
H 65	38	32,474	7,316					92	21	92	21			
H 66	39	32,474	7,035					92	20	92	20			
H 67	40	32,474	6,764					92	19	92	19			
H 68	41	32,474	6,504					92	18	92	18			
H 69	42	32,474	6,254					92	18	92	18			
H 70	43	32,474	6,013					92	17	92	17			
H 71	44	32,474	5,782					92	16	92	16			
H 72	45	32,474	5,559					92	16	92	16			
H 73	46	32,474	5,346					92	15	92	15			
H 74	47	32,474	5,140					92	15	92	15			
H 75	48	32,474	4,942					92	14	92	14			
H 76	49	32,474	4,752					92	13	92	13			
H 77	50	32,474	4,570					92	13	92	13			
H 78	51	32,474	4,394					92	12	92	12			
H 79	52	32,474	4,225					92	12	92	12			
H 80	53	32,474	4,062					92	12	92	12			
H 81	54	32,474	3,906					92	11	92	11			
H 82	55	32,474	3,756					92	11	92	11			
H 83	56	32,474	3,611					92	10	92	10			
H 84	57	32,474	3,472					92	10	92	10			
H 85	58	32,474	3,339					92	9	92	9			
H 86	59	32,474	3,210					92	9	92	9			
H 87	60	32,474	3,087					92	9	92	9			
H 88	61	32,474	2,968					92	8	92	8			
H 89	62	32,474	2,854					92	8	92	8			
H 90	63	32,474	2,744					92	8	92	8			
H 91	64	32,474	2,639					92	7	92	7			
H 92	65	32,474	2,537					92	7	92	7			
H 93	66	32,474	2,440					92	7	92	7			
H 94	67	32,474	2,346					92	7	92	7			
H 95	68	32,474	2,256					92	6	92	6			
H 96	69	32,474	2,169					92	6	92	6			
合 計			2,045,283	613,631	2,918	616,549	88,659	81,254	5,762	1,730	94,421	82,984	7.4	533,565

施設完成後の評価期間（50年）

様式－５			費用対便益（残事業：事業費+10%）				水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川				単位：百万円			
年次	年度	t	便 益（B）			計 ①＋②	建設費③		費 用（C） 維持管理費④		計③＋④		費用便益比 B／C	純現在価値 B－C
			便益	現在価値 ①	残存価値 ②		費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
整備期間（H 19～H 48年）	H 19	-8	0	0			0	0			0	0		
	H 20	-7	0	0			0	0	0	0	0	0		
	H 21	-6	0	0			0	0	0	0	0	0		
	H 22	-5	0	0			0	0	0	0	0	0		
	H 23	-4	0	0			0	0	0	0	0	0		
	H 24	-3	0	0			0	0	0	0	0	0		
	H 25	-2	0	0			0	0	0	0	0	0		
	H 26	-1	0	0			0	0	0	0	0	0		
	H 27	0	0	0			0	0	0	0	0	0		
	H 28	1	0	0			2,851	2,741	0	0	2,851	2,741		
	H 29	2	2,011	1,859			2,246	2,077	6	6	2,252	2,083		
	H 30	3	3,596	3,197			2,265	2,014	11	10	2,276	2,024		
	H 31	4	5,194	4,440			2,332	1,993	13	11	2,345	2,004		
	H 32	5	6,839	5,621			2,731	2,245	13	11	2,744	2,256		
	H 33	6	8,766	6,928			2,726	2,154	14	11	2,740	2,165		
	H 34	7	9,842	7,479			2,717	2,065	15	11	2,732	2,076		
	H 35	8	10,915	7,975			2,969	2,169	17	12	2,986	2,181		
	H 36	9	12,087	8,492			2,855	2,006	17	12	2,872	2,018		
	H 37	10	13,214	8,927			2,851	1,926	17	11	2,868	1,937		
	H 38	11	14,339	9,314			2,869	1,864	18	12	2,887	1,876		
	H 39	12	15,472	9,664			2,464	1,539	19	12	2,483	1,551		
	H 40	13	16,444	9,876			2,518	1,512	21	13	2,539	1,525		
	H 41	14	17,438	10,070			2,511	1,450	22	13	2,533	1,463		
	H 42	15	18,430	10,234			2,537	1,409	25	14	2,562	1,423		
	H 43	16	19,431	10,374			2,717	1,451	27	14	2,744	1,465		
	H 44	17	20,504	10,526			2,773	1,424	29	15	2,802	1,439		
	H 45	18	21,599	10,662			2,512	1,240	33	16	2,545	1,256		
	H 46	19	22,590	10,722			2,365	1,123	36	17	2,401	1,140		
	H 47	20	23,524	10,736			1,926	879	41	19	1,967	898		
	H 48	21	24,284	10,657			1,980	869	52	23	2,032	892		
施設完成後の評価期間（50年）	H 49	22	25,066	10,577					61	26	61	26		
	H 50	23	25,066	10,170					61	25	61	25		
	H 51	24	25,066	9,779					61	24	61	24		
	H 52	25	25,066	9,403					61	23	61	23		
	H 53	26	25,066	9,041					61	22	61	22		
	H 54	27	25,066	8,693					61	21	61	21		
	H 55	28	25,066	8,359					61	20	61	20		
	H 56	29	25,066	8,037					61	20	61	20		
	H 57	30	25,066	7,728					61	19	61	19		
	H 58	31	25,066	7,431					61	18	61	18		
	H 59	32	25,066	7,145					61	17	61	17		
	H 60	33	25,066	6,870					61	17	61	17		
	H 61	34	25,066	6,606					61	16	61	16		
	H 62	35	25,066	6,352					61	15	61	15		
	H 63	36	25,066	6,108					61	15	61	15		
	H 64	37	25,066	5,873					61	14	61	14		
	H 65	38	25,066	5,647					61	14	61	14		
	H 66	39	25,066	5,430					61	13	61	13		
	H 67	40	25,066	5,221					61	13	61	13		
	H 68	41	25,066	5,020					61	12	61	12		
	H 69	42	25,066	4,827					61	12	61	12		
	H 70	43	25,066	4,641					61	11	61	11		
	H 71	44	25,066	4,463					61	11	61	11		
	H 72	45	25,066	4,291					61	10	61	10		
	H 73	46	25,066	4,126					61	10	61	10		
	H 74	47	25,066	3,968					61	10	61	10		
	H 75	48	25,066	3,815					61	9	61	9		
	H 76	49	25,066	3,668					61	9	61	9		
	H 77	50	25,066	3,527					61	9	61	9		
	H 78	51	25,066	3,391					61	8	61	8		
	H 79	52	25,066	3,261					61	8	61	8		
	H 80	53	25,066	3,136					61	8	61	8		
	H 81	54	25,066	3,015					61	7	61	7		
	H 82	55	25,066	2,899					61	7	61	7		
	H 83	56	25,066	2,788					61	7	61	7		
	H 84	57	25,066	2,680					61	7	61	7		
	H 85	58	25,066	2,577					61	6	61	6		
	H 86	59	25,066	2,478					61	6	61	6		
	H 87	60	25,066	2,383					61	6	61	6		
	H 88	61	25,066	2,291					61	6	61	6		
	H 89	62	25,066	2,203					61	5	61	5		
	H 90	63	25,066	2,118					61	5	61	5		
	H 91	64	25,066	2,037					61	5	61	5		
	H 92	65	25,066	1,958					61	5	61	5		
	H 93	66	25,066	1,883					61	5	61	5		
	H 94	67	25,066	1,811					61	4	61	4		
	H 95	68	25,066	1,741					61	4	61	4		
	H 96	69	25,066	1,674					61	4	61	4		
	H 97	70	25,066	1,610					61	4	61	4		
	H 98	71	25,066	1,548					61	4	61	4		
合 計			1,539,819	404,051	1,144	405,195	53,715	36,150	3,496	839	57,211	36,989	11.0	368,206

様式－５			費用対便益（残事業：事業費-10%）				水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川				単位：百万円			
年次	年度	t	便 益（B）			費 用（C）						費用便益比 B／C	純現在価値 B－C	
			便益	現在価値 ①	残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
							費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
整備期間（H 19 ～ H 48 年）	H 19	-8	0	0			0	0			0	0		
	H 20	-7	0	0			0	0	0	0	0	0		
	H 21	-6	0	0			0	0	0	0	0	0		
	H 22	-5	0	0			0	0	0	0	0	0		
	H 23	-4	0	0			0	0	0	0	0	0		
	H 24	-3	0	0			0	0	0	0	0	0		
	H 25	-2	0	0			0	0	0	0	0	0		
	H 26	-1	0	0			0	0	0	0	0	0		
	H 27	0	0	0			0	0	0	0	0	0		
	H 28	1	0	0			2,333	2,243	0	0	2,333	2,243		
	H 29	2	2,011	1,859			1,838	1,699	6	6	1,844	1,705		
	H 30	3	3,596	3,197			1,853	1,647	11	10	1,864	1,657		
	H 31	4	5,194	4,440			1,908	1,631	13	11	1,921	1,642		
	H 32	5	6,839	5,621			2,235	1,837	13	11	2,248	1,848		
	H 33	6	8,766	6,928			2,230	1,762	14	11	2,244	1,773		
	H 34	7	9,842	7,479			2,223	1,689	15	11	2,238	1,700		
	H 35	8	10,915	7,975			2,429	1,775	17	12	2,446	1,787		
	H 36	9	12,087	8,492			2,336	1,641	17	12	2,353	1,653		
	H 37	10	13,214	8,927			2,333	1,576	17	11	2,350	1,587		
	H 38	11	14,339	9,314			2,347	1,525	18	12	2,365	1,537		
	H 39	12	15,472	9,664			2,016	1,259	19	12	2,035	1,271		
	H 40	13	16,444	9,876			2,060	1,237	21	13	2,081	1,250		
	H 41	14	17,438	10,070			2,055	1,187	22	13	2,077	1,200		
	H 42	15	18,430	10,234			2,075	1,152	25	14	2,100	1,166		
	H 43	16	19,431	10,374			2,223	1,187	27	14	2,250	1,201		
	H 44	17	20,504	10,526			2,269	1,165	29	15	2,298	1,180		
	H 45	18	21,599	10,662			2,056	1,015	33	16	2,089	1,031		
	H 46	19	22,590	10,722			1,935	918	36	17	1,971	935		
	H 47	20	23,524	10,736			1,576	719	41	19	1,617	738		
	H 48	21	24,284	10,657			1,620	711	52	23	1,672	734		
	H 49	22	25,066	10,577					61	26	61	26		
	H 50	23	25,066	10,170					61	25	61	25		
	H 51	24	25,066	9,779					61	24	61	24		
	H 52	25	25,066	9,403					61	23	61	23		
	H 53	26	25,066	9,041					61	22	61	22		
	H 54	27	25,066	8,693					61	21	61	21		
	H 55	28	25,066	8,359					61	20	61	20		
	H 56	29	25,066	8,037					61	20	61	20		
	H 57	30	25,066	7,728					61	19	61	19		
H 58	31	25,066	7,431					61	18	61	18			
H 59	32	25,066	7,145					61	17	61	17			
H 60	33	25,066	6,870					61	17	61	17			
H 61	34	25,066	6,606					61	16	61	16			
H 62	35	25,066	6,352					61	15	61	15			
H 63	36	25,066	6,108					61	15	61	15			
H 64	37	25,066	5,873					61	14	61	14			
H 65	38	25,066	5,647					61	14	61	14			
H 66	39	25,066	5,430					61	13	61	13			
H 67	40	25,066	5,221					61	13	61	13			
H 68	41	25,066	5,020					61	12	61	12			
H 69	42	25,066	4,827					61	12	61	12			
H 70	43	25,066	4,641					61	11	61	11			
H 71	44	25,066	4,463					61	11	61	11			
H 72	45	25,066	4,291					61	10	61	10			
H 73	46	25,066	4,126					61	10	61	10			
H 74	47	25,066	3,968					61	10	61	10			
H 75	48	25,066	3,815					61	9	61	9			
H 76	49	25,066	3,668					61	9	61	9			
H 77	50	25,066	3,527					61	9	61	9			
H 78	51	25,066	3,391					61	8	61	8			
H 79	52	25,066	3,261					61	8	61	8			
H 80	53	25,066	3,136					61	8	61	8			
H 81	54	25,066	3,015					61	7	61	7			
H 82	55	25,066	2,899					61	7	61	7			
H 83	56	25,066	2,788					61	7	61	7			
H 84	57	25,066	2,680					61	7	61	7			
H 85	58	25,066	2,577					61	6	61	6			
H 86	59	25,066	2,478					61	6	61	6			
H 87	60	25,066	2,383					61	6	61	6			
H 88	61	25,066	2,291					61	6	61	6			
H 89	62	25,066	2,203					61	5	61	5			
H 90	63	25,066	2,118					61	5	61	5			
H 91	64	25,066	2,037					61	5	61	5			
H 92	65	25,066	1,958					61	5	61	5			
H 93	66	25,066	1,883					61	5	61	5			
H 94	67	25,066	1,811					61	4	61	4			
H 95	68	25,066	1,741					61	4	61	4			
H 96	69	25,066	1,674					61	4	61	4			
H 97	70	25,066	1,610					61	4	61	4			
H 98	71	25,066	1,548					61	4	61	4			
合 計			1,539,819	404,051	936	404,987	43,950	29,575	3,496	839	47,446	30,414	13.3	374,573

様式－５ 費用対便益（残事業：工期+10%） 水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川 単位：百万円

年次	年度	t	便 益 (B)				費 用 (C)						費用便益比 B / C	純現在価値 B - C
			便益		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
			便益	現在価値 ①			費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
整備期間 (H 19 ~ H 50 年)	H 19	-8	0	0			0	0			0	0		
	H 20	-7	0	0			0	0	0	0	0	0		
	H 21	-6	0	0			0	0	0	0	0	0		
	H 22	-5	0	0			0	0	0	0	0	0		
	H 23	-4	0	0			0	0	0	0	0	0		
	H 24	-3	0	0			0	0	0	0	0	0		
	H 25	-2	0	0			0	0	0	0	0	0		
	H 26	-1	0	0			0	0	0	0	0	0		
	H 27	0	0	0			0	0	0	0	0	0		
	H 28	1	0	0			2,367	2,276	0	0	2,367	2,276		
	H 29	2	2,031	1,878			1,912	1,768	5	5	1,917	1,773		
	H 30	3	3,671	3,264			1,877	1,669	9	8	1,886	1,677		
	H 31	4	5,282	4,515			1,920	1,641	11	9	1,931	1,650		
	H 32	5	6,929	5,695			2,141	1,760	12	10	2,153	1,770		
	H 33	6	8,766	6,928			2,265	1,790	12	9	2,277	1,799		
	H 34	7	9,722	7,388			2,259	1,717	13	10	2,272	1,727		
	H 35	8	10,676	7,801			2,325	1,699	14	10	2,339	1,709		
	H 36	9	11,657	8,190			2,442	1,716	16	11	2,458	1,727		
	H 37	10	12,688	8,572			2,369	1,600	16	11	2,385	1,611		
	H 38	11	13,688	8,891			2,367	1,538	16	10	2,383	1,548		
	H 39	12	14,687	9,173			2,381	1,487	16	10	2,397	1,497		
	H 40	13	15,692	9,424			2,061	1,238	17	10	2,078	1,248		
	H 41	14	16,562	9,564			2,084	1,203	19	11	2,103	1,214		
	H 42	15	17,442	9,685			2,086	1,158	20	11	2,106	1,169		
	H 43	16	18,322	9,782			2,099	1,121	22	12	2,121	1,133		
	H 44	17	19,208	9,861			2,191	1,125	24	12	2,215	1,137		
	H 45	18	20,133	9,938			2,277	1,124	26	13	2,303	1,137		
	H 46	19	21,094	10,012			2,219	1,053	28	13	2,247	1,066		
	H 47	20	22,031	10,055			2,050	936	31	14	2,081	950		
	H 48	21	22,896	10,048			1,894	831	34	15	1,928	846		
	H 49	22	23,696	9,999			1,603	676	38	16	1,641	692		
	H 50	23	24,372	9,888			1,643	667	47	19	1,690	686		
H 51	24	25,066	9,779					61	24	61	24			
H 52	25	25,066	9,403					61	23	61	23			
H 53	26	25,066	9,041					61	22	61	22			
H 54	27	25,066	8,693					61	21	61	21			
H 55	28	25,066	8,359					61	20	61	20			
H 56	29	25,066	8,037					61	20	61	20			
H 57	30	25,066	7,728					61	19	61	19			
H 58	31	25,066	7,431					61	18	61	18			
H 59	32	25,066	7,145					61	17	61	17			
H 60	33	25,066	6,870					61	17	61	17			
H 61	34	25,066	6,606					61	16	61	16			
H 62	35	25,066	6,352					61	15	61	15			
H 63	36	25,066	6,108					61	15	61	15			
H 64	37	25,066	5,873					61	14	61	14			
H 65	38	25,066	5,647					61	14	61	14			
H 66	39	25,066	5,430					61	13	61	13			
H 67	40	25,066	5,221					61	13	61	13			
H 68	41	25,066	5,020					61	12	61	12			
H 69	42	25,066	4,827					61	12	61	12			
H 70	43	25,066	4,641					61	11	61	11			
H 71	44	25,066	4,463					61	11	61	11			
H 72	45	25,066	4,291					61	10	61	10			
H 73	46	25,066	4,126					61	10	61	10			
H 74	47	25,066	3,968					61	10	61	10			
H 75	48	25,066	3,815					61	9	61	9			
H 76	49	25,066	3,668					61	9	61	9			
H 77	50	25,066	3,527					61	9	61	9			
H 78	51	25,066	3,391					61	8	61	8			
H 79	52	25,066	3,261					61	8	61	8			
H 80	53	25,066	3,136					61	8	61	8			
H 81	54	25,066	3,015					61	7	61	7			
H 82	55	25,066	2,899					61	7	61	7			
H 83	56	25,066	2,788					61	7	61	7			
H 84	57	25,066	2,680					61	7	61	7			
H 85	58	25,066	2,577					61	6	61	6			
H 86	59	25,066	2,478					61	6	61	6			
H 87	60	25,066	2,383					61	6	61	6			
H 88	61	25,066	2,291					61	6	61	6			
H 89	62	25,066	2,203					61	5	61	5			
H 90	63	25,066	2,118					61	5	61	5			
H 91	64	25,066	2,037					61	5	61	5			
H 92	65	25,066	1,958					61	5	61	5			
H 93	66	25,066	1,883					61	5	61	5			
H 94	67	25,066	1,811					61	4	61	4			
H 95	68	25,066	1,741					61	4	61	4			
H 96	69	25,066	1,674					61	4	61	4			
H 97	70	25,066	1,610					61	4	61	4			
H 98	71	25,066	1,548					61	4	61	4			
H 99	72	25,066	1,488					61	4	61	4			
H 100	73	25,066	1,431					61	3	61	3			
合 計			1,574,545	399,021	961	399,982	48,832	31,793	3,496	781	52,328	32,574	12.3	367,408

施設完成後の評価期間（50年）

様式－５

費用対便益（残事業：工期-10%）

水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川

単位：百万円

年次	年度	t	便 益（B）				費 用（C）						費用便益比 B／C	純現在価値 B－C
			便益		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
			便益	現在価値 ①			費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
整備期間（H 9 ～ H 4 6 年）	H 19	-8	0	0			0	0			0	0		
	H 20	-7	0	0			0	0	0	0	0	0		
	H 21	-6	0	0			0	0	0	0	0	0		
	H 22	-5	0	0			0	0	0	0	0	0		
	H 23	-4	0	0			0	0	0	0	0	0		
	H 24	-3	0	0			0	0	0	0	0	0		
	H 25	-2	0	0			0	0	0	0	0	0		
	H 26	-1	0	0			0	0	0	0	0	0		
	H 27	0	0	0			0	0	0	0	0	0		
	H 28	1	0	0			2,807	2,699	1	1	2,808	2,700		
	H 29	2	1,953	1,806			2,260	2,089	8	7	2,268	2,096		
	H 30	3	3,525	3,134			2,295	2,040	13	12	2,308	2,052		
	H 31	4	5,122	4,378			2,496	2,134	14	12	2,510	2,146		
	H 32	5	6,858	5,637			2,742	2,254	15	12	2,757	2,266		
	H 33	6	8,766	6,928			2,734	2,161	16	13	2,750	2,174		
	H 34	7	9,996	7,596			2,899	2,203	18	14	2,917	2,217		
	H 35	8	11,300	8,257			2,896	2,116	19	14	2,915	2,130		
	H 36	9	12,603	8,855			2,865	2,013	19	13	2,884	2,026		
	H 37	10	13,892	9,385			2,862	1,933	20	14	2,882	1,947		
	H 38	11	15,179	9,860			2,484	1,614	21	14	2,505	1,628		
	H 39	12	16,297	10,179			2,528	1,579	23	14	2,551	1,593		
	H 40	13	17,434	10,470			2,532	1,521	25	15	2,557	1,536		
	H 41	14	18,573	10,725			2,626	1,516	29	17	2,655	1,533		
	H 42	15	19,755	10,969			2,760	1,533	31	17	2,791	1,550		
	H 43	16	20,996	11,210			2,624	1,401	35	19	2,659	1,420		
	H 44	17	22,177	11,385			2,419	1,242	39	20	2,458	1,262		
	H 45	18	23,265	11,484			2,019	997	44	22	2,063	1,019		
	H 46	19	24,173	11,474			1,984	942	56	27	2,040	969		
施設完成後の評価期間（50年）	H 47	20	25,066	11,440					61	28	61	28		
	H 48	21	25,066	11,000					61	27	61	27		
	H 49	22	25,066	10,577					61	26	61	26		
	H 50	23	25,066	10,170					61	25	61	25		
	H 51	24	25,066	9,779					61	24	61	24		
	H 52	25	25,066	9,403					61	23	61	23		
	H 53	26	25,066	9,041					61	22	61	22		
	H 54	27	25,066	8,693					61	21	61	21		
	H 55	28	25,066	8,359					61	20	61	20		
	H 56	29	25,066	8,037					61	20	61	20		
	H 57	30	25,066	7,728					61	19	61	19		
	H 58	31	25,066	7,431					61	18	61	18		
	H 59	32	25,066	7,145					61	17	61	17		
	H 60	33	25,066	6,870					61	17	61	17		
	H 61	34	25,066	6,606					61	16	61	16		
	H 62	35	25,066	6,352					61	15	61	15		
	H 63	36	25,066	6,108					61	15	61	15		
	H 64	37	25,066	5,873					61	14	61	14		
	H 65	38	25,066	5,647					61	14	61	14		
	H 66	39	25,066	5,430					61	13	61	13		
	H 67	40	25,066	5,221					61	13	61	13		
	H 68	41	25,066	5,020					61	12	61	12		
	H 69	42	25,066	4,827					61	12	61	12		
	H 70	43	25,066	4,641					61	11	61	11		
	H 71	44	25,066	4,463					61	11	61	11		
	H 72	45	25,066	4,291					61	10	61	10		
	H 73	46	25,066	4,126					61	10	61	10		
	H 74	47	25,066	3,968					61	10	61	10		
	H 75	48	25,066	3,815					61	9	61	9		
	H 76	49	25,066	3,668					61	9	61	9		
	H 77	50	25,066	3,527					61	9	61	9		
	H 78	51	25,066	3,391					61	8	61	8		
H 79	52	25,066	3,261					61	8	61	8			
H 80	53	25,066	3,136					61	8	61	8			
H 81	54	25,066	3,015					61	7	61	7			
H 82	55	25,066	2,899					61	7	61	7			
H 83	56	25,066	2,788					61	7	61	7			
H 84	57	25,066	2,680					61	7	61	7			
H 85	58	25,066	2,577					61	6	61	6			
H 86	59	25,066	2,478					61	6	61	6			
H 87	60	25,066	2,383					61	6	61	6			
H 88	61	25,066	2,291					61	6	61	6			
H 89	62	25,066	2,203					61	5	61	5			
H 90	63	25,066	2,118					61	5	61	5			
H 91	64	25,066	2,037					61	5	61	5			
H 92	65	25,066	1,958					61	5	61	5			
H 93	66	25,066	1,883					61	5	61	5			
H 94	67	25,066	1,811					61	4	61	4			
H 95	68	25,066	1,741					61	4	61	4			
H 96	69	25,066	1,674					61	4	61	4			
合 計			1,505,164	409,312	1,125	410,437	48,832	33,987	3,496	900	52,328	34,887	11.8	375,550

施設完成後の評価期間（５０年）

様式－５ 費用対便益（残事業：資産+10%）

水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川

単位：百万円

年次	年度	t	便 益 (B)				費 用 (C)						費用便益比 B / C	純現在価値 B - C
			便益		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
			便益	現在価値 ①			費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
整備期間 (H 19 ～ H 48 年)	H 19	-8	0	0			0	0			0	0		
	H 20	-7	0	0			0	0	0	0	0	0		
	H 21	-6	0	0			0	0	0	0	0	0		
	H 22	-5	0	0			0	0	0	0	0	0		
	H 23	-4	0	0			0	0	0	0	0	0		
	H 24	-3	0	0			0	0	0	0	0	0		
	H 25	-2	0	0			0	0	0	0	0	0		
	H 26	-1	0	0			0	0	0	0	0	0		
	H 27	0	0	0			0	0	0	0	0	0		
	H 28	1	0	0			2,592	2,492	0	0	2,592	2,492		
	H 29	2	2,207	2,040			2,042	1,888	6	6	2,048	1,894		
	H 30	3	3,945	3,507			2,059	1,830	11	10	2,070	1,840		
	H 31	4	5,698	4,871			2,120	1,812	13	11	2,133	1,823		
	H 32	5	7,503	6,167			2,483	2,041	13	11	2,496	2,052		
	H 33	6	9,617	7,600			2,478	1,958	14	11	2,492	1,969		
	H 34	7	10,797	8,205			2,470	1,877	15	11	2,485	1,888		
	H 35	8	11,974	8,749			2,699	1,972	17	12	2,716	1,984		
	H 36	9	13,260	9,316			2,595	1,823	17	12	2,612	1,835		
	H 37	10	14,496	9,793			2,592	1,751	17	11	2,609	1,762		
	H 38	11	15,731	10,219			2,608	1,694	18	12	2,626	1,706		
	H 39	12	16,973	10,601			2,240	1,399	19	12	2,259	1,411		
	H 40	13	18,040	10,834			2,289	1,375	21	13	2,310	1,388		
	H 41	14	19,131	11,048			2,283	1,318	22	13	2,305	1,331		
	H 42	15	20,218	11,226			2,306	1,280	25	14	2,331	1,294		
	H 43	16	21,317	11,381			2,470	1,319	27	14	2,497	1,333		
	H 44	17	22,493	11,547			2,521	1,294	29	15	2,550	1,309		
	H 45	18	23,694	11,696			2,284	1,127	33	16	2,317	1,143		
	H 46	19	24,782	11,763			2,150	1,020	36	17	2,186	1,037		
	H 47	20	25,806	11,778			1,751	799	41	19	1,792	818		
	H 48	21	26,641	11,691			1,800	790	52	23	1,852	813		
H 49	22	27,498	11,603					61	26	61	26			
H 50	23	27,498	11,157					61	25	61	25			
H 51	24	27,498	10,728					61	24	61	24			
H 52	25	27,498	10,315					61	23	61	23			
H 53	26	27,498	9,918					61	22	61	22			
H 54	27	27,498	9,537					61	21	61	21			
H 55	28	27,498	9,170					61	20	61	20			
H 56	29	27,498	8,817					61	20	61	20			
H 57	30	27,498	8,478					61	19	61	19			
H 58	31	27,498	8,152					61	18	61	18			
H 59	32	27,498	7,839					61	17	61	17			
H 60	33	27,498	7,537					61	17	61	17			
H 61	34	27,498	7,247					61	16	61	16			
H 62	35	27,498	6,968					61	15	61	15			
H 63	36	27,498	6,700					61	15	61	15			
H 64	37	27,498	6,443					61	14	61	14			
H 65	38	27,498	6,195					61	14	61	14			
H 66	39	27,498	5,957					61	13	61	13			
H 67	40	27,498	5,728					61	13	61	13			
H 68	41	27,498	5,507					61	12	61	12			
H 69	42	27,498	5,295					61	12	61	12			
H 70	43	27,498	5,092					61	11	61	11			
H 71	44	27,498	4,896					61	11	61	11			
H 72	45	27,498	4,708					61	10	61	10			
H 73	46	27,498	4,527					61	10	61	10			
H 74	47	27,498	4,352					61	10	61	10			
H 75	48	27,498	4,185					61	9	61	9			
H 76	49	27,498	4,024					61	9	61	9			
H 77	50	27,498	3,869					61	9	61	9			
H 78	51	27,498	3,720					61	8	61	8			
H 79	52	27,498	3,577					61	8	61	8			
H 80	53	27,498	3,440					61	8	61	8			
H 81	54	27,498	3,308					61	7	61	7			
H 82	55	27,498	3,180					61	7	61	7			
H 83	56	27,498	3,058					61	7	61	7			
H 84	57	27,498	2,940					61	7	61	7			
H 85	58	27,498	2,827					61	6	61	6			
H 86	59	27,498	2,719					61	6	61	6			
H 87	60	27,498	2,614					61	6	61	6			
H 88	61	27,498	2,513					61	6	61	6			
H 89	62	27,498	2,417					61	5	61	5			
H 90	63	27,498	2,324					61	5	61	5			
H 91	64	27,498	2,234					61	5	61	5			
H 92	65	27,498	2,148					61	5	61	5			
H 93	66	27,498	2,066					61	5	61	5			
H 94	67	27,498	1,986					61	4	61	4			
H 95	68	27,498	1,910					61	4	61	4			
H 96	69	27,498	1,837					61	4	61	4			
H 97	70	27,498	1,766					61	4	61	4			
H 98	71	27,498	1,698					61	4	61	4			
合 計			1,689,223	443,258	1,040	444,298	48,832	32,859	3,496	839	52,328	33,698	13.2	410,600

様式－５ 費用対便益（残事業：資産-10%）

水系名：鳴瀬川水系 河川名：鳴瀬川・吉田川

単位：百万円

年次	年度	t	便 益 (B)				費 用 (C)						費用便益比 B / C	純現在価値 B - C
			便益		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
			便益	現在価値 ①			費用	現在価値	費用	現在価値	費用	現在価値		
基準	H 27	0												
整備期間 (H 19 ~ H 48 年)	H 19	-8	0	0			0	0			0	0		
	H 20	-7	0	0			0	0	0	0	0	0		
	H 21	-6	0	0			0	0	0	0	0	0		
	H 22	-5	0	0			0	0	0	0	0	0		
	H 23	-4	0	0			0	0	0	0	0	0		
	H 24	-3	0	0			0	0	0	0	0	0		
	H 25	-2	0	0			0	0	0	0	0	0		
	H 26	-1	0	0			0	0	0	0	0	0		
	H 27	0	0	0			0	0	0	0	0	0		
	H 28	1	0	0			2,592	2,492	0	0	2,592	2,492		
	H 29	2	1,816	1,679			2,042	1,888	6	6	2,048	1,894		
	H 30	3	3,247	2,887			2,059	1,830	11	10	2,070	1,840		
	H 31	4	4,690	4,009			2,120	1,812	13	11	2,133	1,823		
	H 32	5	6,175	5,075			2,483	2,041	13	11	2,496	2,052		
	H 33	6	7,915	6,255			2,478	1,958	14	11	2,492	1,969		
	H 34	7	8,887	6,753			2,470	1,877	15	11	2,485	1,888		
	H 35	8	9,855	7,201			2,699	1,972	17	12	2,716	1,984		
	H 36	9	10,913	7,667			2,595	1,823	17	12	2,612	1,835		
	H 37	10	11,931	8,060			2,592	1,751	17	11	2,609	1,762		
	H 38	11	12,947	8,410			2,608	1,694	18	12	2,626	1,706		
	H 39	12	13,970	8,726			2,240	1,399	19	12	2,259	1,411		
	H 40	13	14,848	8,917			2,289	1,375	21	13	2,310	1,388		
	H 41	14	15,746	9,093			2,283	1,318	22	13	2,305	1,331		
	H 42	15	16,641	9,240			2,306	1,280	25	14	2,331	1,294		
	H 43	16	17,545	9,367			2,470	1,319	27	14	2,497	1,333		
	H 44	17	18,514	9,505			2,521	1,294	29	15	2,550	1,309		
	H 45	18	19,502	9,627			2,284	1,127	33	16	2,317	1,143		
	H 46	19	20,398	9,682			2,150	1,020	36	17	2,186	1,037		
	H 47	20	21,241	9,694			1,751	799	41	19	1,792	818		
	H 48	21	21,927	9,622			1,800	790	52	23	1,852	813		
H 49	22	22,633	9,550					61	26	61	26			
H 50	23	22,633	9,183					61	25	61	25			
H 51	24	22,633	8,830					61	24	61	24			
H 52	25	22,633	8,490					61	23	61	23			
H 53	26	22,633	8,163					61	22	61	22			
H 54	27	22,633	7,849					61	21	61	21			
H 55	28	22,633	7,548					61	20	61	20			
H 56	29	22,633	7,257					61	20	61	20			
H 57	30	22,633	6,978					61	19	61	19			
H 58	31	22,633	6,710					61	18	61	18			
H 59	32	22,633	6,452					61	17	61	17			
H 60	33	22,633	6,204					61	17	61	17			
H 61	34	22,633	5,965					61	16	61	16			
H 62	35	22,633	5,736					61	15	61	15			
H 63	36	22,633	5,515					61	15	61	15			
H 64	37	22,633	5,303					61	14	61	14			
H 65	38	22,633	5,099					61	14	61	14			
H 66	39	22,633	4,903					61	13	61	13			
H 67	40	22,633	4,714					61	13	61	13			
H 68	41	22,633	4,533					61	12	61	12			
H 69	42	22,633	4,359					61	12	61	12			
H 70	43	22,633	4,191					61	11	61	11			
H 71	44	22,633	4,030					61	11	61	11			
H 72	45	22,633	3,875					61	10	61	10			
H 73	46	22,633	3,726					61	10	61	10			
H 74	47	22,633	3,582					61	10	61	10			
H 75	48	22,633	3,445					61	9	61	9			
H 76	49	22,633	3,312					61	9	61	9			
H 77	50	22,633	3,185					61	9	61	9			
H 78	51	22,633	3,062					61	8	61	8			
H 79	52	22,633	2,944					61	8	61	8			
H 80	53	22,633	2,831					61	8	61	8			
H 81	54	22,633	2,722					61	7	61	7			
H 82	55	22,633	2,618					61	7	61	7			
H 83	56	22,633	2,517					61	7	61	7			
H 84	57	22,633	2,420					61	7	61	7			
H 85	58	22,633	2,327					61	6	61	6			
H 86	59	22,633	2,238					61	6	61	6			
H 87	60	22,633	2,152					61	6	61	6			
H 88	61	22,633	2,069					61	6	61	6			
H 89	62	22,633	1,989					61	5	61	5			
H 90	63	22,633	1,913					61	5	61	5			
H 91	64	22,633	1,839					61	5	61	5			
H 92	65	22,633	1,768					61	5	61	5			
H 93	66	22,633	1,700					61	5	61	5			
H 94	67	22,633	1,635					61	4	61	4			
H 95	68	22,633	1,572					61	4	61	4			
H 96	69	22,633	1,512					61	4	61	4			
H 97	70	22,633	1,453					61	4	61	4			
H 98	71	22,633	1,398					61	4	61	4			
合 計			1,390,358	364,835	1,040	365,875	48,832	32,859	3,496	839	52,328	33,698	10.9	332,177

事業費の内訳書

河川事業

事業名	鳴瀬川直轄河川改修事業（全体事業費）
-----	--------------------

※（ ）欄に残事業費、全体事業費の別を記入すること。

評価年度	H27	再評価
------	-----	-----

※ 評価の種類(新規事業採択時評価、再評価、完了後の事後評価)の別を記入すること。

区分	費目	工種	単位	数量	金額 (百万円)	備考	
工事費			式	1	52,728		
	本工事費			式	1	40,339	
		築堤	m3	2,802,000	18,206		
		特殊堤	m	740	252		
		河道掘削	m3	3,330,000	3,843		
		排水・揚水機場改築	基	7	3,550		
		堰改築	基	1	752		
		水路	m	10,300	110		
		残土処理	m3	757,000	5,599		
		質的整備	m	14,600	1,606		
		耐震対策	m	2,500	2,500		
		二線堤	式	1	3,921		
	附帯工事費			式	1	12,389	
		道路橋	箇所	6	2,944		
		鉄道橋	箇所	1	4,396		
		樋門・樋管	箇所	30	5,049		
用地費及補償費			式	1	7,328		
用地費		式	1	2,444			
補償費		式	1	4,884			
間接経費			式	1	15,157		
工事諸費			式	1	13,446		
事業費 計			式	1	88,659		
維持管理費			式	1	5,762		

事業費の内訳書

河川事業

事業名	鳴瀬川直轄河川改修事業（残事業費）
-----	-------------------

※（ ）欄に残事業費、全体事業費の別を記入すること。

評価年度	H27	再評価
------	-----	-----

※ 評価の種類(新規事業採択時評価、再評価、完了後の事後評価)の別を記入すること。

区分	費目	工種	単位	数量	金額 (百万円)	備考	
工事費			式	1	26,868		
	本工事費			式	1	17,163	
		築堤	m3	263,000	1,711		
		特殊堤	m	740	252		
		河道掘削	m3	2,066,000	2,384		
		排水・揚水機場改築	基	7	3,136		
		堰改築	基	1	752		
		水路	m	5,000	53		
		残土処理	m3	644,000	4,769		
		質的整備	m	14,600	1,606		
		耐震対策	m	2,500	2,500		
		二線堤	式	－	0		
	附帯工事費			式	1	9,705	
		道路橋	箇所	6	2,944		
		鉄道橋	箇所	1	4,396		
樋門・樋管		箇所	14	2,365			
用地費及補償費			式	1	3,221		
	用地費	式	1	1,012			
	補償費	式	1	2,209			
間接経費			式	1	9,714		
工事諸費			式	1	9,029		
事業費 計			式	1	48,832		

維持管理費	式	1	3,496	
-------	---	---	-------	--

事業費の内訳書

河川事業

事業名	鳴瀬川直轄河川改修事業（当面事業費）
-----	--------------------

※（ ）欄に残事業費、全体事業費の別を記入すること。

評価年度	H27	再評価
------	-----	-----

※ 評価の種類(新規事業採択時評価、再評価、完了後の事後評価)の別を記入すること。

区分	費目	工種	単位	数量	金額 (百万円)	備考
工事費			式	1	6,124	
	本工事費		式	1	4,243	
		築堤	m3	70,000	452	
		特殊堤	m	－	0	
		河道掘削	m3	769,000	888	
		排水・揚水機場改築	基	1	1,265	
		堰改築	基	－	0	
		水路	m	800	9	
		残土処理	m3	109,000	809	
		質的整備	m	2,900	320	
		耐震対策	m	500	500	
		二線堤	式	－	0	
	附帯工事費		式	1	1,881	
		道路橋	箇所	－	0	
		鉄道橋	箇所	－	628	
		樋門・樋管	箇所	7	1,253	
用地費及補償費			式	1	504	
	用地費		式	1	436	
	補償費		式	1	68	
間接経費			式	1	2,543	
工事諸費			式	1	2,125	
事業費 計			式	1	11,296	
維持管理費			式	1	743	