


様式－1 氾濫ブロック分割図

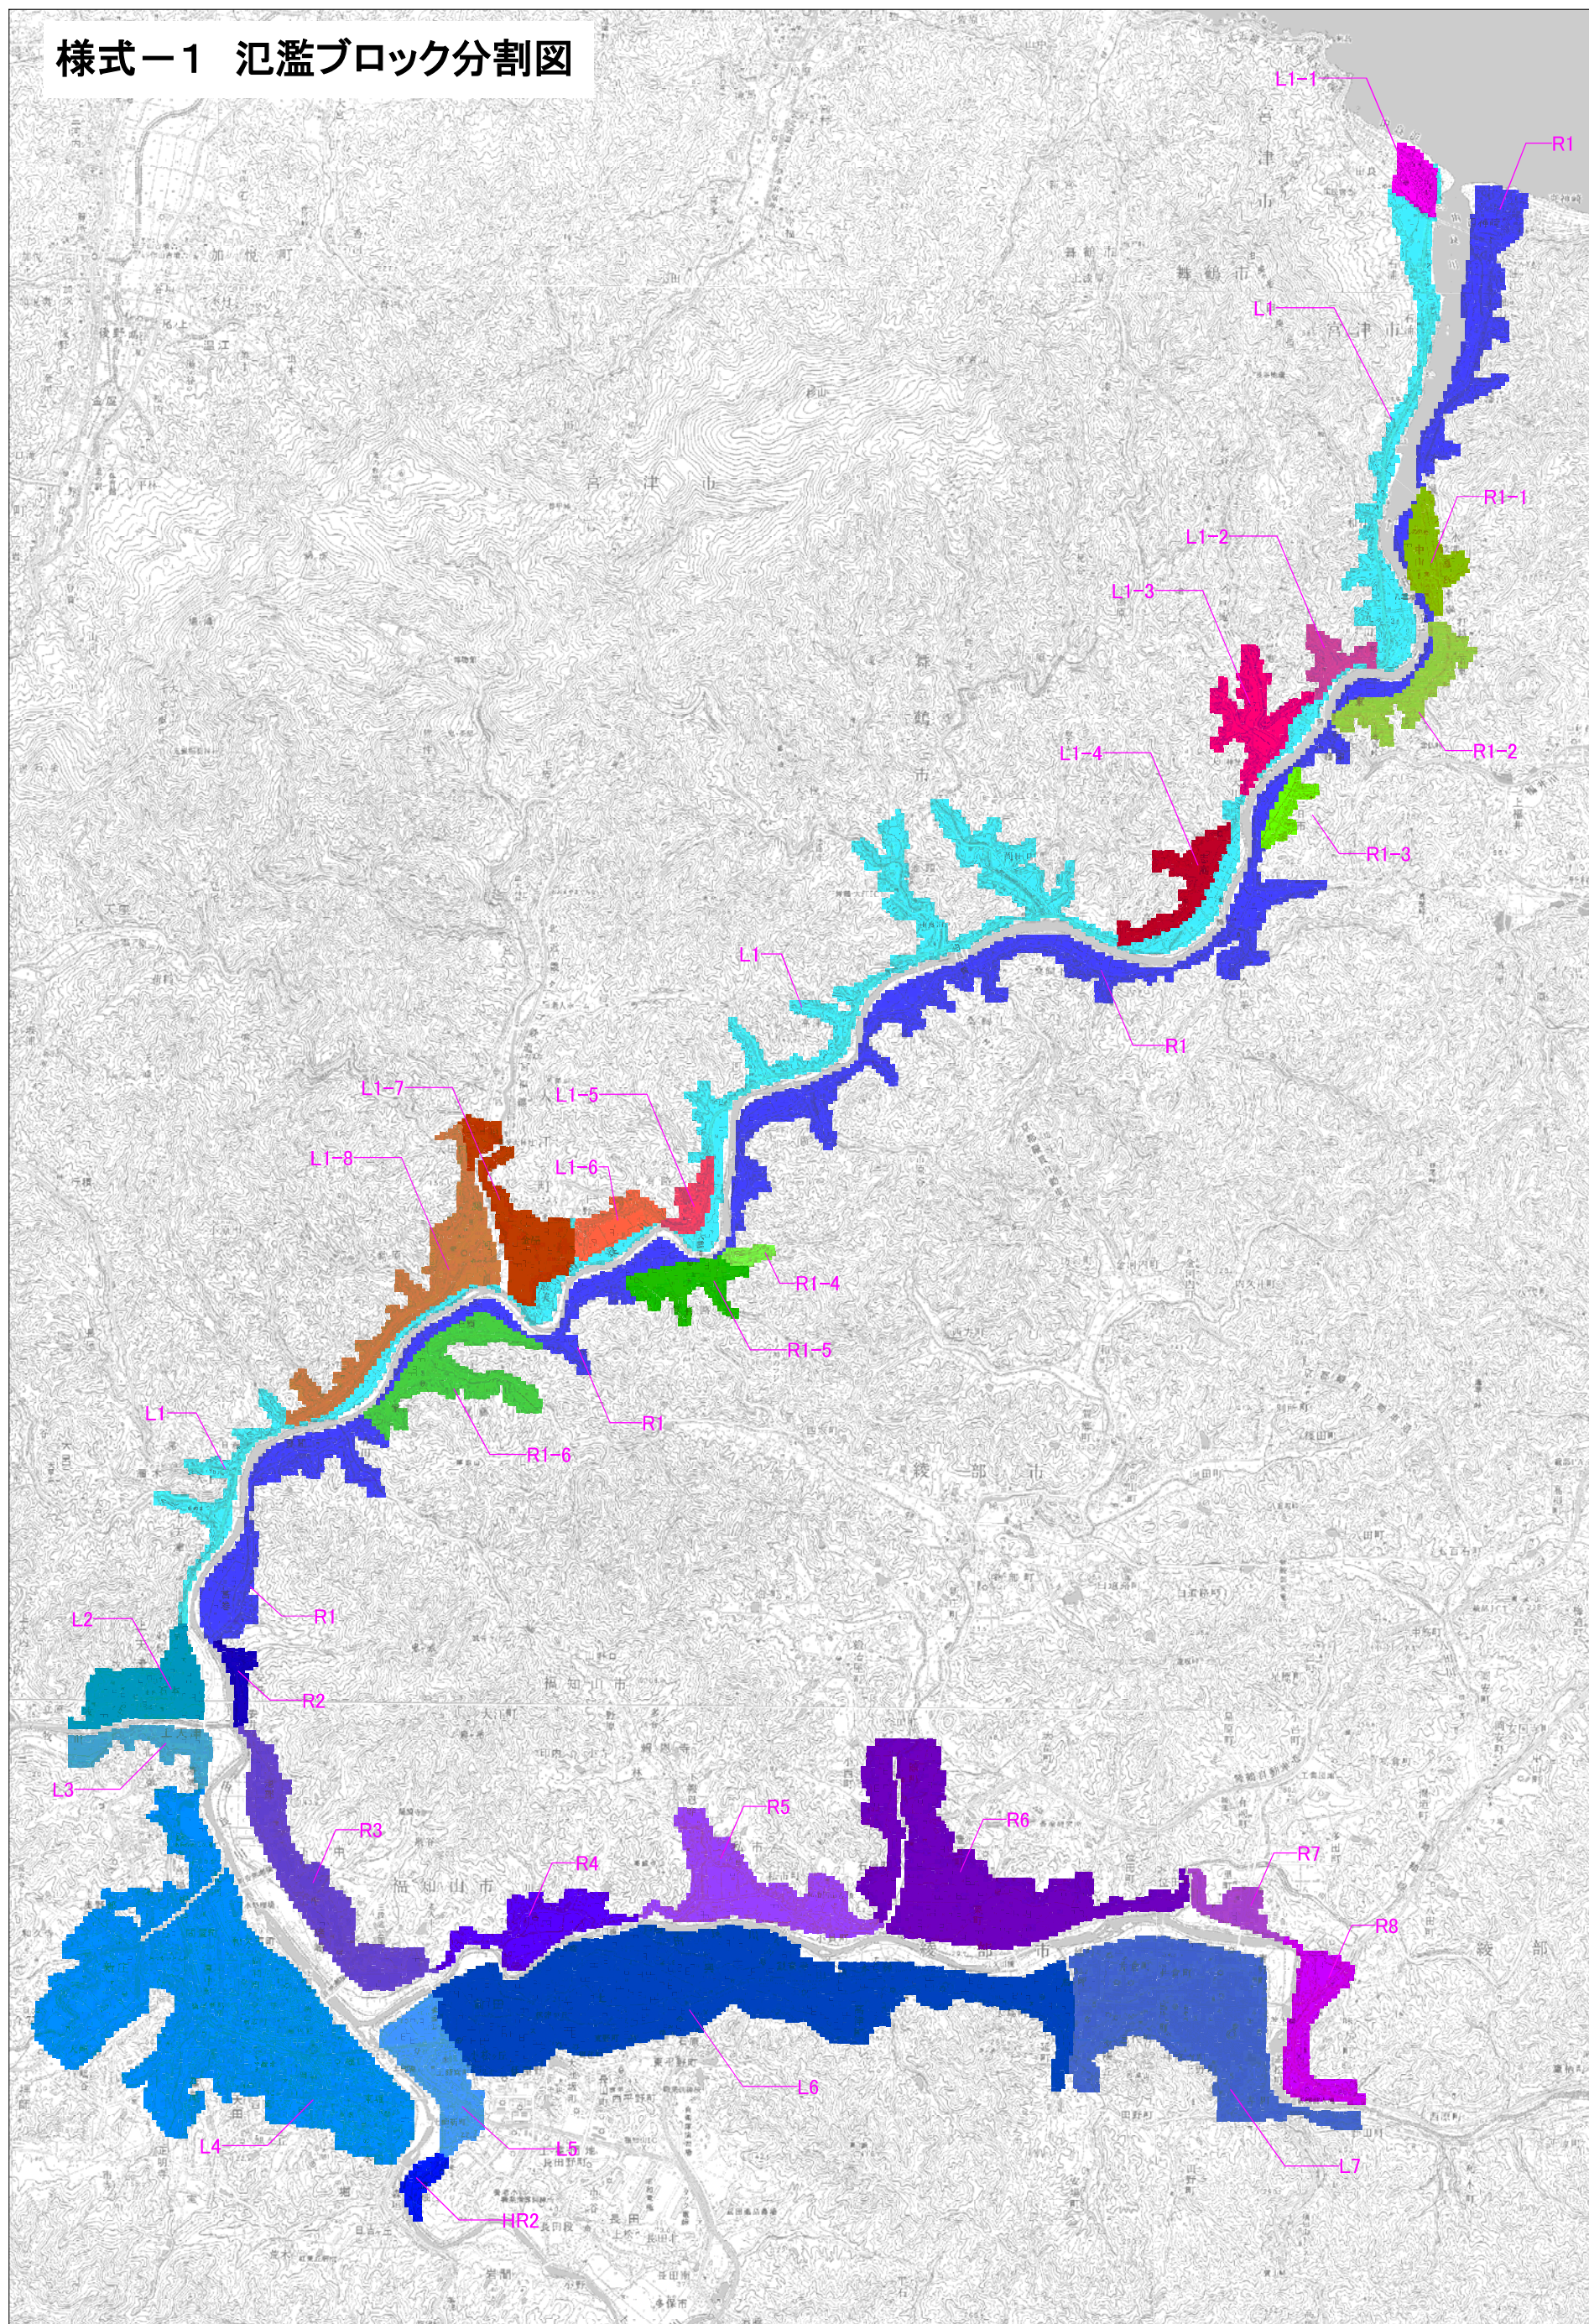

様式ー2 資産データ 水系名：由良川 河川名：由良川 国勢調査年：H22 経済センサス調査年：H24

氾濫 ブロッ ク	ブロッ ク 面積 (ha)	一般資産等基礎数量								一般資産額（百万円）						農作物資産額（百万円）			一般資産 額等合計 (百万円)	備考
		人口 (人)	世帯数 (世帯)	従業者 数 (産業 分類別 に算 出) (人)	農漁家 数 (世帯)	延床面 積 (ha)	水田面 積 (ha)	畑面積 (ha)	家屋	家庭用 品	事業所資産		農漁家資産		小計	水稻	畑作物	小計		
											償却	在庫	償却	在庫						
L1	793.7	1,116.3	412.5	259.2	55.7	100,543.8	26,655.6	10,510.2	20,008.2	5,456.8	997.3	515.1	86.6	25.6	27,089.6	255.1	98.1	353.1	27,442.8	
L1-1	37.5	499.5	207.2	100.8	7.2	33,707.8	655.3	52.4	6,707.9	2,741.2	255.4	186.1	11.1	3.3	9,904.9	6.3	0.5	6.8	9,911.7	
L1-2	38.8	174.8	56.2	76.2	9.9	8,455.5	786.3	340.7	1,682.6	743.9	105.8	6.1	15.4	4.5	2,558.3	7.5	3.2	10.7	2,569.0	
L1-3	102.6	164.5	61.7	38.4	11.6	17,510.3	4,770.2	183.5	3,484.6	816.9	56.0	40.1	18.0	5.3	4,420.8	45.7	1.7	47.4	4,468.2	
L1-4	74.3	312.1	106.3	96.4	13.0	20,017.4	3,197.6	131.1	3,983.5	1,406.0	262.3	215.4	20.2	6.0	5,893.3	30.6	1.2	31.8	5,925.1	
L1-5	34.4	134.8	49.4	27.3	6.4	10,339.8	1,389.1	52.4	2,057.6	652.9	51.2	20.2	10.0	2.9	2,794.8	13.3	0.5	13.8	2,808.6	
L1-6	55.6	197.1	69.1	54.6	11.0	18,522.2	2,673.4	366.9	3,685.9	914.5	79.8	136.5	17.1	5.0	4,838.7	25.6	3.4	29.0	4,867.7	
L1-7	128.0	751.7	274.8	105.1	17.9	63,306.1	5,818.6	498.0	12,597.9	3,635.4	300.5	263.0	27.8	8.2	16,832.8	55.7	4.7	60.3	16,893.1	
L1-8	188.4	1,059.8	415.4	547.9	12.2	91,640.8	3,721.8	2,463.7	18,236.5	5,495.8	1,288.6	905.7	19.0	5.6	25,951.2	35.6	23.0	58.6	26,009.8	
L2	121.7	553.8	205.8	188.8	22.0	46,956.3	4,298.4	838.7	9,344.3	2,722.3	505.7	394.2	34.2	10.1	13,010.8	41.1	7.8	49.0	13,059.8	
L3	66.4	214.9	38.2	100.7	6.1	13,041.6	3,957.7	0.0	2,595.3	505.4	168.4	89.9	9.5	2.8	3,371.2	37.9	0.0	37.9	3,409.1	
L4	991.3	24,872.4	10,500.7	18,264.3	141.2	2,411,730.0	17,455.9	969.8	479,934.3	138,924.1	61,227.3	23,460.6	219.5	64.8	703,830.6	167.0	9.1	176.1	704,006.7	
L5	127.0	2,905.6	1,199.4	2,249.7	20.1	257,751.2	2,490.0	681.5	51,292.5	15,868.4	7,060.8	5,586.5	31.2	9.2	79,848.6	23.8	6.4	30.2	79,878.7	
L6	851.7	12,195.2	4,801.0	2,794.5	158.7	1,106,640.3	30,429.8	12,764.3	220,221.4	63,517.0	8,148.1	4,116.8	246.8	72.8	296,323.0	291.2	119.1	410.3	296,733.2	
L7	449.4	11,402.2	4,896.5	6,282.5	87.1	1,058,134.4	7,758.2	1,887.1	210,568.8	64,780.1	17,818.3	10,298.4	135.5	40.0	303,641.0	74.2	17.6	91.8	303,732.9	
R1	882.4	1,788.4	615.4	225.2	103.0	146,775.3	29,145.5	16,014.3	29,208.3	8,142.2	511.9	235.6	160.2	47.3	38,305.4	278.9	149.4	428.3	38,733.7	
R1-1	69.0	139.9	49.5	7.3	2.2	10,440.3	3,014.2	786.3	2,077.6	654.8	22.2	16.4	3.5	1.0	2,775.5	28.8	7.3	36.2	2,811.7	
R1-2	89.5	217.9	71.0	13.4	16.4	14,962.4	3,957.7	288.3	2,977.5	939.8	19.3	6.2	25.5	7.5	3,975.9	37.9	2.7	40.6	4,016.5	
R1-3	31.5	116.5	41.5	9.1	10.1	4,681.1	1,808.5	0.0	931.5	549.6	15.5	13.5	15.7	4.7	1,530.4	17.3	0.0	17.3	1,547.7	
R1-4	13.6	63.5	23.9	1.1	4.6	1,523.9	681.5	0.0	303.3	316.6	2.0	1.2	7.1	2.1	632.3	6.5	0.0	6.5	638.8	
R1-5	73.7	256.5	101.7	24.8	11.1	21,054.7	2,332.7	209.7	4,189.9	1,345.3	47.8	36.3	17.3	5.1	5,641.7	22.3	2.0	24.3	5,666.0	
R1-6	134.3	318.6	111.5	24.2	15.4	38,504.5	5,006.1	629.0	7,662.4	1,475.0	100.3	45.5	23.9	7.1	9,314.2	47.9	5.9	53.8	9,368.0	
R2	26.0	71.8	27.4	0.0	5.0	10,147.2	366.9	0.0	2,019.3	362.1	0.0	0.0	7.8	2.3	2,391.5	3.5	0.0	3.5	2,395.0	
R3	198.6	1,851.7	726.4	266.2	58.6	106,024.0	8,072.7	2,332.7	21,098.8	9,610.7	646.3	334.7	91.2	26.9	31,808.6	77.3	21.8	99.0	31,907.6	
R4	109.1	387.2	147.2	60.7	27.2	150,508.9	4,036.3	2,385.1	29,951.3	1,947.6	204.5	93.7	42.3	12.5	32,251.9	38.6	22.3	60.9	32,312.7	
R5	192.3	652.6	230.6	106.1	34.6	74,370.3	10,536.4	1,415.3	14,799.7	3,050.9	376.3	263.6	53.8	15.9	18,560.0	100.8	13.2	114.0	18,674.1	
R6	428.7	2,468.2	889.2	481.9	91.4	167,523.1	22,330.9	2,673.4	33,337.1	11,763.4	1,658.3	1,189.0	142.1	42.0	48,131.9	213.7	24.9	238.6	48,370.5	
R7	42.2	350.3	138.5	109.2	6.3	12,825.2	445.6	812.5	2,552.2	1,831.9	253.1	132.6	9.8	2.9	4,782.6	4.3	7.6	11.8	4,794.4	
R8	102.1	1,268.7	517.5	424.8	16.3	167,768.6	1,834.7	1,048.4	33,386.0	6,846.9	1,202.3	685.5	25.3	7.5	42,153.4	17.6	9.8	27.3	42,180.7	
HR2	25.5	148.6	59.7	337.6	3.7	31,464.8	707.7	0.0	6,261.5	789.6	3,461.8	1,774.4	5.7	1.7	12,294.7	6.8	0.0	6.8	12,301.5	
合計	6,479.3	66,654.9	27,045.1	33,277.9	985.9	6,216,871.8	210,335.2	60,335.4	1,237,157.5	357,807.0	106,847.0	51,062.7	1,533.0	452.5	1,754,859.6	2,012.7	562.9	2,575.6	1,757,435.2	

様式-3			被害額（事業実施前H15）				水系名：由良川				河川名：由良川				流量規模：1/1				(百万円)		
位置 ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	農作物被害額				公共土木施設 等被害額	営業停止損 失	家屋における 応急対策費用			事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考
			償却	在庫	償却	在庫		水稲	畑作物	小計	清掃労働対 価			代替活動等	小計						
L1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

様式-3		被害額（事業実施前H15）						水系名：由良川				河川名：由良川				流量規模：1/2				(百万円)	
位置 ブロック	家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稲	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
L1	2.1	0.0	0.0	0.0	0.0	0.0	2.1	5.3	3.6	8.9	3.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.6	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	2.3	0.2	0.0	0.0	0.0	0.0	2.5	0.0	0.7	0.7	4.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	7.5	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7	10.3	13.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	13.0	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	4.4	0.2	0.1	0.0	0.0	0.0	4.6	8.3	15.2	23.5	7.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	36.1	

様式－3		被害額（事業実施前H15）					水系名：由良川				河川名：由良川				流量規模：1/10				（百万円）				
応急 ブロッ ク	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対 価	代替活動等	小計										
			償却	在庫	償却	在庫																	
L1	103.8	9.2	6.0	2.0	0.2	0.1	121.2	44.6	33.0	77.7	205.4	1.8	0.4	0.4	0.8	3.3	0.0	5.9	410.2				
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-2	3.3	0.5	0.1	0.0	0.0	0.0	3.8	0.8	0.6	1.4	6.4	0.1	0.1	0.1	0.2	0.1	0.0	0.3	11.9				
L1-3	9.4	0.8	0.7	0.3	0.0	0.0	11.1	9.7	0.5	10.1	18.8	0.5	0.0	0.1	0.1	0.2	0.0	0.8	40.9				
L1-4	72.8	16.3	9.4	4.6	0.2	0.1	103.3	8.9	0.4	9.3	175.0	3.3	0.8	1.3	2.2	3.0	0.0	8.4	296.0				
L1-5	2.4	0.1	0.2	0.0	0.0	0.0	2.8	1.7	0.3	2.0	4.7	0.1	0.0	0.0	0.1	0.1	0.0	0.3	9.7				
L1-6	6.6	0.7	0.0	0.0	0.0	0.0	7.4	7.7	1.7	9.4	12.5	0.0	0.0	0.1	0.1	0.0	0.0	0.1	29.3				
L1-7	7.5	0.4	0.1	0.0	0.0	0.0	8.0	2.6	0.4	3.0	13.6	0.0	0.0	0.1	0.1	0.0	0.0	0.2	24.8				
L1-8	329.7	0.4	2.3	0.8	0.0	0.0	333.2	11.2	10.9	22.1	564.4	0.9	0.1	0.1	0.2	0.7	0.0	1.8	921.4				
L2	127.6	16.4	0.5	0.3	0.0	0.0	144.8	13.4	0.0	13.4	245.3	0.2	0.7	1.0	1.7	0.4	0.0	2.3	405.9				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	27.9	3.9	4.2	1.3	0.0	0.0	37.2	0.0	0.0	0.0	63.1	2.7	0.7	1.3	2.0	1.4	0.0	6.1	106.4				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	2,110.2	51.2	18.5	10.1	0.2	0.1	2,190.3	38.8	42.0	80.8	3,710.4	6.9	3.8	6.3	10.1	2.6	0.0	19.6	6,001.1				
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1	44.6	2.1	2.3	0.7	0.1	0.0	49.6	78.4	55.5	133.9	84.1	0.8	0.2	0.3	0.5	0.5	0.0	1.8	269.4				
R1-1	18.5	7.3	0.1	0.0	0.0	0.0	25.9	9.1	2.0	11.0	43.9	0.0	0.3	0.5	0.7	0.1	0.0	0.8	81.7				
R1-2	21.0	1.9	0.0	0.0	0.1	0.0	23.0	10.7	0.8	11.5	39.0	0.0	0.1	0.2	0.3	0.0	0.0	0.3	73.8				
R1-3	5.0	0.9	1.1	0.5	0.0	0.0	7.6	6.8	0.0	6.8	12.8	0.5	0.0	0.1	0.1	0.3	0.0	0.9	28.0				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	2.0	0.7	0.1	0.0	0.0	0.0	2.8	1.2	0.3	1.5	4.8	0.0	0.0	0.1	0.1	0.1	0.0	0.2	9.3				
R1-6	2.7	0.1	0.0	0.0	0.0	0.0	2.9	4.1	2.4	6.5	4.9	0.0	0.0	0.0	0.1	0.0	0.0	0.1	14.3				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	1,121.8	16.7	0.3	0.0	0.2	0.1	1,139.2	8.3	9.2	17.5	1,929.8	0.1	0.7	0.9	1.6	0.4	0.0	2.1	3,088.5				
R5	313.4	9.9	1.4	0.6	0.1	0.0	325.4	23.9	6.0	29.9	551.3	0.4	0.5	0.9	1.4	0.4	0.0	2.2	908.9				
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	4,330.3	139.5	47.0	21.3	1.1	0.4	4,539.6	281.9	165.8	447.7	7,690.1	18.3	8.4	13.8	22.2	13.5	0.0	54.0	12,731.4				

様式－3		被害額（事業実施前H15）					水系名：由良川					河川名：由良川					流量規模：1/20				（百万円）			
応急 ブロック	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対価	代替活動等	小計											
			償却	在庫	償却	在庫																		
L1	208.9	13.6	11.3	3.3	0.3	0.1	237.4	59.6	40.3	99.9	402.2	3.3	0.8	1.1	1.9	6.0	0.0	11.2	750.6					
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-2	25.9	8.9	0.8	0.0	0.2	0.1	35.9	1.6	1.2	2.9	60.9	0.5	0.4	0.7	1.1	0.3	0.0	2.0	101.6					
L1-3	129.2	9.6	9.0	2.7	0.2	0.1	150.7	15.9	0.7	16.6	255.4	5.1	0.6	0.9	1.5	2.4	0.0	9.0	431.6					
L1-4	195.6	66.7	27.7	14.3	0.5	0.2	305.0	10.6	0.5	11.2	516.6	8.2	2.7	3.5	6.3	8.9	0.0	23.3	856.0					
L1-5	8.0	1.7	0.6	0.1	0.0	0.0	10.5	2.5	0.3	2.8	17.8	0.3	0.1	0.1	0.2	0.3	0.0	0.7	31.8					
L1-6	22.4	2.8	0.0	0.0	0.1	0.0	25.3	8.6	1.7	10.3	42.8	0.0	0.2	0.2	0.3	0.0	0.0	0.4	78.8					
L1-7	36.1	3.7	0.4	0.2	0.0	0.0	40.5	17.6	0.4	17.9	68.7	0.1	0.2	0.2	0.4	0.2	0.0	0.7	127.9					
L1-8	485.8	4.3	6.8	3.0	0.0	0.0	500.0	11.9	11.0	22.9	846.9	2.1	0.2	0.3	0.5	2.5	0.0	5.2	1,375.0					
L2	212.0	37.7	1.9	1.8	0.2	0.1	253.6	13.7	0.0	13.7	429.7	1.2	1.6	2.3	3.9	0.9	0.0	6.0	703.0					
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L4	26,269.5	9,942.6	6,593.7	2,018.9	8.2	3.6	44,836.6	19.6	4.7	24.3	75,953.2	2,238.7	451.9	664.9	1,116.8	1,419.1	0.0	4,774.5	125,588.6					
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L6	7,384.6	559.1	417.5	70.3	3.4	1.4	8,436.3	80.9	53.4	134.4	14,291.1	93.6	28.2	49.3	77.5	45.2	0.0	216.3	23,078.0					
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1	164.8	22.5	23.5	4.2	0.6	0.2	215.8	87.6	63.7	151.3	365.5	7.6	1.0	1.7	2.7	2.5	0.0	12.8	745.4					
R1-1	32.3	14.1	0.4	0.1	0.0	0.0	46.9	10.9	2.4	13.3	79.5	0.2	0.5	0.7	1.2	0.3	0.0	1.7	141.4					
R1-2	79.5	15.6	0.1	0.0	0.4	0.2	95.7	12.1	1.8	13.8	162.2	0.1	0.7	0.9	1.6	0.1	0.0	1.7	273.4					
R1-3	21.4	7.6	4.0	2.5	0.2	0.1	35.7	7.2	0.0	7.2	60.6	1.3	0.4	0.7	1.2	1.2	0.0	3.6	107.1					
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-5	4.3	2.2	0.2	0.1	0.0	0.0	6.9	3.1	0.3	3.4	11.6	0.1	0.1	0.1	0.2	0.2	0.0	0.5	22.4					
R1-6	9.9	0.9	0.0	0.0	0.0	0.0	10.9	4.8	2.7	7.4	18.5	0.0	0.0	0.1	0.1	0.0	0.0	0.1	36.9					
R2	1.6	0.5	0.0	0.0	0.0	0.0	2.1	0.0	0.0	0.0	3.5	0.0	0.0	0.0	0.1	0.0	0.0	0.1	5.6					
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R4	2,135.0	38.4	0.7	0.1	0.4	0.2	2,174.8	9.5	11.0	20.5	3,684.2	0.3	1.8	2.2	3.9	0.9	0.0	5.2	5,884.7					
R5	586.0	36.9	8.0	3.2	0.5	0.2	634.9	25.6	6.5	32.1	1,075.3	2.1	1.6	2.4	4.0	1.5	0.0	7.6	1,749.7					
R6	72.3	73.9	2.4	1.4	0.5	0.2	150.7	0.0	0.0	0.0	255.3	0.6	3.0	4.4	7.4	1.1	0.0	9.1	415.1					
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
合計	38,085.2	10,863.2	7,109.1	2,126.3	15.6	6.7	58,206.0	403.3	202.6	605.8	98,601.0	2,365.3	496.0	736.7	1,232.7	1,493.6	0.0	5,091.7	162,504.5					

様式－３		被害額（事業実施前H15）						水系名：由良川			河川名：由良川			流量規模：1/50			(百万円)					
氾濫 ブロッ ク	一般資産被害額								農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価				代替活動等	小計						
			償却	在庫	償却	在庫																
L1	589.2	91.4	35.8	10.4	1.6	0.7	729.0	75.6	44.9	120.5	1,235.0	10.7	4.1	6.2	10.3	14.8	0.0	35.8	2,120.3			
L1-1	4.6	1.1	0.5	0.3	0.0	0.0	6.4	0.0	0.0	0.0	10.9	0.2	0.2	0.3	0.5	0.1	0.0	0.8	18.1			
L1-2	64.6	24.5	3.2	0.1	0.4	0.2	93.0	2.0	1.5	3.6	157.5	1.4	1.0	1.3	2.3	1.0	0.0	4.7	258.7			
L1-3	290.1	42.4	22.7	9.1	0.7	0.3	365.1	17.2	0.9	18.1	618.5	9.3	1.7	2.1	3.8	6.3	0.0	19.4	1,021.0			
L1-4	568.9	170.3	63.4	37.7	1.7	0.7	842.6	12.0	0.7	12.7	1,427.3	18.2	6.8	7.6	14.4	23.0	0.0	55.6	2,338.1			
L1-5	65.1	21.6	4.2	1.0	0.2	0.1	92.2	3.7	0.3	4.0	156.1	1.6	0.9	1.4	2.3	2.3	0.0	6.2	258.5			
L1-6	99.9	15.7	3.8	3.8	0.4	0.2	123.7	9.3	1.8	11.1	209.5	1.9	0.6	0.9	1.6	0.5	0.0	3.9	348.2			
L1-7	107.3	12.3	1.9	1.1	0.1	0.0	122.7	19.1	0.4	19.5	207.8	0.5	0.5	0.7	1.2	0.7	0.0	2.5	352.4			
L1-8	1,136.4	53.4	36.3	16.3	0.2	0.1	1,242.7	12.3	11.4	23.7	2,105.1	12.7	2.3	3.6	5.9	10.9	0.0	29.5	3,401.0			
L2	463.1	98.9	7.4	6.9	0.8	0.3	577.3	18.6	0.0	18.6	977.9	3.5	4.1	4.7	8.8	3.1	0.0	15.4	1,589.2			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	92,180.6	36,811.1	23,006.8	8,251.0	26.1	10.2	160,285.7	21.7	4.9	26.7	271,524.1	6,749.3	1,620.7	1,386.2	3,006.9	6,169.9	0.0	15,926.2	447,762.6			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	20,092.4	4,202.7	1,742.4	676.9	13.6	5.6	26,733.6	93.1	60.2	153.2	45,286.7	407.7	176.6	200.3	376.8	252.1	0.0	1,036.7	73,210.3			
L7	14,835.2	3,016.3	1,379.6	691.0	8.5	3.3	19,933.9	28.7	8.4	37.1	33,768.0	424.3	128.7	154.3	283.1	230.0	0.0	937.4	54,676.3			
R1	592.5	96.5	78.8	17.3	2.2	1.0	788.3	95.3	68.2	163.4	1,335.3	21.2	4.3	5.2	9.4	10.2	0.0	40.8	2,327.8			
R1-1	128.1	37.8	2.0	0.6	0.1	0.0	168.7	11.0	3.6	14.6	285.8	0.6	1.7	2.3	4.1	1.4	0.0	6.1	475.2			
R1-2	267.7	67.7	2.4	0.4	1.9	0.8	340.9	13.5	1.8	15.3	577.5	1.6	3.2	4.9	8.2	1.8	0.0	11.5	945.2			
R1-3	66.9	41.6	5.4	4.0	0.9	0.4	119.1	7.5	0.0	7.5	201.8	2.3	1.6	2.1	3.8	2.7	0.0	8.7	337.2			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	96.4	29.2	2.2	1.2	0.3	0.1	129.4	8.6	1.1	9.7	219.2	0.7	1.2	1.7	2.9	2.2	0.0	5.8	364.1			
R1-6	74.3	9.3	0.1	0.0	0.3	0.1	84.1	6.7	2.9	9.6	142.5	0.0	0.4	0.6	1.0	0.1	0.0	1.1	237.4			
R2	5.0	1.4	0.0	0.0	0.0	0.0	6.4	0.0	0.0	0.0	10.8	0.0	0.1	0.1	0.1	0.0	0.0	0.1	17.3			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	3,228.2	72.6	1.2	0.2	1.0	0.4	3,303.5	9.9	11.8	21.7	5,596.2	0.5	2.9	3.3	6.2	1.5	0.0	8.2	8,929.6			
R5	1,138.8	118.3	31.2	14.0	1.5	0.6	1,304.5	26.8	6.7	33.6	2,209.8	6.8	4.9	6.0	10.9	6.9	0.0	24.6	3,572.4			
R6	4,559.0	2,087.4	395.8	216.8	16.9	7.0	7,282.9	69.1	3.8	72.9	12,337.2	105.4	83.9	78.4	162.3	143.9	0.0	411.6	20,104.6			
R7	219.7	194.7	23.6	8.4	0.5	0.2	447.1	0.0	5.7	5.7	757.4	7.8	7.9	8.9	16.8	6.4	0.0	31.0	1,241.1			
R8	3,807.4	1,192.0	462.1	183.6	2.1	1.0	5,648.2	6.8	6.1	12.9	9,568.0	108.5	49.3	55.1	104.4	81.7	0.0	294.6	15,523.6			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.3	0.0	1.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	144,681.2	48,510.0	27,312.4	10,152.2	81.8	33.3	230,770.9	569.8	247.0	816.8	390,925.8	7,896.7	2,109.6	1,938.4	4,048.0	6,973.5	0.0	18,918.2	641,431.7			

様式－３		被害額（事業実施前H15）										水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)	
氾濫 ブロッ ク	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価	代替活動等	小計												
			償却	在庫	償却	在庫							償却	在庫			償却	在庫							
L1	1,838.0	468.6	130.4	46.5	6.6	2.7	2,492.8	88.7	46.0	134.7	4,222.8	37.4	20.0	27.3	47.4	49.3	0.0	134.1	6,984.5						
L1-1	23.1	3.5	1.6	0.8	0.0	0.0	29.0	2.2	0.0	2.2	49.1	0.8	0.5	1.0	1.6	0.4	0.0	2.8	83.1						
L1-2	157.4	62.6	7.9	0.3	1.0	0.4	229.7	2.4	1.7	4.0	389.1	3.0	2.5	2.8	5.3	2.7	0.0	11.0	633.7						
L1-3	571.9	91.4	35.5	16.7	1.4	0.6	717.5	18.3	0.9	19.2	1,215.4	16.1	3.6	3.8	7.3	12.0	0.0	35.4	1,987.4						
L1-4	1,111.4	371.4	106.0	71.9	3.4	1.4	1,665.5	12.4	0.7	13.1	2,821.4	35.9	15.2	14.2	29.4	45.3	0.0	110.6	4,610.7						
L1-5	403.2	139.1	12.3	4.2	1.7	0.7	561.3	4.4	0.3	4.7	950.8	5.3	5.6	6.0	11.5	10.0	0.0	26.8	1,543.6						
L1-6	281.3	51.1	11.6	15.5	1.0	0.4	361.0	9.5	1.8	11.3	611.4	5.6	2.1	2.3	4.4	2.1	0.0	12.1	995.8						
L1-7	401.3	44.5	8.5	5.8	0.1	0.1	460.4	20.3	0.9	21.2	779.9	2.3	2.1	2.3	4.4	2.9	0.0	9.6	1,271.1						
L1-8	3,486.2	432.5	177.7	87.3	1.4	0.6	4,185.7	13.3	11.8	25.1	7,090.5	55.5	17.8	22.2	40.0	63.1	0.0	158.6	11,459.9						
L2	876.8	229.3	23.3	21.3	2.1	0.9	1,153.7	19.7	0.0	19.7	1,954.4	10.0	9.3	9.5	18.8	9.9	0.0	38.6	3,166.4						
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L4	165,897.1	56,515.8	33,116.4	12,245.8	41.1	14.8	267,831.0	22.2	5.0	27.2	453,705.8	12,436.2	2,577.7	1,773.5	4,351.2	9,451.1	0.0	28,238.5	747,802.5						
L5	23,395.8	8,022.2	3,502.9	2,191.7	11.4	4.2	37,128.1	13.4	4.5	17.9	62,895.1	1,242.2	324.4	254.0	578.3	723.9	0.0	2,544.5	102,585.6						
L6	38,442.0	7,775.2	2,475.6	1,033.6	29.3	12.3	49,767.9	106.1	63.8	169.9	84,306.9	587.6	306.8	303.9	610.6	404.1	0.0	1,602.3	135,847.0						
L7	18,835.5	4,341.2	2,148.9	1,088.3	11.2	4.6	26,429.6	29.4	8.2	37.6	44,771.7	600.6	179.8	203.3	383.1	330.4	0.0	1,314.1	72,553.0						
R1	1,786.8	366.9	141.1	37.4	7.8	3.0	2,343.0	103.2	70.5	173.7	3,969.0	47.6	15.3	17.9	33.2	28.9	0.0	109.6	6,595.4						
R1-1	254.9	90.8	5.2	2.0	0.2	0.1	353.3	11.4	4.1	15.4	598.5	1.4	3.3	4.1	7.4	3.3	0.0	12.1	979.3						
R1-2	585.2	212.5	6.5	1.4	4.5	2.0	812.1	14.1	1.8	15.9	1,375.6	2.8	8.4	9.5	17.9	5.0	0.0	25.7	2,229.2						
R1-3	144.9	98.7	6.4	5.0	1.9	0.8	257.7	7.9	0.0	7.9	436.6	3.4	4.0	4.1	8.0	4.1	0.0	15.5	717.6						
R1-4	13.0	15.6	0.2	0.1	0.3	0.1	29.2	2.2	0.0	2.2	49.4	0.1	0.7	0.9	1.5	0.4	0.0	2.0	82.8						
R1-5	450.7	156.9	9.9	5.9	1.5	0.6	625.5	9.4	1.2	10.6	1,059.6	3.8	6.9	7.7	14.6	11.4	0.0	29.8	1,725.5						
R1-6	274.4	45.7	0.4	0.3	0.9	0.4	322.1	8.3	3.1	11.4	545.7	0.3	2.0	2.7	4.7	0.7	0.0	5.7	884.8						
R2	79.1	9.9	0.0	0.0	0.2	0.1	89.3	0.1	0.0	0.1	151.3	0.0	0.5	0.9	1.4	0.0	0.0	1.4	242.1						
R3	4,166.1	1,843.2	152.4	80.8	13.2	5.0	6,260.6	39.5	19.6	59.2	10,605.5	52.1	74.7	65.7	140.3	76.9	0.0	269.4	17,194.6						
R4	4,590.4	134.4	2.4	0.4	1.9	0.7	4,730.1	10.2	11.9	22.1	8,012.8	0.9	5.5	5.7	11.2	2.9	0.0	15.0	12,779.9						
R5	2,055.7	261.2	100.0	54.2	3.5	1.4	2,476.0	28.8	7.0	7.5	4,194.3	17.3	10.5	10.1	20.6	18.4	0.0	56.3	6,762.2						
R6	7,227.7	3,154.9	516.4	312.3	26.9	10.1	11,248.1	89.3	8.5	97.8	19,054.2	156.2	127.9	99.9	222.8	220.3	0.0	599.2	30,999.3						
R7	447.8	397.7	48.5	20.1	1.1	0.4	915.5	0.0	5.9	5.9	1,550.9	15.5	15.7	14.3	30.0	13.8	0.0	59.3	2,531.7						
R8	8,864.6	2,656.0	744.0	363.8	4.9	1.9	12,635.0	7.7	6.4	14.2	21,403.7	206.1	102.3	84.6	186.9	178.1	0.0	571.1	34,624.0						
HR2	132.1	12.0	2.7	1.8	0.1	0.1	148.9	3.1	0.0	3.1	252.2	1.1	0.7	1.3	2.0	0.8	0.0	3.9	408.0						
合計	286,793.2	88,005.8	43,494.4	17,715.3	180.3	70.4	436,259.5	697.3	285.7	983.0	739,023.5	15,546.9	3,840.7	2,955.1	6,795.8	11,672.2	0.0	34,014.9	1,210,280.8						

様式－３			被害額（現況H29）						水系名：由良川				河川名：由良川				流量規模：1/3				(百万円)	
位置 ブロッ ク	一般資産被害額						農作物被害額			公共土木施 設等被害額	営業停止損 失	家屋における 応急対策費用			事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考			
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物			小計	清掃労働対 価	代替活動等						小計		
			償却	在庫	償却	在庫																
L1	17.9	0.0	0.7	0.1	0.0	0.0	18.7	14.8	12.7	27.5	31.6	0.3	0.0	0.0	0.0	0.4	0.0	0.7	78.5			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.4	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	0.7	0.0	0.0	0.0	0.0	0.0	0.7	0.6	0.6	1.1	1.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.0		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	1.2	0.0	0.0	0.0	0.0	0.0	1.2	31.7	24.5	56.2	2.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	59.5		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.2	0.4	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.6		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	19.8	0.0	0.7	0.1	0.0	0.0	20.6	52.4	38.6	91.0	34.9	0.3	0.0	0.0	0.0	0.4	0.0	0.7	147.1			

様式－３		被害額（現況H29）					水系名：由良川					河川名：由良川					流量規模：1/5					(百万円)		
位置 ブロッ ク	一般資産被害額						農作物被害額			公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考					
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物			小計												
			償却	在庫	償却	在庫																		
L1	46.9	0.0	1.9	0.4	0.1	0.0	49.2	38.3	25.9	64.2	83.4	0.7	0.0	0.0	0.0	0.8	0.0	1.5	198.3					
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.8	1.3	6.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.1					
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L6	2,553.1	253.8	36.8	11.7	4.4	1.8	2,861.5	36.0	32.4	68.5	4,847.4	13.5	10.6	16.8	27.5	8.2	0.0	49.1	7,826.5					
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1	4.8	0.0	0.1	0.0	0.0	0.0	5.0	54.4	41.6	96.0	8.4	0.1	0.0	0.0	0.0	0.1	0.0	0.1	109.5					
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-2	1.3	0.0	0.0	0.0	0.0	0.0	1.3	5.8	0.5	6.2	2.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9.8					
R1-3	1.7	0.1	0.5	0.2	0.0	0.0	2.6	6.4	0.0	6.4	4.4	0.4	0.0	0.0	0.1	0.1	0.0	0.5	13.8					
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R4	307.5	3.7	0.1	0.0	0.1	0.0	311.4	5.9	6.5	12.3	527.5	0.0	0.2	0.3	0.5	0.1	0.0	0.6	851.8					
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
合計	2,915.4	257.6	39.4	12.3	4.5	1.9	3,231.0	151.5	108.2	259.6	5,473.3	14.6	10.8	17.2	28.0	9.3	0.0	51.9	9,015.8					

様式－３		被害額（現況H29）						水系名：由良川			河川名：由良川			流量規模：1/50						(百万円)		
氾濫 ブロッ ク	一般資産被害額								農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価	代替活動等			小計							
			償却	在庫	償却	在庫																
L1	579.0	43.1	27.8	8.5	1.0	0.4	659.7	80.6	45.9	126.5	1,117.6	8.5	2.2	3.9	6.1	12.4	0.0	27.0	1,930.8			
L1-1	4.6	1.1	0.5	0.3	0.0	0.0	6.4	0.3	0.0	0.3	10.9	0.2	0.2	0.3	0.5	0.1	0.0	0.8	18.4			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	92.2	13.4	3.8	3.8	0.4	0.1	113.7	9.3	1.8	11.1	192.6	1.9	0.5	0.7	1.3	0.5	0.0	3.6	320.9			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	72,516.6	28,956.1	19,404.4	6,645.1	20.4	8.5	127,551.1	21.7	4.9	26.6	216,071.6	5,475.7	1,301.4	1,245.8	2,547.1	4,843.9	0.0	12,866.7	356,516.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	17,938.1	4,257.1	1,738.1	672.2	16.4	6.8	24,628.7	88.0	49.6	137.6	41,721.0	409.4	176.3	200.6	376.9	254.7	0.0	1,041.0	67,528.3			
L7	14,835.2	3,016.3	1,379.6	691.0	8.5	3.3	19,933.9	28.6	8.4	37.0	33,768.0	424.3	128.7	154.3	283.1	230.0	0.0	937.4	54,676.3			
R1	437.8	20.2	26.3	4.6	0.9	0.4	490.2	70.3	167.3	830.5	8.5	1.0	1.7	2.7	3.9	0.0	15.2	1,503.1				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	191.3	48.9	0.0	0.0	1.4	0.6	242.2	8.4	1.8	11.2	410.3	0.0	2.0	2.5	4.5	0.0	0.0	4.5	668.2			
R1-3	86.6	59.6	5.8	4.3	1.1	0.5	157.8	7.8	0.0	7.8	267.3	2.5	2.4	2.7	5.2	3.2	0.0	10.8	443.7			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	2,492.7	52.4	0.9	0.2	0.7	0.3	2,547.1	9.8	11.6	21.3	4,314.9	0.4	2.2	2.6	4.8	1.2	0.0	6.4	6,889.7			
R5	2,839.2	338.5	88.6	47.2	4.0	1.6	3,319.1	39.6	9.0	48.6	5,022.6	16.7	13.3	12.9	26.2	20.7	0.0	63.6	9,954.0			
R6	4,832.9	2,198.5	415.6	231.3	17.8	7.3	7,703.4	79.3	4.1	83.5	13,049.5	110.2	88.0	81.7	169.7	151.2	0.0	431.1	21,267.4			
R7	219.7	194.7	23.6	8.4	0.5	0.2	447.1	0.0	5.7	5.7	757.4	7.8	7.9	8.9	16.8	6.4	0.0	31.0	1,241.1			
R8	3,807.4	1,192.0	462.1	183.6	2.1	1.0	5,648.2	6.8	6.1	12.9	9,568.0	108.5	49.3	55.1	104.4	81.7	0.0	294.6	15,523.6			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.0	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	120,873.3	40,391.9	23,576.8	8,800.4	75.2	31.0	193,448.7	478.5	219.0	697.5	327,702.0	6,574.6	1,775.4	1,773.8	3,549.2	5,609.9	0.0	15,733.7	537,581.8			

様式－３		被害額（現況H29）										水系名：由良川			河川名：由良川			流量規模：1/100			(百万円)			
汎 越 ブ ロ ッ ク	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等	小計											
			償却	在庫	償却	在庫																		
L1	1,589.0	326.5	104.9	39.3	5.2	2.1	2,067.1	91.2	46.4	137.6	3,501.6	31.6	14.4	22.7	37.1	41.0	0.0	109.7	5,816.0					
L1-1	31.8	5.1	2.3	1.2	0.0	0.0	40.4	2.2	0.0	2.2	68.4	1.1	0.8	1.5	2.3	0.6	0.0	4.0	115.0					
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-3	855.9	133.7	42.8	22.7	1.9	0.8	1,057.7	20.9	1.2	22.2	1,791.8	23.2	5.3	4.5	9.8	17.3	0.0	50.2	2,921.9					
L1-4	1,484.0	526.6	136.9	93.5	4.9	1.9	2,247.8	19.6	1.0	20.5	3,807.8	47.4	20.6	18.5	39.1	57.8	0.0	144.2	6,220.4					
L1-5	331.6	111.2	11.3	3.6	1.4	0.6	459.7	8.6	0.4	9.0	778.7	4.4	4.6	5.5	10.1	8.1	0.0	22.5	1,270.0					
L1-6	228.0	40.0	10.5	13.2	0.8	0.3	292.8	9.5	1.8	11.3	496.0	4.8	1.6	1.8	3.4	1.7	0.0	9.9	810.1					
L1-7	4.9	0.8	0.3	0.2	0.0	0.0	6.2	0.0	0.5	0.5	10.5	0.1	0.0	0.0	0.1	0.2	0.0	0.4	17.6					
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L4	150,919.1	53,374.2	31,131.1	11,554.2	38.4	13.9	247,031.0	20.5	4.8	25.3	418,470.5	11,127.7	2,392.6	1,655.9	4,048.6	9,072.1	0.0	24,248.4	689,775.2					
L5	15,318.3	5,101.7	2,535.2	1,400.9	7.6	3.0	24,366.7	16.7	5.4	22.1	41,277.2	815.0	210.5	199.1	409.5	527.4	0.0	1,751.9	67,417.8					
L6	30,301.1	6,841.6	2,308.7	980.8	25.0	10.1	40,467.3	99.6	53.8	153.5	68,551.6	575.4	271.4	268.7	540.1	393.3	0.0	1,508.8	110,681.1					
L7	18,137.2	4,102.9	2,007.4	1,021.2	10.8	4.4	25,283.9	28.9	8.1	37.0	42,830.9	564.9	170.0	193.1	363.1	310.5	0.0	1,238.5	69,390.3					
R1	1,381.7	178.3	88.9	19.0	4.5	1.8	1,674.1	104.2	71.7	175.8	2,836.0	31.2	8.8	13.9	22.8	18.2	0.0	72.1	4,758.1					
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-2	771.6	307.1	11.4	3.0	5.9	2.6	1,101.4	18.2	1.8	20.0	1,865.8	4.7	12.6	12.1	24.7	10.5	0.0	39.9	3,027.1					
R1-3	168.8	120.8	6.5	5.2	2.4	0.9	304.6	7.9	0.0	7.9	516.0	3.5	4.6	4.3	8.9	4.7	0.0	17.2	845.7					
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-5	342.9	112.9	6.4	3.8	1.2	0.5	467.7	10.1	1.5	11.6	792.3	2.1	4.6	5.3	9.9	7.1	0.0	19.1	1,290.6					
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R4	4,312.3	111.3	1.8	0.3	1.4	0.6	4,427.7	10.2	11.9	22.0	7,500.4	0.8	4.5	4.7	9.3	2.5	0.0	12.5	11,962.6					
R5	3,298.0	447.5	118.1	67.8	5.1	2.0	3,938.6	39.5	9.2	48.7	6,672.0	23.1	17.8	16.0	33.8	28.3	0.0	85.2	10,744.5					
R6	7,194.3	3,147.6	515.6	311.4	26.8	10.0	11,205.7	88.2	8.4	96.6	18,982.4	155.4	122.6	99.6	222.1	220.1	0.0	597.6	30,882.2					
R7	374.6	330.3	43.5	17.5	0.9	0.4	767.0	0.0	5.9	5.9	1,299.4	13.3	13.3	12.8	26.1	11.9	0.0	51.3	2,123.5					
R8	6,127.4	2,347.8	702.1	330.6	4.2	1.7	11,513.8	7.7	6.4	14.1	19,504.4	187.9	92.2	80.7	172.9	158.9	0.0	519.6	31,551.9					
HR2	112.0	10.2	2.3	1.5	0.1	0.0	126.2	3.1	0.0	3.1	213.8	1.0	0.6	1.1	1.8	0.7	0.0	3.4	346.5					
合計	245,284.7	77,678.0	39,788.0	15,890.9	148.2	57.6	378,847.4	606.8	240.2	847.0	641,767.4	13,618.5	3,373.4	2,621.9	5,995.2	10,892.6	0.0	30,506.3	1,051,968.1					

[illegible]

(百万円)

記号 ブランク	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家屋用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			家屋における応急対策費用							
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計					
L1	17.9	0.0	0.7	0.1	0.0	0.0	18.7	15.3	13.3	28.6	31.6	0.3	0.0	0.0	0.0	0.4	0.0	0.7	79.5	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.1	0.0	0.0	0.0	0.0	0.0	0.1	27.4	23.5	50.9	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	51.1
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	17.9	0.0	0.7	0.1	0.0	0.0	18.7	42.7	36.8	79.5	31.8	0.3	0.0	0.0	0.0	0.4	0.0	0.7	130.6	

《百万円》

元集ブロック	一般資産被害額							農作物被害額				公共土木施設等被害額	営業停止損失	家庭における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
	家屋	家庭用品	事業所資産			農漁家資産		小計	水稲	畑作物	小計			清掃労働対価	代替活動等	小計						
			償却	在庫		償却	在庫															
L1	48.7	0.0		2.1	0.4	0.1	0.0	51.2	39.9	26.7	66.6	86.8	0.7	0.0	0.0	0.0	0.0	0.9	0.0	1.6	206.2	
L1-1	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	5.6	0.0		0.2	0.0	0.0	0.0	5.8	58.5	45.2	103.7	9.9	0.1	0.0	0.0	0.0	0.1	0.0	0.2	119.6		
R1-1	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	54.3	0.0		2.2	0.4	0.1	0.0	57.0	98.4	71.9	170.4	96.6	0.8	0.0	0.0	0.0	1.0	0.0	1.8	325.8		

[illegible]

[illegible]

[illegible]

[illegible]

様式-3 被害額（事業実施後H56） 水系名：由良川 河川名：由良川 流量規模：1/10 （百万円）

[illegible]

様式-3 被害額（事業実施後H56） 水系名：由良川 河川名：由良川 流量規模：1/20 （百万円）

[illegible]

様式-3 被害額（事業実施後H56） 水系名：由良川 河川名：由良川 流量規模：1/50 （百万円）

記号 ブロッ ク	一般資産被害額						農作物被害額				公共土木施設等被害額	災害停止損失	家屋における 応急対策費用				事業所にお ける応急対 策費用	その他の開 投被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農産家資産		小計	水稲	畑作物	小計			家屋における 応急対策費用		小計						
			償却	在庫	償却	在庫							清掃活動対 価	代経活動等							
L1	526.1	14.1	21.9	7.4	1.2	0.5	571.2	82.1	46.0	128.1	967.6	6.3	0.7	1.1	1.8	10.6	0.0	18.6	1,685.6		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	1.4	0.1	0.1	0.1	0.0	0.0	1.6	0.0	0.1	0.1	2.7	0.1	0.0	0.0	0.0	0.1	0.0	0.2	4.5		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	405.8	2.2	22.4	5.1	0.8	0.4	436.7	99.5	71.4	170.8	739.7	6.0	0.1	0.2	0.3	3.1	0.0	9.4	1,356.5		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	1,000.7	263.7	115.6	36.2	0.6	0.3	1,417.1	2.6	1.6	4.1	2,400.6	39.1	12.8	22.6	35.3	18.0	0.0	92.4	3,914.1		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	1,934.0	280.1	160.0	48.8	2.6	1.1	2,426.6	184.1	119.1	303.2	4,110.5	51.4	13.5	23.9	37.4	31.7	0.0	120.5	6,960.7		

様式-3 被害額（事業実施後H56） 水系名：由良川 河川名：由良川 流量規模：1/100 （百万円）

近畿 ブロック	一般資産被害額								農作物被害額				公共土木施設等被害額	災害停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農産家資産		小計	水稻	畑作物	小計													
			償却	在庫	償却	在庫																	
L1	1,544.1	288.5	90.6	31.5	6.3	2.6	1,963.6	93.4	46.5	139.9	3,326.3	25.4	11.8	20.0	31.8	36.5	0.0	93.7	5,523.4				
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-2	204.9	83.7	12.2	0.5	1.3	0.5	303.1	2.8	1.9	4.7	513.5	5.0	3.3	3.2	6.5	4.0	0.0	15.5	836.8				
L1-3	939.7	144.2	45.0	23.7	2.0	0.8	1,155.5	22.8	1.5	24.4	1,957.4	25.0	5.7	4.8	10.4	18.2	0.0	53.6	3,190.8				
L1-4	1,768.4	633.7	155.6	107.9	5.9	2.3	2,673.7	19.6	1.0	20.6	4,529.3	53.9	25.2	20.9	46.1	66.4	0.0	166.4	7,389.9				
L1-5	444.0	149.4	13.5	4.6	1.8	0.8	614.0	8.7	0.4	9.1	1,040.1	5.8	6.0	6.4	12.4	10.9	0.0	29.1	1,692.3				
L1-6	338.7	61.0	14.0	19.6	1.1	0.4	434.8	16.9	3.0	20.0	736.5	7.2	2.6	2.6	5.2	2.7	0.0	15.1	1,206.3				
L1-7	401.3	44.5	8.5	5.8	0.1	0.1	460.4	22.1	1.1	23.2	779.9	2.3	2.1	2.3	4.4	2.9	0.0	9.6	1,273.1				
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	98,636.8	39,305.0	24,196.3	8,704.9	27.6	10.6	170,881.2	21.0	4.8	25.8	289,472.8	7,199.2	1,721.4	1,430.2	3,151.6	6,659.2	0.0	17,010.0	477,389.8				
L5	10,818.0	3,568.1	1,962.2	979.3	5.2	2.3	17,335.1	15.9	4.9	20.9	29,365.6	591.5	149.2	164.0	313.2	367.9	0.0	1,272.7	47,994.1				
L6	18,303.1	1,637.8	633.5	128.2	11.4	4.9	20,718.9	115.4	60.1	175.5	35,097.9	130.9	67.3	98.1	165.5	78.7	0.0	375.0	56,367.3				
L7	12,409.9	2,652.3	1,086.1	520.9	4.9	2.0	16,676.1	36.3	10.8	47.0	28,249.4	383.6	124.1	165.9	290.0	172.6	0.0	846.2	45,818.8				
R1	1,531.8	228.6	83.7	20.0	6.2	2.5	1,872.8	108.2	72.7	180.9	3,172.6	31.9	9.4	15.9	25.4	17.2	0.0	74.4	5,300.7				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	1,165.2	439.5	11.7	3.1	9.2	3.6	1,632.2	25.6	2.5	28.1	2,765.0	5.0	17.1	15.4	32.4	11.2	0.0	48.7	4,473.9				
R1-3	213.4	145.1	6.9	5.5	2.8	1.1	374.8	9.3	0.0	9.3	634.9	3.7	5.7	5.2	10.9	5.3	0.0	19.9	1,038.9				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	492.0	177.9	10.0	6.0	1.9	0.8	688.5	10.4	1.5	11.9	1,166.3	3.8	7.5	8.6	16.1	11.7	0.0	31.7	1,898.2				
R1-6	316.7	51.5	0.4	0.3	1.1	0.4	370.3	11.4	4.4	15.8	627.4	0.3	2.2	2.8	5.0	0.7	0.0	6.0	1,019.5				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	6,313.1	392.0	5.9	1.4	5.5	2.1	6,720.1	13.6	5.2	18.8	11,383.9	2.5	15.7	13.3	28.9	8.7	0.0	40.2	18,163.0				
R5	2,612.6	269.3	34.1	18.0	2.7	1.1	2,937.7	31.6	7.4	38.9	4,976.5	8.3	10.6	10.3	20.9	13.2	0.0	42.4	7,995.5				
R6	3,872.3	1,644.9	315.2	158.0	13.2	5.9	6,009.4	92.5	6.9	99.4	10,179.9	81.9	65.5	70.8	136.2	106.2	0.0	324.4	16,613.1				
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R8	5,306.0	1,532.0	544.1	228.2	2.7	1.2	7,614.2	7.3	6.5	13.9	12,898.5	132.9	62.1	65.4	127.4	104.6	0.0	365.0	20,891.5				
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	167,632.0	53,448.9	29,229.5	10,967.3	112.9	45.8	261,436.4	684.7	243.1	927.8	442,873.3	8,700.1	2,314.4	2,126.1	4,440.5	7,698.9	0.0	20,839.4	726,076.9				

様式-3		被害額（福知山市街地内水）（事業実施前H27）						水系名：由良川			河川名：由良川			流量規模：1/2			（百万円）			
地区ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
			事業所資産		農産家資産			水稻	畑作物	小計			清掃労働対価	代替活動等	小計					
			償却	在庫	償却	在庫														
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

様式-3		被害額（福知山市街地内水）（事業実施前H27）						水系名：由良川			河川名：由良川			流量規模：1/3			（百万円）			
地区ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			事業所資産		農産家資産			水稻	畑作物	小計			清掃労働対価	代替活動等						小計
			償却	在庫	償却	在庫														
L4	360.9	66.6	49.4	17.2	0.1	0.0	494.2	7.5	2.0	9.5	837.1	28.7	6.0	11.2	17.2	13.7	0.0	59.6	1,400.4	
合計	360.9	66.6	49.4	17.2	0.1	0.0	494.2	7.5	2.0	9.5	837.1	28.7	6.0	11.2	17.2	13.7	0.0	59.6	1,400.4	

様式-3		被害額（福知山市街地内水）（事業実施前H27）										水系名：由良川			河川名：由良川			流量規模：1/5			（百万円）		
地区ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農産家資産		小計	水稻	畑作物	小計	清掃労働対価		代替活動等			小計							
			償却	在庫	償却	在庫																	
L4	1,266.5	279.2	204.1	72.7	0.2	0.1	1,822.8	8.4	2.1	10.5	3,087.7	116.3	24.4	45.1	69.5	50.8	0.0	236.6	5,157.6				
合計	1,266.5	279.2	204.1	72.7	0.2	0.1	1,822.8	8.4	2.1	10.5	3,087.7	116.3	24.4	45.1	69.5	50.8	0.0	236.6	5,157.6				

様式-3		被害額（福知山市街地内水）（事業実施前H27）						水系名：由良川			河川名：由良川			流量規模：1/7			（百万円）						
地区ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農産家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等	小計										
			償却	在庫	償却	在庫																	
L4	2,365.9	540.7	405.3	142.5	0.4	0.2	3,455.0	8.7	2.1	10.8	5,852.6	226.1	47.7	88.2	135.9	99.9	0.0	461.9	9,780.3				
合計	2,365.9	540.7	405.3	142.5	0.4	0.2	3,455.0	8.7	2.1	10.8	5,852.6	226.1	47.7	88.2	135.9	99.9	0.0	461.9	9,780.3				

様式-3		被害額（福知山市街地内水）（事業実施前H27）						水系名：由良川			河川名：由良川			流量規模：1/10			（百万円）				
地区ブロック	一般資産被害額						農作物被害額			家屋における応急対策費用						事業所における応急対策費用		その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農産家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		清掃労働対価	代替活動等	小計				
			償却	在庫	償却	在庫							償却	在庫							
L4	3,930.9	961.7	700.9	240.7	0.7	0.3	5,835.2	9.0	2.1	11.1	9,884.7	370.0	77.1	141.1	218.2	166.7	0.0	754.9	16,485.9		
合計	3,930.9	961.7	700.9	240.7	0.7	0.3	5,835.2	9.0	2.1	11.1	9,884.7	370.0	77.1	141.1	218.2	166.7	0.0	754.9	16,485.9		

様式-3		被害額（福知山市街地内水）（事業実施前H27）						水系名：由良川			河川名：由良川			流量規模：1/20			（百万円）			
地区ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
			事業所資産		農産家資産			水稻	畑作物	小計			清掃労働対価	代替活動等	小計					
			償却	在庫	償却	在庫														
L4	7,368.9	2,080.2	1,377.0	458.1	2.0	0.8	11,287.0	9.3	2.1	11.4	19,120.2	661.0	135.8	243.6	379.4	308.1	0.0	1,348.5	31,767.1	
合計	7,368.9	2,080.2	1,377.0	458.1	2.0	0.8	11,287.0	9.3	2.1	11.4	19,120.2	661.0	135.8	243.6	379.4	308.1	0.0	1,348.5	31,767.1	

様式-3		被害額（福知山市街地内水）（事業実施前H27）						水系名：由良川			河川名：由良川			流量規模：1/30			（百万円）			
地区ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
			事業所資産		農産家資産			水稻	畑作物	小計			清掃労働対価	代替活動等	小計					
			償却	在庫	償却	在庫														
L4	9,600.4	2,902.2	1,871.2	617.3	2.9	1.1	14,995.1	9.6	2.1	11.7	25,401.8	858.6	174.9	307.9	482.8	411.8	0.0	1,753.2	42,161.8	
合計	9,600.4	2,902.2	1,871.2	617.3	2.9	1.1	14,995.1	9.6	2.1	11.7	25,401.8	858.6	174.9	307.9	482.8	411.8	0.0	1,753.2	42,161.8	

様式-3		被害額（福知山市街地内水）（現況H29）						水系名：由良川			河川名：由良川			流量規模：1/2			（百万円）			
応急 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用		事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等					
L4		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
合計		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

様式-3		被害額（福知山市街地内水）（現況H29）						水系名：由良川			河川名：由良川			流量規模：1/3			（百万円）			
応急 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用		事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等					
L4		108.2	6.9	6.8	2.6	0.0	0.0	124.5	7.2	1.9	9.1	211.0	3.6	0.6	1.1	1.7	2.6	0.0	7.9	352.5
合計		108.2	6.9	6.8	2.6	0.0	0.0	124.5	7.2	1.9	9.1	211.0	3.6	0.6	1.1	1.7	2.6	0.0	7.9	352.5

様式-3		被害額（福知山市街地内水）（現況H29）						水系名：由良川			河川名：由良川			流量規模：1/5			（百万円）			
応急 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用		事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等					
L4		498.7	85.4	64.1	22.9	0.1	0.0	671.2	8.0	2.0	10.0	1,137.0	35.9	7.6	14.0	21.6	18.1	0.0	75.6	1,893.8
合計		498.7	85.4	64.1	22.9	0.1	0.0	671.2	8.0	2.0	10.0	1,137.0	35.9	7.6	14.0	21.6	18.1	0.0	75.6	1,893.8

様式-3		被害額（福知山市街地内水）（現況H29）						水系名：由良川			河川名：由良川			流量規模：1/7			（百万円）			
応急 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用		事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等					
L4		1,325.4	259.2	213.3	75.6	0.2	0.1	1,873.8	8.4	2.1	10.5	3,174.1	124.9	25.7	47.7	73.4	55.0	0.0	253.3	5,311.7
合計		1,325.4	259.2	213.3	75.6	0.2	0.1	1,873.8	8.4	2.1	10.5	3,174.1	124.9	25.7	47.7	73.4	55.0	0.0	253.3	5,311.7

様式-3		被害額（福知山市街地内水）（現況H29）						水系名：由良川			河川名：由良川			流量規模：1/10			（百万円）			
応急 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用		事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等					
L4		2,527.2	516.3	439.9	152.7	0.4	0.2	3,636.7	8.8	2.1	10.9	6,160.5	251.9	51.1	95.5	146.6	109.9	0.0	508.4	10,316.5
合計		2,527.2	516.3	439.9	152.7	0.4	0.2	3,636.7	8.8	2.1	10.9	6,160.5	251.9	51.1	95.5	146.6	109.9	0.0	508.4	10,316.5

様式-3		被害額（福知山市街地内水）（現況H29）						水系名：由良川			河川名：由良川			流量規模：1/20			（百万円）			
応急 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用		事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等					
L4		5,765.0	1,477.4	1,054.9	350.5	1.4	0.6	8,649.8	9.1	2.1	11.2	14,652.7	531.8	107.1	195.8	302.9	241.3	0.0	1,076.0	24,389.7
合計		5,765.0	1,477.4	1,054.9	350.5	1.4	0.6	8,649.8	9.1	2.1	11.2	14,652.7	531.8	107.1	195.8	302.9	241.3	0.0	1,076.0	24,389.7

様式-3		被害額（福知山市街地内水）（現況H29）						水系名：由良川			河川名：由良川			流量規模：1/30			（百万円）			
応急 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用		事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等					
L4		7,956.4	2,221.1	1,497.6	492.1	2.3	0.9	12,170.4	9.4	2.1	11.5	20,616.6	713.2	143.8	259.3	403.1	333.8	0.0	1,450.1	34,248.6
合計		7,956.4	2,221.1	1,497.6	492.1	2.3	0.9	12,170.4	9.4	2.1	11.5	20,616.6	713.2	143.8	259.3	403.1	333.8	0.0	1,450.1	34,248.6

様式-3		被害額（福知山市街地内水）（事業実施後H32）						水系名：由良川				河川名：由良川				流量規模：1/2				（百万円）	
地区 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計					
L4		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

様式-3		被害額（福知山市街地内水）（事業実施後H32）						水系名：由良川				河川名：由良川				流量規模：1/3				（百万円）	
地区 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計					
L4		14.7	0.2	0.5	0.3	0.0	0.0	15.7	6.0	1.3	7.3	26.5	0.3	0.0	0.0	0.0	0.3	0.0	0.6	50.1	
合計		14.7	0.2	0.5	0.3	0.0	0.0	15.7	6.0	1.3	7.3	26.5	0.3	0.0	0.0	0.0	0.3	0.0	0.6	50.1	

様式-3		被害額（福知山市街地内水）（事業実施後H32）						水系名：由良川				河川名：由良川				流量規模：1/5				（百万円）	
地区 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計					
L4		74.7	2.2	2.8	1.4	0.0	0.0	81.1	7.1	1.8	8.9	137.4	1.3	0.2	0.3	0.5	1.3	0.0	3.1	230.5	
合計		74.7	2.2	2.8	1.4	0.0	0.0	81.1	7.1	1.8	8.9	137.4	1.3	0.2	0.3	0.5	1.3	0.0	3.1	230.5	

様式-3		被害額（福知山市街地内水）（事業実施後H32）						水系名：由良川				河川名：由良川				流量規模：1/7				（百万円）	
地区 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計					
L4		132.5	8.0	6.4	3.1	0.0	0.0	150.0	7.5	2.0	9.5	254.1	2.7	0.4	0.8	1.2	2.9	0.0	6.8	420.4	
合計		132.5	8.0	6.4	3.1	0.0	0.0	150.0	7.5	2.0	9.5	254.1	2.7	0.4	0.8	1.2	2.9	0.0	6.8	420.4	

様式-3		被害額（福知山市街地内水）（事業実施後H32）						水系名：由良川				河川名：由良川				流量規模：1/10				（百万円）	
地区 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計					
L4		302.5	28.2	24.1	10.4	0.1	0.0	365.3	8.0	2.0	10.0	618.7	12.2	2.5	4.5	7.0	8.5	0.0	27.7	1,021.7	
合計		302.5	28.2	24.1	10.4	0.1	0.0	365.3	8.0	2.0	10.0	618.7	12.2	2.5	4.5	7.0	8.5	0.0	27.7	1,021.7	

様式-3		被害額（福知山市街地内水）（事業実施後H32）						水系名：由良川				河川名：由良川				流量規模：1/20				（百万円）	
地区 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計					
L4		1,602.4	235.7	264.0	91.9	0.2	0.1	2,194.3	8.7	2.1	10.8	3,717.0	155.0	29.8	56.3	86.1	70.4	0.0	311.5	6,233.6	
合計		1,602.4	235.7	264.0	91.9	0.2	0.1	2,194.3	8.7	2.1	10.8	3,717.0	155.0	29.8	56.3	86.1	70.4	0.0	311.5	6,233.6	

様式-3		被害額（福知山市街地内水）（事業実施後H32）						水系名：由良川				河川名：由良川				流量規模：1/30				（百万円）	
地区 ブロック		家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
				償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計					
L4		2,978.1	552.2	532.2	176.6	0.5	0.2	4,239.8	8.8	2.1	10.9	7,182.2	291.8	54.9	103.1	158.0	131.3	0.0	581.1	12,014.0	
合計		2,978.1	552.2	532.2	176.6	0.5	0.2	4,239.8	8.8	2.1	10.9	7,182.2	291.8	54.9	103.1	158.0	131.3	0.0	581.1	12,014.0	

形式-3	被害額（事業実施前H15） 資産+10%								水系名：由良川				河川名：由良川				流量規模：1/2				(百万円)					
汎用 ブロック	一般資産被害額								農作物被害額				家屋における 応急対策費用									事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水箱	畑作物	小計	公共土木施設等被害額	富害停止損失	家屋における 応急対策費用													
			償却	在庫	償却	在庫							清掃労働対 価	代弁活動等	小計											
L1	2.3	0.0	0.0	0.0	0.0	0.0	2.3	5.8	3.9	9.7	4.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	16.1					
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2						
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3						
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L6	2.5	0.2	0.0	0.0	0.0	0.0	2.7	0.0	0.8	0.8	4.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	8.2						
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.0	11.3	14.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.3						
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0						
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0					
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
合計	4.8	0.2	0.1	0.0	0.0	0.0	5.1	9.1	16.7	25.9	8.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	39.7						

(百万円)

知恵 ブロック	一般資産被害額							農作物被害額				公共土木施設等被害額	営業停止損失	家庭における 応急対策費用			事業所における 応急対策費用	その他の関係被害	小計	合計	備考
	家屋	家畜用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	家庭における 応急対策費用										
			償却	在庫	償却	在庫					清掃労働対価			代替活動等	小計						
L1	19.9	0.1	0.8	0.1	0.0	0.0	20.9	15.0	14.1	29.1	35.4	0.3	0.0	0.0	0.0	0.0	0.4	0.0	0.7	86.1	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	2.3	0.2	0.5	0.2	0.0	0.0	3.1	1.5	0.0	1.5	5.3	0.2	0.0	0.1	0.1	0.2	0.0	0.5	10.4		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.5	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.7	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.7	2.9	3.6	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.7	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	24.1	0.9	1.0	0.5	0.0	0.0	26.4	1.7	10.7	12.4	44.8	0.4	0.1	0.2	0.2	0.2	0.0	0.8	84.4		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	1.4	0.0	0.0	0.0	0.0	0.0	1.4	34.6	26.9	61.5	2.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	65.2		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.8	0.5	6.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.3		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	1.0	1.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.6		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	64.0	0.0	0.0	0.0	0.0	0.0	64.0	0.0	0.6	0.6	106.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	172.9		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	111.6	1.1	2.2	0.9	0.0	0.0	115.8	60.2	57.3	117.5	196.2	1.0	0.1	0.2	0.3	0.8	0.0	2.1	431.6		

(百万円)

地区 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の関係被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			家屋における 応急対策費用								
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
L1	64.8	6.1	3.3	1.0	0.1	0.1	75.4	40.7	27.4	68.0	127.6	1.1	0.2	0.3	0.5	1.6	0.0	3.1	274.1		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.8	0.0	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.8		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2		
L1-4	18.2	1.5	1.3	0.6	0.1	0.0	21.7	5.7	0.4	6.1	36.8	0.5	0.1	0.1	0.2	0.4	0.0	1.1	65.7		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.8	0.3	1.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.2	1.4	6.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.7		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	0.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4		
L1-8	3.4	0.0	0.4	0.1	0.0	0.0	4.0	2.9	3.7	6.6	6.8	0.1	0.0	0.0	0.0	0.2	0.0	0.3	17.7		
L2	4.4	0.1	0.0	0.0	0.0	0.0	4.6	12.6	0.0	12.6	7.7	0.0	0.0	0.0	0.0	0.1	0.0	0.1	25.1		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	708.3	15.5	2.8	1.5	0.0	0.0	728.1	19.0	24.9	43.8	1,233.5	0.7	0.6	0.8	1.4	0.6	0.0	2.7	2,008.2		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	4.9	0.0	0.1	0.0	0.0	0.0	5.0	58.5	42.4	100.9	8.5	0.1	0.0	0.0	0.0	0.1	0.0	0.1	114.6		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.9	0.0	1.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.9		
R1-2	4.5	0.2	0.0	0.0	0.0	0.0	4.7	8.4	0.5	8.9	8.0	0.0	0.0	0.1	0.1	0.0	0.0	0.1	21.6		
R1-3	1.9	0.1	0.5	0.3	0.0	0.0	2.8	7.0	0.0	7.0	4.8	0.4	0.0	0.0	0.1	0.1	0.0	0.5	15.1		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.2	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5		
R1-6	0.1	0.0	0.0	0.0	0.0	0.0	0.1	3.9	2.1	6.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.2		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	641.5	7.3	0.1	0.0	0.1	0.0	649.1	7.7	7.7	15.3	1,099.6	0.1	0.3	0.5	0.8	0.1	0.0	1.0	1,765.1		
R5	44.2	2.1	0.2	0.1	0.0	0.0	46.6	12.4	3.8	16.1	78.9	0.1	0.1	0.1	0.2	0.1	0.0	0.3	142.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	1,496.3	33.0	8.9	3.6	0.3	0.1	1,542.1	187.9	115.1	303.0	2,612.4	2.9	1.3	1.9	3.2	3.2	0.0	9.3	4,466.8		

様式-3		被害額（事業実施前H15）					資産+10%		水系名：由良川				河川名：由良川				流量規模：1/10				(百万円)	
位置 ブロッ ク	一般資産被害額								農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対 価	代替活動等			小計							
			償却	在庫	償却	在庫																
L1	114.2	10.1	6.6	2.1	0.2	0.1	133.4	49.1	36.3	85.4	225.9	1.8	0.4	0.4	0.8	3.3	0.0	5.9	450.6			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	3.6	0.5	0.1	0.0	0.0	0.0	4.2	0.9	0.7	1.6	7.0	0.1	0.1	0.1	0.2	0.1	0.0	0.3	13.1			
L1-3	10.3	0.8	0.8	0.3	0.0	0.0	12.2	10.6	0.5	11.1	20.7	0.5	0.0	0.1	0.1	0.2	0.0	0.8	44.9			
L1-4	80.0	17.9	10.4	5.0	0.2	0.1	113.6	9.8	0.5	10.2	192.5	3.3	0.8	1.3	2.2	3.0	0.0	8.4	324.8			
L1-5	2.7	0.1	0.2	0.0	0.0	0.0	3.0	1.9	0.3	2.2	5.1	0.1	0.0	0.0	0.1	0.1	0.0	0.3	10.7			
L1-6	7.3	0.8	0.0	0.0	0.0	0.0	8.1	8.4	1.9	10.3	13.7	0.0	0.0	0.1	0.1	0.0	0.0	0.1	32.2			
L1-7	8.3	0.4	0.1	0.0	0.0	0.0	8.8	2.9	0.4	3.3	15.0	0.0	0.0	0.1	0.1	0.0	0.0	0.2	27.3			
L1-8	362.6	0.4	2.5	0.9	0.0	0.0	366.5	12.4	11.9	24.3	620.8	0.9	0.1	0.1	0.2	0.7	0.0	1.8	1,013.4			
L2	140.4	18.1	0.5	0.4	0.0	0.0	159.3	14.8	0.0	14.8	269.8	0.2	0.7	1.0	1.7	0.4	0.0	2.3	446.2			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	30.7	4.3	4.6	1.4	0.0	0.0	41.0	0.0	0.0	0.0	69.4	2.7	0.7	1.3	2.0	1.4	0.0	6.1	116.4			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	2,321.2	56.3	20.4	11.1	0.2	0.1	2,409.3	42.6	46.2	88.9	4,081.4	6.9	3.8	6.3	10.1	2.6	0.0	19.6	6,599.2			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	49.0	2.3	2.5	0.7	0.1	0.0	54.6	86.3	61.1	147.3	92.5	0.8	0.2	0.3	0.5	0.5	0.0	1.8	296.2			
R1-1	20.4	8.0	0.1	0.0	0.0	0.0	28.5	10.0	2.2	12.1	48.3	0.0	0.3	0.5	0.7	0.1	0.0	0.8	89.7			
R1-2	23.1	2.1	0.0	0.0	0.1	0.0	25.3	11.7	0.9	12.6	42.9	0.0	0.1	0.2	0.3	0.0	0.0	0.3	81.2			
R1-3	5.5	1.0	1.3	0.6	0.0	0.0	8.3	7.4	0.0	7.4	14.1	0.5	0.0	0.1	0.1	0.3	0.0	0.9	30.8			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	2.2	0.8	0.1	0.0	0.0	0.0	3.1	1.3	0.3	1.6	5.3	0.0	0.0	0.1	0.1	0.1	0.0	0.2	10.2			
R1-6	3.0	0.1	0.0	0.0	0.0	0.0	3.2	4.6	2.6	7.2	5.3	0.0	0.0	0.0	0.1	0.0	0.0	0.1	15.7			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	1,234.0	18.4	0.3	0.0	0.2	0.1	1,253.1	9.1	10.1	19.2	2,122.7	0.1	0.7	0.9	1.6	0.4	0.0	2.1	3,397.2			
R5	344.8	10.9	1.5	0.7	0.1	0.0	358.0	26.3	6.6	32.9	606.4	0.4	0.5	0.9	1.4	0.4	0.0	2.2	999.5			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	4,763.3	153.4	51.7	23.4	1.2	0.5	4,993.5	310.1	182.4	492.5	8,459.1	18.3	8.4	13.8	22.2	13.5	0.0	54.0	13,999.2			

様式-3		被害額（事業実施前H15） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)					
位置 ブロッ ク	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清障労働対 価	代替活動等	小計												
			償却	在庫	償却	在庫																			
L1	229.8	14.9	12.4	3.6	0.3	0.1	261.2	65.6	44.3	109.9	442.4	3.3	0.8	1.1	1.9	6.0	0.0	11.2	824.6						
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L1-2	28.5	9.8	0.9	0.0	0.2	0.1	39.5	1.8	1.4	3.2	66.9	0.5	0.4	0.7	1.1	0.3	0.0	2.0	111.6						
L1-3	142.1	10.6	9.9	3.0	0.2	0.1	165.8	17.4	0.8	18.2	280.9	5.1	0.6	0.9	1.5	2.4	0.0	9.0	473.9						
L1-4	215.1	73.3	30.4	15.7	0.6	0.3	335.5	11.7	0.6	12.3	588.3	8.2	2.7	3.5	6.3	8.9	0.0	23.3	939.3						
L1-5	8.8	1.9	0.7	0.2	0.0	0.0	11.5	2.7	0.3	3.0	19.6	0.3	0.1	0.1	0.2	0.3	0.0	0.7	34.9						
L1-6	24.7	3.0	0.0	0.0	0.1	0.0	27.8	9.5	1.9	11.4	47.1	0.0	0.2	0.2	0.3	0.0	0.0	0.4	86.6						
L1-7	39.7	4.1	0.4	0.3	0.0	0.0	44.6	19.3	0.4	19.7	75.5	0.1	0.2	0.2	0.4	0.2	0.0	0.7	140.6						
L1-8	534.4	4.7	7.5	3.3	0.0	0.0	549.9	13.1	12.1	25.2	931.6	2.1	0.2	0.3	0.5	2.5	0.0	5.2	1,511.9						
L2	233.2	41.5	2.1	1.9	0.2	0.1	279.0	15.0	0.0	15.0	472.6	1.2	1.6	2.3	3.9	0.9	0.0	6.0	772.7						
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L4	28,896.5	10,936.9	7,253.1	2,220.8	9.0	4.0	49,320.2	21.5	5.2	26.8	83,548.5	2,238.7	451.9	664.9	1,116.8	1,419.1	0.0	4,774.5	137,670.0						
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L6	8,123.1	615.0	459.2	77.4	3.8	1.5	9,279.9	89.0	58.8	147.8	15,720.2	93.6	28.2	49.3	77.5	45.2	0.0	216.3	25,364.2						
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1	181.3	24.7	25.8	4.6	0.6	0.3	237.3	96.4	70.1	166.4	402.1	7.6	1.0	1.7	2.7	2.5	0.0	12.8	818.6						
R1-1	35.5	15.5	0.4	0.1	0.0	0.0	51.6	12.0	2.6	14.6	87.5	0.2	0.5	0.7	1.2	0.3	0.0	1.7	155.4						
R1-2	87.4	17.2	0.1	0.0	0.4	0.2	105.3	13.3	1.9	15.2	178.4	0.1	0.7	0.9	1.6	0.1	0.0	1.7	300.6						
R1-3	23.6	8.4	4.4	2.7	0.2	0.1	39.3	7.9	0.0	7.9	66.6	1.3	0.4	0.7	1.2	1.2	0.0	3.6	117.5						
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-5	4.8	2.4	0.2	0.1	0.0	0.0	7.6	3.4	0.3	3.8	12.8	0.1	0.1	0.1	0.2	0.2	0.0	0.5	24.6						
R1-6	10.9	1.0	0.0	0.0	0.0	0.0	12.0	5.2	2.9	8.2	20.3	0.0	0.0	0.0	0.1	0.1	0.0	0.0	0.1	40.6					
R2	1.7	0.5	0.0	0.0	0.0	0.0	2.3	0.0	0.0	0.0	3.8	0.0	0.0	0.0	0.0	0.1	0.0	0.1	6.1						
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R4	2,348.5	42.2	0.8	0.1	0.5	0.2	2,392.3	10.5	12.0	22.5	4,052.6	0.3	1.8	2.2	3.9	0.9	0.0	5.2	6,472.6						
R5	644.6	40.6	8.8	3.5	0.5	0.2	698.2	28.2	7.2	35.4	1,182.8	2.1	1.6	2.4	4.0	1.5	0.0	7.6	1,924.0						
R6	79.5	81.3	2.7	1.5	0.5	0.2	165.7	0.0	0.0	0.0	280.8	0.6	3.0	4.4	7.4	1.1	0.0	9.1	455.7						
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
合計	41,893.7	11,949.5	7,820.0	2,339.0	17.1	7.4	64,026.6	443.6	222.8	666.4	108,461.1	2,365.3	496.0	736.7	1,232.7	1,493.6	0.0	5,091.7	178,245.8						

様式－３		被害額（事業実施前H15）					資産+10%		水系名：由良川					河川名：由良川					流量規模：1/50					(百万円)	
氾濫 ブロッ ク	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等	小計												
			償却	在庫	償却	在庫																			
L1	648.1	100.5	39.4	11.4	1.7	0.7	801.9	83.1	49.4	132.5	1,358.5	10.7	4.1	6.2	10.3	14.8	0.0	35.8	2,328.7						
L1-1	5.1	1.2	0.5	0.3	0.0	0.0	7.1	0.0	0.0	0.0	12.0	0.2	0.2	0.3	0.5	0.1	0.0	0.8	19.9						
L1-2	71.0	27.0	3.5	0.1	0.5	0.2	102.3	2.2	1.7	3.9	173.2	1.4	1.0	1.3	2.3	1.0	0.0	4.7	284.1						
L1-3	319.1	46.6	24.9	10.0	0.7	0.3	401.6	18.9	1.0	19.9	680.3	9.3	1.7	2.1	3.8	6.3	0.0	19.4	1,121.2						
L1-4	625.8	187.3	69.7	41.4	1.8	0.8	926.8	13.2	0.7	13.9	1,570.0	18.2	6.8	7.6	14.4	23.0	0.0	55.6	2,566.3						
L1-5	71.6	23.7	4.6	1.1	0.3	0.1	101.4	4.1	0.3	4.4	171.7	1.6	0.9	1.4	2.3	2.3	0.0	6.2	283.7						
L1-6	109.9	17.2	4.1	4.2	0.4	0.2	136.0	10.3	2.0	12.2	230.5	1.9	0.6	0.9	1.6	0.5	0.0	3.9	382.7						
L1-7	118.0	13.5	2.1	1.3	0.1	0.0	134.9	21.0	0.4	21.4	228.6	0.5	0.5	0.7	1.2	0.7	0.0	2.5	387.4						
L1-8	1,250.0	58.7	39.9	18.0	0.3	0.1	1,367.0	13.6	12.5	26.1	2,315.6	12.7	2.3	3.6	5.9	10.9	0.0	29.5	3,738.2						
L2	509.4	108.8	8.1	7.6	0.8	0.4	635.0	20.4	0.0	20.4	1,075.7	3.5	4.1	4.7	8.8	3.1	0.0	15.4	1,746.6						
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L4	101,398.6	40,492.2	25,307.5	9,076.1	28.7	11.2	176,314.3	23.9	5.4	29.3	298,676.5	6,749.3	1,620.7	1,386.2	3,006.9	6,169.9	0.0	15,926.2	490,946.3						
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L6	22,101.7	4,623.0	1,916.6	744.6	14.9	6.2	29,407.0	102.4	66.2	168.6	49,815.4	407.7	176.6	200.3	376.8	252.1	0.0	1,036.7	80,427.6						
L7	16,318.8	3,317.9	1,517.5	760.1	9.3	3.7	21,927.3	31.5	9.2	40.8	37,144.8	424.3	128.7	154.3	283.1	230.0	0.0	937.4	60,050.2						
R1	651.7	106.1	86.7	19.0	2.5	1.1	867.1	104.8	75.0	179.8	1,468.9	21.2	4.3	5.2	9.4	10.2	0.0	40.8	2,556.5						
R1-1	140.9	41.6	2.1	0.7	0.1	0.0	185.6	12.1	3.9	16.1	314.4	0.6	1.7	2.3	4.1	1.4	0.0	6.1	522.1						
R1-2	294.4	74.4	2.6	0.5	2.1	0.9	375.0	14.9	1.9	16.8	635.2	1.6	3.2	4.9	8.2	1.8	0.0	11.5	1,038.5						
R1-3	73.6	45.7	6.0	4.4	0.9	0.4	131.0	8.3	0.0	8.3	222.0	2.3	1.6	2.1	3.8	2.7	0.0	8.7	370.1						
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-5	106.1	32.2	2.4	1.3	0.3	0.1	142.3	9.4	1.2	10.7	241.1	0.7	1.2	1.7	2.9	2.2	0.0	5.8	399.9						
R1-6	81.7	10.3	0.1	0.0	0.3	0.1	92.6	7.4	3.2	10.6	156.6	0.0	0.4	0.6	1.0	0.1	0.0	1.1	261.1						
R2	5.4	1.5	0.0	0.0	0.0	0.0	7.0	0.0	0.0	0.0	11.9	0.0	0.1	0.1	0.1	0.0	0.0	0.1	19.0						
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R4	3,551.0	79.8	1.3	0.2	1.1	0.4	3,633.9	10.8	13.0	23.8	6,155.8	0.5	2.9	3.3	6.2	1.5	0.0	8.2	9,821.8						
R5	1,252.7	130.2	34.3	15.4	1.7	0.7	1,434.9	29.5	7.4	36.9	2,430.7	6.8	4.9	6.0	10.9	6.9	0.0	24.6	3,927.2						
R6	5,014.9	2,296.2	435.3	238.5	18.6	7.7	8,011.2	76.0	4.2	80.2	13,571.0	105.4	83.9	78.4	162.3	143.9	0.0	411.6	22,073.9						
R7	241.6	214.2	26.0	9.2	0.6	0.2	491.8	0.0	6.2	6.2	833.1	7.8	7.9	8.9	16.8	6.4	0.0	31.0	1,362.1						
R8	4,188.2	1,311.2	508.3	201.9	2.3	1.1	6,213.0	7.4	6.7	14.2	10,524.8	108.5	49.3	55.1	104.4	81.7	0.0	294.6	17,046.5						
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	0.0	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4						
合計	159,149.3	53,361.0	30,043.6	11,167.4	90.0	36.6	253,847.9	626.8	271.7	898.5	430,018.4	7,896.7	2,109.6	1,938.4	4,048.0	6,973.5	0.0	18,918.2	703,683.0						

様式－３		被害額（事業実施前H15）				資産+10%		水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)						
氾濫 ブロッ ク	一般資産被害額												農作物被害額				公共土木 施設等被害額	営業停止損 失	家屋における 応急対策費用			事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価	代替活動等	小計													
			償却	在庫	償却	在庫																				
L1	2,021.8	515.5	143.4	51.2	7.3	3.0	2,742.1	97.6	50.6	148.2	4,645.1	37.4	20.0	27.3	47.4	49.3	0.0	134.1	7,669.5							
L1-1	25.4	3.9	1.7	0.9	0.0	0.0	31.9	2.5	0.0	2.5	54.0	0.8	0.5	1.0	1.6	0.4	0.0	2.8	91.2							
L1-2	173.1	68.8	8.7	0.3	1.1	0.5	252.6	2.6	1.8	4.4	428.0	3.0	2.5	2.8	5.3	2.7	0.0	11.0	696.0							
L1-3	629.0	100.5	39.0	18.4	1.6	0.7	789.2	20.1	1.0	21.1	1,336.9	16.1	3.6	3.8	7.3	12.0	0.0	35.4	2,182.6							
L1-4	1,222.5	408.5	116.6	79.1	3.8	1.5	1,832.1	13.7	0.8	14.5	3,103.6	35.9	15.2	14.2	29.4	45.3	0.0	110.6	5,060.7							
L1-5	443.5	153.1	13.6	4.7	1.8	0.8	617.4	4.9	0.3	5.2	1,045.9	5.3	5.6	6.0	11.5	10.0	0.0	26.8	1,695.3							
L1-6	309.5	56.3	12.8	17.1	1.1	0.4	397.0	10.4	2.0	12.4	672.6	5.6	2.1	2.3	4.4	2.1	0.0	12.1	1,094.2							
L1-7	441.5	49.0	9.4	6.4	0.2	0.1	506.4	22.3	1.0	23.4	857.9	2.3	2.1	2.3	4.4	2.9	0.0	9.6	1,397.3							
L1-8	3,834.8	475.8	195.4	96.0	1.5	0.7	4,604.2	14.7	12.9	27.6	7,799.6	55.5	17.8	22.2	40.0	63.1	0.0	158.6	12,590.0							
L2	964.5	252.2	25.6	23.4	2.4	1.0	1,269.1	21.7	0.0	21.7	2,149.8	10.0	9.3	9.5	18.8	9.9	0.0	38.6	3,479.2							
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
L4	182,486.8	62,167.4	36,428.1	13,470.4	45.2	16.3	294,614.1	24.4	5.5	29.9	499,076.4	12,436.2	2,577.7	1,773.5	4,351.2	9,451.1	0.0	26,238.5	819,958.9							
L5	25,735.3	8,824.5	3,853.1	2,410.9	12.5	4.6	40,840.9	14.7	5.0	19.7	69,184.6	1,242.2	324.4	254.0	578.3	723.9	0.0	2,544.5	112,589.7							
L6	42,286.2	8,552.7	2,723.1	1,136.9	32.2	13.5	54,744.7	116.7	70.1	186.9	92,737.5	587.6	306.8	303.9	610.6	404.1	0.0	1,602.3	149,271.4							
L7	20,719.0	4,775.3	2,363.7	1,197.1	12.3	5.1	29,072.5	32.3	9.0	41.3	49,248.9	600.6	179.8	203.3	383.1	330.4	0.0	1,314.1	79,676.9							
R1	1,965.4	403.6	155.2	41.1	8.6	3.3	2,577.3	113.5	77.6	191.1	4,365.9	47.6	15.3	17.9	33.2	28.9	0.0	109.6	7,244.0							
R1-1	280.4	99.9	5.7	2.2	0.2	0.1	388.6	12.5	4.5	17.0	658.3	1.4	3.3	4.1	7.4	3.3	0.0	12.1	1,076.0							
R1-2	643.7	233.7	7.2	1.5	4.9	2.2	893.3	15.5	2.0	17.5	1,513.2	2.8	8.4	9.5	17.9	5.0	0.0	25.7	2,449.5							
R1-3	159.4	108.5	7.1	5.5	2.0	0.9	283.5	8.6	0.0	8.6	480.2	3.4	4.0	4.1	8.0	4.1	0.0	15.5	787.8							
R1-4	14.3	17.1	0.2	0.1	0.3	0.1	32.1	2.4	0.0	2.4	54.4	0.1	0.7	0.9	1.5	0.4	0.0	2.0	90.8							
R1-5	495.7	172.6	10.9	6.5	1.6	0.7	688.1	10.4	1.3	11.7	1,165.6	3.8	6.9	7.7	14.6	11.4	0.0	29.8	1,895.1							
R1-6	301.8	50.2	0.5	0.4	1.0	0.4	354.3	9.1	3.4	12.5	600.2	0.3	2.0	2.7	4.7	0.7	0.0	5.7	972.7							
R2	87.0	10.9	0.0	0.0	0.3	0.1	98.3	0.1	0.0	0.1	186.4	0.0	0.5	0.9	1.4	0.0	0.0	1.4	266.2							
R3	4,582.7	2,027.5	167.6	88.9	14.5	5.5	6,886.7	43.5	21.6	65.1	11,666.0	52.1	74.7	65.7	140.3	76.9	0.0	269.4	18,887.1							
R4	5,049.5	147.9	2.6	0.4	1.9	0.8	5,203.1	11.2	13.1	24.3	8,814.1	0.9	5.5	5.7	11.2	2.9	0.0	15.0	14,056.4							
R5	2,261.3	287.3	109.9	59.6	3.8	1.6	2,723.6	31.6	6.1	7.7	39.3	4,613.7	17.3	10.5	10.1	20.6	18.4	0.0	56.3	7,432.8						
R6	7,950.5	3,470.3	568.0	343.5	29.5	11.1	12,372.9	98.2	9.4	107.5	20,959.7	156.2	122.9	99.9	222.8	220.3	0.0	599.2	34,039.3							
R7	492.6	437.4	53.4	22.1	1.2	0.5	1,007.1	0.0	6.5	6.5	1,706.0	15.5	15.7	14.3	30.0	13.8	0.0	59.3	2,778.9							
R8	9,751.0	2,921.6	818.4	400.1	5.3	2.1	13,988.5	8.5	7.1	15.6	23,544.1	206.1	102.3	84.6	186.9	178.1	0.0	571.1	38,029.3							
RH2	144.4	14.3	3.0	2.0	0.1	0.0	163.8	3.4	0.0	3.4	277.4	1.1	0.7	1.3	2.0	0.8	0.0	3.9	448.5							
合計	315,472.6	96,806.4	47,843.8	19,486.9	198.4	77.4	479,885.4	767.1	314.2	1,081.3	812,925.9	15,546.9	3,840.7	2,955.1	6,795.8	11,672.2	0.0	34,014.9	1,327,907.5							

形式－3	被害額（現況H29） 資産＋10%						水害名：由良川				河川名：由良川				流量規模：1/2				(百万円)				
加配 ブロック	一般資産被害額										農作物被害額				家屋における 応急対策費用								
	家屋	家具用品	事業所資産		農漁家資産		小計	水箱	畑作物	小計	公共土木施設 等被害額	富集停止損 失	清掃労働対 価	代経活動等	小計	事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考			
			償却	在庫	償却	在庫																	
L1	1.0	0.0	0.0	0.0	0.0	0.0	1.0	5.2	3.1	8.3	1.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	11.1			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.0	9.5	11.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	11.5			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3			
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	1.0	0.0	0.0	0.0	0.0	0.0	1.0	7.4	13.0	20.4	1.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	23.1			

[illegible]

形式－3		被害額（現況H29） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/20				(百万円)		
河川 ブロック	家屋	家庭用品	一般資産被害額				小計	水稲	農作物被害額		小計	公共土木土 設等被害額	営業停止損 失	家屋における 応急対策費用				事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考
			償却	在庫	償却	在庫			農作物被害額	農作物被害額				償却	在庫	償却	在庫					
L1	238.7	1.7	9.1	2.2	0.3	0.1	252.0	72.0	46.8	118.8	426.9	2.4	0.2	0.4	0.5	4.3	0.0	7.2	805.0			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	24.7	3.0	0.0	0.0	0.1	0.0	27.8	9.5	1.9	11.4	47.1	0.0	0.2	0.2	0.3	0.0	0.0	0.4	86.7			
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	26,245.4	9,707.1	6,469.1	1,939.4	8.2	3.6	44,372.8	21.7	5.1	26.9	75,167.5	2,074.8	404.0	622.9	1,026.9	1,265.0	0.0	4,366.7	123,933.9			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	10,247.0	1,118.9	608.7	106.6	9.5	4.0	12,094.7	90.3	51.4	141.6	20,488.5	119.0	43.5	70.9	114.4	69.1	0.0	302.5	33,027.4			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	114.8	1.8	5.6	0.9	0.3	0.1	123.6	98.6	71.2	169.8	209.4	1.7	0.1	0.2	0.3	0.8	0.0	2.7	505.5			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	77.2	12.6	0.0	0.0	0.4	0.2	90.4	9.6	1.9	11.6	153.1	0.0	0.6	1.0	1.6	0.0	0.0	1.6	256.6			
R1-3	26.8	8.7	4.4	2.7	0.2	0.1	42.9	8.1	0.0	8.1	72.6	1.3	0.5	0.8	1.3	0.0	3.8		127.4			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	1,946.3	38.9	0.7	0.1	0.4	0.2	1,986.6	10.1	11.5	21.7	3,365.4	0.3	1.6	2.0	3.6	0.8	0.0	4.7	5,378.4			
R5	2,480.2	238.5	27.6	14.6	2.2	0.9	2,764.0	34.6	8.1	42.7	4,682.3	6.9	8.7	8.9	17.6	10.8	0.0	35.3	7,524.3			
R6	2,008.6	849.9	166.9	82.2	8.2	3.6	3,119.3	54.8	0.9	55.7	5,294.0	45.2	31.5	43.2	74.7	48.2	0.0	168.0	8,627.1			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	43,409.6	11,981.3	7,292.2	2,148.7	29.7	12.7	64,874.1	400.4	198.8	608.2	109,896.8	2,251.6	490.8	750.4	1,241.2	1,400.2	0.0	4,892.9	180,272.1			

[illegible]

[illegible]

様式-3		被害額（当面整備H34） 資産+10%						水系名：由良川				河川名：由良川				流量規模：1/3				(百万円)	
地区 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対 価	代替活動等	小計						
			償却	在庫	償却	在庫															
L1	19.6	0.0	0.7	0.1	0.0	0.0	20.5	16.8	14.6	31.4	34.8	0.3	0.0	0.0	0.0	0.4	0.0	0.7	87.4		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	0.1	0.0	0.0	0.0	0.0	0.0	0.1	30.2	25.8	56.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	56.2		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	19.7	0.0	0.7	0.1	0.0	0.0	20.6	47.0	40.4	87.4	34.9	0.3	0.0	0.0	0.0	0.4	0.0	0.7	143.6		

様式-3		被害額（当面整備H34） 資産+10%					水系名：由良川				河川名：由良川				流量規模：1/5				(百万円)	
地区 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対 価	代替活動等	小計					
			償却	在庫	償却	在庫														
L1	53.6	0.0	2.3	0.4	0.1	0.0	56.3	43.9	29.3	73.3	95.4	0.7	0.0	0.0	0.0	0.9	0.0	1.6	226.6	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	6.2	0.0	0.2	0.0	0.0	0.0	6.4	64.4	49.8	114.1	10.8	0.1	0.0	0.0	0.0	0.1	0.0	0.2	131.5	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	59.7	0.0	2.4	0.5	0.1	0.0	62.7	108.3	79.1	187.4	106.3	0.8	0.0	0.0	0.0	1.0	0.0	1.8	358.2	

表式-3		被害額（当面整備H34）						資産+10%		水系名：由良川				河川名：由良川				流量規模：1/100						(百万円)	
災害 ブロッ ク	一般資産被害額								農作物被害額				公共土木施 設等被害額	営業停止損 失	家屋における 応急対災費用			事業所にお ける応急対 災費用	その他の間 接被害	小計	合計	備考			
	家屋	家屋用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価	代替活動等			小計										
			償却	在庫	償却	在庫																			
L1	1,698.5	317.3	99.6	34.6	7.0	2.9	2,159.9	102.7	51.1	153.8	3,658.9	25.4	11.8	20.0	31.8	36.5	0.0	93.7	6,066.4						
L1-1	25.4	9.9	1.7	0.9	0.0	0.0	31.9	2.5	0.0	2.5	54.0	0.8	0.5	1.0	1.6	0.4	0.0	2.8	91.2						
L1-2	225.4	32.0	13.4	0.6	1.4	0.6	333.4	3.1	2.1	5.1	584.8	5.0	3.3	3.2	6.5	4.0	0.0	15.5	918.9						
L1-3	1,033.7	158.6	49.5	26.1	2.2	0.9	1,271.0	25.1	1.7	26.8	2,153.1	25.0	5.7	4.8	10.4	18.2	0.0	53.6	3,504.5						
L1-4	1,945.2	697.0	171.1	118.7	6.5	2.5	2,941.1	21.5	1.1	22.6	4,982.2	53.9	25.2	20.9	46.1	66.4	0.0	166.4	8,112.3						
L1-5	488.3	164.3	14.9	5.0	2.0	0.8	675.4	9.6	0.5	10.1	1,144.1	5.8	6.0	6.4	12.4	10.9	0.0	29.1	1,858.6						
L1-6	372.6	67.1	15.4	21.5	1.2	0.5	478.2	18.6	3.3	22.0	810.2	7.2	2.6	2.6	5.2	2.7	0.0	15.1	1,325.5						
L1-7	441.5	49.0	9.4	6.4	0.2	0.1	506.4	24.4	1.2	25.5	857.9	2.3	2.1	2.3	4.4	2.9	0.0	9.6	1,399.4						
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
L4	163,101.6	58,187.1	34,034.6	12,594.6	41.4	15.0	267,974.4	23.2	5.4	28.6	453,948.6	10,950.3	2,365.3	1,646.8	4,012.1	9,018.6	0.0	23,881.0	745,832.7						
L5	11,899.8	3,924.9	2,158.5	1,077.2	5.7	2.5	19,068.6	17.6	5.4	22.9	32,302.2	591.5	149.2	164.0	313.2	367.9	0.0	1,272.7	52,666.3						
L6	34,796.5	7,671.6	2,564.9	1,091.4	27.2	10.9	46,162.5	133.0	64.7	197.7	78,199.3	580.6	277.1	273.2	550.3	396.5	0.0	1,527.4	126,086.9						
L7	19,836.0	4,479.1	2,197.0	1,118.1	11.8	4.8	27,646.8	31.8	8.9	40.8	46,833.7	561.4	168.3	191.8	360.0	308.0	0.0	1,229.3	75,750.6						
R1	1,693.0	253.1	92.1	22.0	6.9	2.7	2,069.9	119.1	80.0	199.1	3,506.4	31.9	9.5	16.1	25.6	17.3	0.0	74.8	5,850.2						
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-2	1,281.7	483.4	12.9	3.4	10.1	4.0	1,795.4	28.2	2.7	30.9	3,041.5	5.0	17.1	15.4	32.4	11.2	0.0	48.7	4,916.4						
R1-3	234.7	159.6	7.6	6.0	3.1	1.2	412.3	10.2	0.0	10.2	698.4	3.7	5.7	5.2	10.9	5.3	0.0	19.9	1,140.8						
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R1-5	541.2	195.7	11.0	6.6	2.1	0.8	757.3	11.2	1.6	12.8	1,282.9	3.8	7.5	8.6	16.1	11.7	0.0	31.7	2,084.7						
R1-6	348.4	56.6	0.4	0.3	1.2	0.5	407.4	12.5	4.9	17.4	690.1	0.3	2.2	2.8	5.0	0.7	0.0	6.0	1,120.8						
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0						
R4	6,944.5	431.2	6.5	1.6	6.1	2.4	7,392.1	15.0	5.8	20.8	12,522.3	2.5	15.7	13.3	28.9	8.7	0.0	40.2	19,975.3						
R5	2,941.7	318.3	52.5	27.4	3.2	1.3	3,344.3	37.4	8.4	45.8	5,665.2	10.3	11.5	11.3	22.8	15.1	0.0	48.2	9,103.4						
R6	6,950.6	3,077.9	532.6	315.1	26.1	10.1	10,912.3	93.3	8.0	101.3	18,485.4	136.6	109.9	93.6	203.5	192.0	0.0	532.1	30,031.0						
R7	410.5	359.6	47.0	19.0	0.9	0.4	837.4	0.0	6.5	6.5	1,418.5	13.2	13.2	12.7	25.9	11.8	0.0	50.9	2,313.2						
R8	8,939.2	2,518.8	772.2	363.6	4.6	1.9	12,663.3	8.4	7.1	15.5	21,451.6	187.9	92.2	80.7	172.8	158.8	0.0	519.5	34,650.0						
HR2	2.02	7.8	2.0	1.3	0.0	0.0	102.4	3.4	0.0	3.4	173.5	0.8	0.5	0.9	1.4	0.6	0.0	2.8	282.21						
合計	266,241.2	83,737.0	42,866.7	16,861.5	170.7	66.6	409,943.7	751.7	270.3	1,022.0	694,444.7	13,105.0	3,302.0	2,597.5	5,899.5	10,666.2	0.0	29,670.7	1,135,081.2						

[illegible]

[illegible]

様式－3		被害額（事業実施後H56） 資産+10%					水系名：由良川					河川名：由良川					流量規模：1/50					(百万円)		
氾濫 ブロック	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対価	代替活動等	小計											
			償却	在庫	償却	在庫																		
L1	578.8	15.6	24.0	8.2	1.3	0.5	628.3	90.3	50.6	140.9	1,064.4	6.3	0.7	1.1	1.8	10.6	0.0	0.0	0.0	0.0	0.0	1,852.3		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	1.5	0.1	0.1	0.1	0.0	0.0	1.7	0.0	0.1	0.1	2.9	0.1	0.0	0.0	0.0	0.1	0.0	0.0	0.1	0.0	0.2	5.0		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	446.3	2.4	24.7	5.6	0.9	0.4	480.3	109.4	78.5	187.9	813.6	6.0	0.1	0.2	0.3	3.1	0.0	0.0	3.1	0.0	9.4	1,491.2		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	1,100.7	290.1	127.2	39.8	0.7	0.3	1,558.8	2.8	1.7	4.5	2,640.6	39.1	12.8	22.6	35.3	18.0	0.0	0.0	22.6	0.0	92.4	4,296.3		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	2,127.4	308.1	176.0	53.6	2.9	1.2	2,669.2	202.5	131.0	333.5	4,521.6	51.4	13.5	23.9	37.4	31.7	0.0	0.0	31.7	0.0	120.5	7,644.7		

様式－3		被害額（事業実施後H56）				資産+10%		水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)		
氾濫 ブロック	一般資産被害額								農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対価	代替活動等			小計							
			償却	在庫	償却	在庫																
L1	1,698.5	317.3	99.6	34.6	7.0	2.9	2,159.9	102.7	51.1	153.8	3,658.9	25.4	11.8	20.0	31.8	36.5	0.0	93.7	6,066.4			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	225.4	92.0	13.4	0.6	1.4	0.6	333.4	3.1	2.1	5.1	564.8	5.0	3.3	3.2	6.5	4.0	0.0	15.5	918.9			
L1-3	1,033.7	158.6	49.5	26.1	2.2	0.9	1,271.0	25.1	1.7	26.8	2,153.1	25.0	5.7	4.8	10.4	18.2	0.0	53.6	3,504.5			
L1-4	1,945.2	697.0	171.1	118.7	6.5	2.5	2,941.1	21.5	1.1	22.6	4,982.2	53.9	25.2	20.9	46.1	66.4	0.0	166.4	8,112.3			
L1-5	488.3	164.3	14.9	5.0	2.0	0.8	675.4	9.6	0.5	10.1	1,144.1	5.8	6.0	6.4	12.4	10.9	0.0	29.1	1,858.6			
L1-6	372.6	67.1	15.4	21.5	1.2	0.5	478.2	18.6	3.3	22.0	810.2	7.2	2.6	2.6	5.2	2.7	0.0	15.1	1,325.5			
L1-7	441.5	49.0	9.4	6.4	0.2	0.1	506.4	24.4	1.2	25.5	857.9	2.3	2.1	2.3	4.4	2.9	0.0	9.6	1,399.4			
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	108,500.5	43,235.5	26,615.9	9,575.4	30.4	11.6	187,969.4	23.1	5.3	28.3	318,420.1	7,199.2	1,721.4	1,430.2	3,151.6	6,659.2	0.0	17,010.0	523,427.7			
L5	11,899.8	3,924.9	2,158.5	1,077.2	5.7	2.5	19,068.6	17.5	5.4	22.9	32,302.2	591.5	149.2	164.0	313.2	367.9	0.0	1,272.7	52,666.3			
L6	20,133.4	1,801.6	696.9	141.0	12.6	5.4	22,790.8	126.9	66.1	193.1	38,607.7	130.9	67.3	98.1	165.5	78.7	0.0	375.0	61,966.5			
L7	13,650.9	2,917.5	1,194.7	573.0	5.4	2.2	18,343.8	39.9	11.8	51.7	31,074.3	383.6	124.1	165.9	290.0	172.6	0.0	846.2	50,316.0			
R1	1,685.0	251.5	92.1	22.0	6.8	2.7	2,060.1	119.1	79.9	199.0	3,489.8	31.9	9.4	15.9	25.4	17.2	0.0	74.4	5,823.4			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	1,281.7	483.4	12.9	3.4	10.1	4.0	1,795.4	28.2	2.7	30.9	3,041.5	5.0	17.1	15.4	32.4	11.2	0.0	48.7	4,916.4			
R1-3	234.7	159.6	7.6	6.0	3.1	1.2	412.3	10.2	0.0	10.2	698.4	3.7	5.7	5.2	10.9	5.3	0.0	19.9	1,140.8			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	541.2	195.7	11.0	6.6	2.1	0.8	757.3	11.4	1.7	13.0	1,282.9	3.8	7.5	8.6	16.1	11.7	0.0	31.7	2,084.9			
R1-6	348.4	56.6	0.4	0.3	1.2	0.5	407.4	12.5	4.9	17.4	690.1	0.3	2.2	2.8	5.0	0.7	0.0	6.0	1,120.8			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	6,944.5	431.2	6.5	1.6	6.1	2.4	7,392.1	14.9	5.8	20.7	12,522.3	2.5	15.7	13.3	28.9	8.7	0.0	40.2	19,975.3			
R5	2,873.9	296.2	37.5	19.8	2.9	1.2	3,231.5	34.7	8.1	42.8	5,474.1	8.3	10.6	10.3	20.9	13.2	0.0	42.4	8,790.8			
R6	4,259.5	1,809.4	346.7	173.8	14.5	6.5	6,610.4	101.7	7.6	109.3	11,197.9	81.9	65.5	70.8	136.2	106.2	0.0	324.4	18,241.9			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	5,836.6	1,685.2	598.5	251.0	3.0	1.3	8,375.6	8.1	7.2	15.2	14,188.3	132.9	62.1	65.4	127.4	104.6	0.0	365.0	22,944.1			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	184,395.2	58,793.7	32,152.4	12,064.1	124.2	50.4	287,580.1	753.1	267.4	1,020.5	487,160.6	8,700.1	2,314.4	2,126.1	4,440.5	7,698.9	0.0	20,839.4	796,600.6			

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/2		（百万円）						
地区ブロック	家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等						小計
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/3		（百万円）						
地区ブロック	家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等						小計
L4	397.0	73.2	54.4	18.9	0.1	0.0	543.6	8.2	2.2	10.4	920.8	28.7	6.0	11.2	17.2	13.7	0.0	59.6	1,534.4	
合計	397.0	73.2	54.4	18.9	0.1	0.0	543.6	8.2	2.2	10.4	920.8	28.7	6.0	11.2	17.2	13.7	0.0	59.6	1,534.4	

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/5		（百万円）						
地区ブロック	家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等						小計
L4	1,393.1	307.1	224.5	80.0	0.2	0.1	2,005.0	9.2	2.3	11.5	3,396.5	116.3	24.4	45.1	69.5	50.8	0.0	236.6	5,649.6	
合計	1,393.1	307.1	224.5	80.0	0.2	0.1	2,005.0	9.2	2.3	11.5	3,396.5	116.3	24.4	45.1	69.5	50.8	0.0	236.6	5,649.6	

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/7		（百万円）						
地区ブロック	家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等						小計
L4	2,602.5	594.8	445.8	156.7	0.4	0.2	3,800.4	9.5	2.3	11.8	6,437.8	226.1	47.7	88.2	135.9	99.9	0.0	461.9	10,711.9	
合計	2,602.5	594.8	445.8	156.7	0.4	0.2	3,800.4	9.5	2.3	11.8	6,437.8	226.1	47.7	88.2	135.9	99.9	0.0	461.9	10,711.9	

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/10		（百万円）						
地区ブロック	家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等						小計
L4	4,323.9	1,057.9	771.0	264.7	0.8	0.3	6,418.6	9.9	2.3	12.2	10,873.2	370.0	77.1	141.1	218.2	166.7	0.0	754.9	18,058.9	
合計	4,323.9	1,057.9	771.0	264.7	0.8	0.3	6,418.6	9.9	2.3	12.2	10,873.2	370.0	77.1	141.1	218.2	166.7	0.0	754.9	18,058.9	

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/20		（百万円）						
地区ブロック	家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等						小計
L4	8,105.8	2,288.2	1,514.7	503.9	2.2	0.9	12,415.7	10.2	2.4	12.6	21,032.2	661.0	135.8	243.6	379.4	308.1	0.0	1,348.5	34,809.0	
合計	8,105.8	2,288.2	1,514.7	503.9	2.2	0.9	12,415.7	10.2	2.4	12.6	21,032.2	661.0	135.8	243.6	379.4	308.1	0.0	1,348.5	34,809.0	

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/30		（百万円）						
地区ブロック	家屋	家庭用品	一般資産被害額		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等						小計
L4	10,560.5	3,192.5	2,058.3	679.1	3.1	1.3	16,494.8	10.5	2.4	12.9	27,942.0	858.6	174.9	307.9	482.8	411.8	0.0	1,753.2	46,202.9	
合計	10,560.5	3,192.5	2,058.3	679.1	3.1	1.3	16,494.8	10.5	2.4	12.9	27,942.0	858.6	174.9	307.9	482.8	411.8	0.0	1,753.2	46,202.9	

様式-3		被害額（福知山市街地内水）（現況H29） 資産+10%						水系名：由良川			河川名：由良川			流量規模：1/2						（百万円）	
地区ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			事業所資産		農漁家資産			水稲	畑作物	小計			清掃労働対価	代替活動等	小計						
			償却	在庫	償却	在庫															
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

様式-3		被害額（福知山市街地内水）（現況H29） 資産+10%						水系名：由良川			河川名：由良川			流量規模：1/3						（百万円）	
地区ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			事業所資産		農漁家資産			水稲	畑作物	小計			清掃労働対価	代替活動等	小計						
			償却	在庫	償却	在庫															
L4	119.1	7.6	7.5	2.8	0.0	0.0	137.0	7.9	2.1	10.0	232.1	3.6	0.6	1.1	1.7	2.6	0.0	7.9	387.0		
合計	119.1	7.6	7.5	2.8	0.0	0.0	137.0	7.9	2.1	10.0	232.1	3.6	0.6	1.1	1.7	2.6	0.0	7.9	387.0		

様式-3		被害額（福知山市街地内水）（現況H29） 資産+10%						水系名：由良川			河川名：由良川			流量規模：1/5						（百万円）	
地区ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			事業所資産		農漁家資産			水稲	畑作物	小計			清掃労働対価	代替活動等	小計						
			償却	在庫	償却	在庫															
L4	548.5	93.9	70.5	25.2	0.1	0.0	738.2	8.8	2.2	11.0	1,250.7	35.9	7.6	14.0	21.6	18.1	0.0	75.6	2,075.5		
合計	548.5	93.9	70.5	25.2	0.1	0.0	738.2	8.8	2.2	11.0	1,250.7	35.9	7.6	14.0	21.6	18.1	0.0	75.6	2,075.5		

様式-3		被害額（福知山市街地内水）（現況H29） 資産+10%						水系名：由良川			河川名：由良川			流量規模：1/7						（百万円）	
地区ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			事業所資産		農漁家資産			水稲	畑作物	小計			清掃労働対価	代替活動等	小計						
			償却	在庫	償却	在庫															
L4	1,457.9	285.1	234.7	83.1	0.2	0.1	2,061.1	9.2	2.3	11.5	3,491.5	124.9	25.7	47.7	73.4	55.0	0.0	253.3	5,817.4		
合計	1,457.9	285.1	234.7	83.1	0.2	0.1	2,061.1	9.2	2.3	11.5	3,491.5	124.9	25.7	47.7	73.4	55.0	0.0	253.3	5,817.4		

様式-3		被害額（福知山市街地内水）（現況H29） 資産+10%						水系名：由良川			河川名：由良川			流量規模：1/10						（百万円）	
地区ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			事業所資産		農漁家資産			水稲	畑作物	小計			清掃労働対価	代替活動等	小計						
			償却	在庫	償却	在庫															
L4	2,779.9	568.0	483.9	168.0	0.4	0.2	4,000.4	9.7	2.3	12.0	6,776.5	251.9	51.1	95.5	146.6	109.9	0.0	508.4	11,297.3		
合計	2,779.9	568.0	483.9	168.0	0.4	0.2	4,000.4	9.7	2.3	12.0	6,776.5	251.9	51.1	95.5	146.6	109.9	0.0	508.4	11,297.3		

様式-3		被害額（福知山市街地内水）（現況H29） 資産+10%						水系名：由良川			河川名：由良川			流量規模：1/20						（百万円）	
地区ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			事業所資産		農漁家資産			水稲	畑作物	小計			清掃労働対価	代替活動等	小計						
			償却	在庫	償却	在庫															
L4	6,341.5	1,625.1	1,160.4	385.5	1.6	0.6	9,514.7	10.0	2.3	12.3	16,117.9	531.8	107.1	195.8	302.9	241.3	0.0	1,076.0	26,720.9		
合計	6,341.5	1,625.1	1,160.4	385.5	1.6	0.6	9,514.7	10.0	2.3	12.3	16,117.9	531.8	107.1	195.8	302.9	241.3	0.0	1,076.0	26,720.9		

様式-3		被害額（福知山市街地内水）（現況H29） 資産+10%						水系名：由良川			河川名：由良川			流量規模：1/30						（百万円）	
地区ブロック	家屋	家庭用品	一般資産被害額				小計	農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			事業所資産		農漁家資産			水稲	畑作物	小計			清掃労働対価	代替活動等	小計						
			償却	在庫	償却	在庫															
L4	8,752.1	2,443.2	1,647.4	541.3	2.5	1.0	13,387.5	10.3	2.4	12.7	22,678.2	713.2	143.8	259.3	403.1	333.8	0.0	1,450.1	37,528.5		
合計	8,752.1	2,443.2	1,647.4	541.3	2.5	1.0	13,387.5	10.3	2.4	12.7	22,678.2	713.2	143.8	259.3	403.1	333.8	0.0	1,450.1	37,528.5		

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/2		（百万円）					
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考
			償却	在庫	償却	在庫							清掃労働対価	代替活動等					
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/3		（百万円）					
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考
			償却	在庫	償却	在庫							清掃労働対価	代替活動等					
L4	16.1	0.2	0.6	0.3	0.0	0.0	17.2	6.6	1.4	8.0	29.1	0.3	0.0	0.0	0.0	0.3	0.0	0.6	54.9
合計	16.1	0.2	0.6	0.3	0.0	0.0	17.2	6.6	1.4	8.0	29.1	0.3	0.0	0.0	0.0	0.3	0.0	0.6	54.9

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/5		（百万円）					
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考
			償却	在庫	償却	在庫							清掃労働対価	代替活動等					
L4	82.2	2.4	3.1	1.5	0.0	0.0	89.2	7.8	2.0	9.8	151.1	1.3	0.2	0.3	0.5	1.3	0.0	3.1	253.2
合計	82.2	2.4	3.1	1.5	0.0	0.0	89.2	7.8	2.0	9.8	151.1	1.3	0.2	0.3	0.5	1.3	0.0	3.1	253.2

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/7		（百万円）					
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考
			償却	在庫	償却	在庫							清掃労働対価	代替活動等					
L4	145.7	8.7	7.1	3.5	0.0	0.0	165.0	8.2	2.2	10.4	279.6	2.7	0.4	0.8	1.2	2.9	0.0	6.8	461.8
合計	145.7	8.7	7.1	3.5	0.0	0.0	165.0	8.2	2.2	10.4	279.6	2.7	0.4	0.8	1.2	2.9	0.0	6.8	461.8

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/10		（百万円）					
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考
			償却	在庫	償却	在庫							清掃労働対価	代替活動等					
L4	332.7	31.0	26.5	11.5	0.1	0.0	401.8	8.8	2.2	11.0	680.6	12.2	2.5	4.5	7.0	8.5	0.0	27.7	1,121.1
合計	332.7	31.0	26.5	11.5	0.1	0.0	401.8	8.8	2.2	11.0	680.6	12.2	2.5	4.5	7.0	8.5	0.0	27.7	1,121.1

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/20		（百万円）					
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考
			償却	在庫	償却	在庫							清掃労働対価	代替活動等					
L4	1,762.6	259.3	290.4	101.1	0.2	0.1	2,413.7	9.5	2.3	11.8	4,088.7	155.0	29.8	56.3	86.1	70.4	0.0	311.5	6,825.7
合計	1,762.6	259.3	290.4	101.1	0.2	0.1	2,413.7	9.5	2.3	11.8	4,088.7	155.0	29.8	56.3	86.1	70.4	0.0	311.5	6,825.7

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産+10%						水系名：由良川		河川名：由良川		流量規模：1/30		（百万円）					
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考
			償却	在庫	償却	在庫							清掃労働対価	代替活動等					
L4	3,275.9	607.5	585.4	194.3	0.6	0.2	4,663.9	9.7	2.3	12.0	7,900.4	291.8	54.9	103.1	158.0	131.3	0.0	581.1	13,157.4
合計	3,275.9	607.5	585.4	194.3	0.6	0.2	4,663.9	9.7	2.3	12.0	7,900.4	291.8	54.9	103.1	158.0	131.3	0.0	581.1	13,157.4

[illegible]

様式-3 被害額（事業実施前H15） 資産-10% 水系名：由良川 河川名：由良川 流量規模：1/10 （百万円）

地区 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	災害停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の関係 被害額	小計	合計	備考	
	家屋	家屋用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対 価		代替活動等							小計
			償却	在庫	償却	在庫																
L1	93.4	8.3	5.4	1.8	0.2	0.1	109.1	40.1	29.7	69.9	184.8	1.8	0.4	0.4	0.8	3.3	0.0	5.9	369.8			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	2.9	0.4	0.1	0.0	0.0	0.0	3.4	0.8	0.5	1.3	5.8	0.1	0.1	0.1	0.2	0.1	0.0	0.3	10.7			
L1-3	8.4	0.7	0.6	0.3	0.0	0.0	10.0	8.7	0.4	9.1	16.9	0.5	0.0	0.1	0.1	0.2	0.0	0.8	36.9			
L1-4	65.5	14.7	8.5	4.1	0.2	0.1	93.0	8.0	0.4	8.4	157.5	3.3	0.8	1.3	2.2	3.0	0.0	8.4	267.3			
L1-5	2.2	0.1	0.2	0.0	0.0	0.0	2.5	1.5	0.3	1.8	4.2	0.1	0.0	0.0	0.1	0.1	0.0	0.3	8.8			
L1-6	5.9	0.6	0.0	0.0	0.0	0.0	6.6	6.9	1.5	8.4	11.2	0.0	0.0	0.1	0.1	0.0	0.0	0.1	26.3			
L1-7	6.8	0.3	0.1	0.0	0.0	0.0	7.2	2.3	0.3	2.7	12.2	0.0	0.0	0.1	0.1	0.0	0.0	0.2	22.4			
L1-8	296.7	0.3	2.1	0.7	0.0	0.0	299.8	10.1	9.8	19.9	507.9	0.9	0.1	0.1	0.2	0.7	0.0	1.8	829.4			
L2	114.8	14.8	0.4	0.3	0.0	0.0	130.3	12.1	0.0	12.1	220.8	0.2	0.7	1.0	1.7	0.4	0.0	2.3	365.5			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	25.1	3.5	3.7	1.2	0.0	0.0	33.5	0.0	0.0	0.0	56.8	2.7	0.7	1.3	2.0	1.4	0.0	6.1	96.4			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	1,899.2	46.1	16.7	9.1	0.2	0.1	1,971.3	34.9	37.8	72.7	3,339.4	6.9	3.8	6.3	10.1	2.6	0.0	19.6	5,402.9			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	40.1	1.9	2.0	0.6	0.0	0.0	44.7	70.6	50.0	120.5	75.7	0.8	0.2	0.3	0.5	0.5	0.0	1.8	242.6			
R1-1	16.7	6.6	0.1	0.0	0.0	0.0	23.3	8.1	1.8	9.9	39.5	0.0	0.3	0.5	0.7	0.1	0.0	0.8	73.6			
R1-2	18.9	1.7	0.0	0.0	0.0	0.0	20.7	9.6	0.7	10.3	35.1	0.0	0.1	0.2	0.3	0.0	0.0	0.3	66.4			
R1-3	4.5	0.8	1.0	0.5	0.0	0.0	6.8	6.1	0.0	6.1	11.6	0.5	0.0	0.1	0.1	0.3	0.0	0.9	25.3			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	1.8	0.6	0.1	0.0	0.0	0.0	2.5	1.1	0.2	1.3	4.3	0.0	0.0	0.1	0.1	0.1	0.0	0.2	8.4			
R1-6	2.5	0.1	0.0	0.0	0.0	0.0	2.6	3.7	2.1	5.9	4.4	0.0	0.0	0.0	0.1	0.0	0.0	0.1	12.9			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	1,009.6	15.1	0.3	0.0	0.2	0.1	1,025.3	7.5	8.3	15.7	1,736.8	0.1	0.7	0.9	1.6	0.4	0.0	2.1	2,779.9			
R5	282.1	8.9	1.2	0.6	0.1	0.0	292.9	21.5	5.4	26.9	496.2	0.4	0.5	0.9	1.4	0.4	0.0	2.2	818.2			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	3,897.3	125.5	42.3	19.2	1.0	0.4	4,085.6	253.7	149.2	403.0	6,921.1	18.3	8.4	13.8	22.2	13.5	0.0	54.0	11,463.7			

様式-3 被害額(事業実施前H15) 資産-10% 水系名: 由良川 河川名: 由良川 流量規模: 1/20 (百万円)

心電 ブロッ ク	一般資産被害額							農作物被害額				公共土木施設等被害額	営業停止損失	家庭における応急対策費用			事業所における応急対策費用	その他の関係被害	小計	合計	備考
	家屋	家屋用品	事業所資産		農産家資産		小計	水稲	畑作物	小計	倉庫等被害額			清障労働対象	代替活動等	小計					
			償却	在庫	償却	在庫															
L1	188.0	12.2	10.2	3.0	0.2	0.1	213.7	53.6	36.3	89.9	362.0	3.3	0.8	1.1	1.9	6.0	0.0	11.2	676.7		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	23.3	8.0	0.8	0.0	0.2	0.1	32.3	1.5	1.1	2.6	54.8	0.5	0.4	0.7	1.1	0.3	0.0	2.0	91.6		
L1-3	116.2	8.7	8.1	2.5	0.1	0.1	135.7	14.3	0.6	14.9	229.8	5.1	0.6	0.9	1.5	2.4	0.0	9.0	389.3		
L1-4	176.0	60.0	24.9	12.9	0.5	0.2	274.5	9.5	0.5	10.0	464.9	8.2	2.7	3.5	6.3	8.9	0.0	23.3	772.8		
L1-5	7.2	1.5	0.5	0.1	0.0	0.0	9.4	2.2	0.3	2.5	16.0	0.3	0.1	0.1	0.2	0.3	0.0	0.7	28.6		
L1-6	20.2	2.5	0.0	0.0	0.1	0.0	22.8	7.8	1.5	9.3	38.5	0.0	0.2	0.2	0.3	0.0	0.4	7.4	70.9		
L1-7	32.5	3.4	0.4	0.2	0.0	0.0	36.5	15.8	0.3	16.1	61.8	0.1	0.2	0.2	0.4	0.2	0.0	0.7	115.1		
L1-8	437.2	3.9	6.1	2.7	0.0	0.0	450.0	10.7	9.9	20.6	762.2	2.1	0.2	0.3	0.5	2.5	0.0	5.2	1,238.0		
L2	190.8	33.9	1.7	1.6	0.2	0.1	228.3	12.3	0.0	12.3	386.7	1.2	1.6	2.3	3.9	0.9	0.0	6.0	633.3		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	23,642.6	8,948.4	5,934.4	1,817.0	7.4	3.3	40,352.9	17.6	4.3	21.9	68,357.8	2,238.7	451.9	664.9	1,116.8	1,419.1	0.0	4,774.5	113,507.2		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	6,646.1	503.2	375.7	63.3	3.1	1.2	7,592.7	72.8	48.1	120.9	12,862.0	93.6	28.2	49.3	77.5	45.2	0.0	216.3	20,791.9		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	148.3	20.2	21.1	3.8	0.5	0.2	194.2	78.8	57.3	136.2	329.0	7.6	1.0	1.7	2.7	2.5	0.0	12.8	672.1		
R1-1	29.0	12.7	0.4	0.1	0.0	0.0	42.2	9.8	2.1	12.0	71.6	0.2	0.5	0.7	1.2	0.3	0.0	1.7	127.4		
R1-2	71.5	14.1	0.1	0.0	0.3	0.1	86.1	10.9	1.6	12.4	145.9	0.1	0.7	0.9	1.6	0.1	0.0	1.7	246.3		
R1-3	19.3	6.8	3.6	2.2	0.1	0.1	32.2	6.5	0.0	6.5	54.5	1.3	0.4	0.7	1.2	1.2	0.0	3.6	96.8		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	3.9	1.9	0.2	0.1	0.0	0.0	6.2	2.8	0.3	3.1	10.5	0.1	0.1	0.1	0.2	0.2	0.0	0.5	20.2		
R1-6	8.9	0.8	0.0	0.0	0.0	0.0	9.8	4.3	2.4	6.7	16.6	0.0	0.0	0.1	0.1	0.0	0.0	0.1	33.3		
R2	1.4	0.4	0.0	0.0	0.0	0.0	1.9	0.0	0.0	0.0	3.1	0.0	0.0	0.0	0.1	0.0	0.0	0.1	5.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	1,921.5	34.5	0.6	0.1	0.4	0.2	1,957.3	8.6	9.9	18.4	3,315.8	0.3	1.8	2.2	3.9	0.9	0.0	5.2	5,296.7		
R5	527.4	33.2	7.2	2.9	0.4	0.2	571.3	23.1	5.9	28.9	967.7	2.1	1.6	2.4	4.0	1.5	0.0	7.6	1,575.5		
R6	65.1	66.5	2.2	1.2	0.4	0.2	135.6	0.0	0.0	229.7	0.6	3.0	4.4	7.4	1.1	0.0	0.1	374.5			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	34,276.6	9,776.9	6,398.2	1,913.7	14.0	6.0	52,385.4	362.9	182.3	545.2	88,740.9	2,365.3	496.0	736.7	1,232.7	1,493.6	0.0	5,091.7	146,763.2		

様式－３		被害額（事業実施前H15）					資産-10%					水系名：由良川					河川名：由良川					流量規模：1/50					(百万円)			
氾濫 ブロック	一般資産被害額															農作物被害額					公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価	代替活動等	小計																	
			償却	在庫	償却	在庫																								
L1	530.3	82.2	32.3	9.4	1.4	0.6	656.1	68.0	40.4	108.4	1,111.5	10.7	4.1	6.2	10.3	14.8	0.0	35.8	1,911.9											
L1-1	4.1	1.0	0.4	0.2	0.0	0.0	5.8	0.0	0.0	0.0	9.8	0.2	0.2	0.3	0.5	0.1	0.0	0.8	16.4											
L1-2	58.1	22.1	2.8	0.1	0.4	0.2	83.7	1.8	1.4	3.2	141.7	1.4	1.0	1.3	2.3	1.0	0.0	4.7	233.3											
L1-3	261.1	38.1	20.4	8.2	0.6	0.3	328.6	15.5	0.8	16.3	556.6	9.3	1.7	2.1	3.8	6.3	0.0	19.4	920.9											
L1-4	512.0	153.3	57.0	33.9	1.5	0.6	758.3	10.8	0.6	11.4	1,284.6	18.2	6.8	7.6	14.4	23.0	0.0	55.6	2,109.8											
L1-5	58.6	19.4	3.8	0.9	0.2	0.1	82.9	3.4	0.3	3.6	140.5	1.6	0.9	1.4	2.3	2.3	0.0	6.2	233.3											
L1-6	89.9	14.1	3.4	3.4	0.3	0.1	111.3	8.4	1.6	10.0	188.6	1.9	0.6	0.9	1.6	0.5	0.0	3.9	313.8											
L1-7	96.6	11.0	1.7	1.0	0.0	0.0	110.4	17.2	0.3	17.5	187.0	0.5	0.5	0.7	1.2	0.7	0.0	2.5	317.4											
L1-8	1,022.8	48.0	32.7	14.7	0.2	0.1	1,118.4	11.1	10.2	21.3	1,894.6	12.7	2.3	3.6	5.9	10.9	0.0	29.5	3,963.9											
L2	416.7	89.0	6.6	6.2	0.7	0.3	519.6	16.7	0.0	16.7	880.1	3.5	4.1	4.7	8.8	3.1	0.0	15.4	1,431.8											
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L4	82,962.5	33,130.0	20,706.1	7,425.9	23.5	9.1	144,257.2	19.5	4.4	24.0	244,371.7	6,749.3	1,620.7	1,386.2	3,006.9	6,169.9	0.0	15,926.2	404,579.0											
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
L6	18,083.2	3,782.4	1,568.1	609.2	12.2	5.0	24,060.2	83.8	54.2	137.9	40,758.0	407.7	176.6	200.3	376.8	252.1	0.0	1,036.7	65,992.9											
L7	13,351.7	2,714.7	1,241.6	621.9	7.6	3.0	17,940.5	25.8	7.5	33.4	30,391.2	424.3	128.7	154.3	283.1	230.0	0.0	937.4	49,302.4											
R1	533.2	86.8	70.9	15.6	2.0	0.9	709.5	85.7	61.3	147.1	1,201.8	21.2	4.3	5.2	9.4	10.2	0.0	40.8	2,099.1											
R1-1	115.3	34.0	1.8	0.6	0.1	0.0	151.8	9.9	3.2	13.1	257.2	0.6	1.7	2.3	4.1	1.4	0.0	6.1	428.2											
R1-2	240.9	60.9	2.2	0.4	1.7	0.7	306.8	12.2	1.6	13.8	519.7	1.6	3.2	4.9	8.2	1.8	0.0	11.5	851.8											
R1-3	60.2	37.4	4.9	3.6	0.8	0.3	107.2	6.8	0.0	6.8	181.6	2.3	1.6	2.1	3.8	2.7	0.0	8.7	304.4											
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R1-5	86.8	26.3	1.9	1.1	0.2	0.1	116.4	7.7	1.0	8.7	197.3	0.7	1.2	1.7	2.9	2.2	0.0	5.8	328.3											
R1-6	66.9	8.4	0.0	0.0	0.3	0.1	75.7	6.1	2.6	8.7	128.3	0.0	0.4	0.6	1.0	0.1	0.0	1.1	213.8											
R2	4.5	1.3	0.0	0.0	0.0	0.0	5.7	0.0	0.0	0.0	9.7	0.0	0.1	0.1	0.1	0.0	0.0	0.1	15.6											
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
R4	2,905.4	65.3	1.1	0.2	0.9	0.4	2,973.2	8.9	10.6	19.5	5,036.6	0.5	2.9	3.3	6.2	1.5	0.0	8.2	8,037.5											
R5	1,024.9	106.5	28.1	12.6	1.4	0.6	1,174.0	24.2	6.0	30.2	1,988.8	6.8	4.9	6.0	10.9	6.9	0.0	24.6	3,217.6											
R6	4,103.1	1,878.7	356.2	195.2	15.2	6.3	6,554.6	62.2	3.4	65.6	11,103.5	105.4	83.9	78.4	162.3	143.9	0.0	411.6	18,135.3											
R7	197.7	175.2	21.2	7.5	0.5	0.2	402.4	0.0	5.1	5.1	681.6	7.8	7.9	8.9	16.8	6.4	0.0	31.0	1,120.1											
R8	3,426.7	1,072.8	415.9	165.2	1.9	0.9	5,083.3	6.1	5.5	11.6	8,611.2	108.5	49.3	55.1	104.4	81.7	0.0	294.6	14,000.7											
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1	0.0	1.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0											
合計	130,213.1	43,659.0	24,581.1	9,137.0	73.6	30.0	207,693.8	512.8	222.3	735.1	351,833.3	7,896.7	2,109.6	1,938.4	4,048.0	6,973.5	0.0	18,918.2	579,180.3											

様式－３		被害額（事業実施前H15）				資産-10%		水系名：由良川				河川名：由良川				流量規模：1/100						(百万円)		
氾濫 ブロック	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対 価		代替活動等	小計										
			償却	在庫	償却	在庫					小計													
L1	1,654.2	421.8	117.3	41.9	6.0	2.4	2,243.5	79.8	41.4	121.2	3,800.5	37.4	20.0	27.3	47.4	49.3	0.0	134.1	6,299.4					
L1-1	20.8	3.2	1.4	0.8	0.0	0.0	26.1	2.0	0.0	2.0	44.2	0.8	0.5	1.0	1.6	0.4	0.0	2.8	75.1					
L1-2	141.7	56.3	7.1	0.3	0.9	0.4	206.7	2.1	1.5	3.6	350.1	3.0	2.5	2.8	5.3	2.7	0.0	11.0	571.4					
L1-3	514.7	82.2	31.9	15.1	1.3	0.5	645.7	16.5	0.8	17.3	1,093.9	16.1	3.6	3.8	7.3	12.0	0.0	35.4	1,792.2					
L1-4	1,000.3	334.2	95.4	64.7	3.1	1.2	1,499.0	11.2	0.6	11.8	2,539.3	35.9	15.2	14.2	29.4	45.3	0.0	110.6	4,160.7					
L1-5	362.9	125.2	11.1	3.8	1.5	0.6	505.1	4.0	0.3	4.3	855.7	5.3	5.6	6.0	11.5	10.0	0.0	26.8	1,392.0					
L1-6	253.2	46.0	10.4	14.0	0.9	0.3	324.9	8.5	1.6	10.2	550.3	5.6	2.1	2.3	4.4	2.1	0.0	12.1	897.4					
L1-7	361.2	40.1	7.7	5.3	0.1	0.0	414.4	18.3	0.8	19.1	701.9	2.3	2.1	2.3	4.4	2.9	0.0	9.6	1,144.9					
L1-8	3,137.6	389.3	159.9	78.6	1.2	0.6	3,767.1	12.0	10.6	22.6	6,381.5	55.5	17.8	22.2	40.0	63.1	0.0	158.6	10,329.8					
L2	789.1	206.4	21.0	19.1	1.9	0.8	1,038.3	17.7	0.0	17.7	1,759.0	10.0	9.3	9.5	18.8	9.9	0.0	38.6	2,853.6					
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
L4	149,307.4	50,864.2	29,804.8	11,021.2	37.0	13.3	241,047.9	19.9	4.5	24.5	408,335.2	12,436.2	2,577.7	1,773.5	4,351.2	9,451.1	0.0	26,238.5	675,646.1					
L5	21,056.2	7,220.0	3,152.6	1,972.5	10.2	3.8	33,415.3	12.1	4.1	16.1	56,805.6	1,242.2	324.4	254.0	578.3	723.9	0.0	2,544.5	92,581.5					
L6	34,597.8	6,997.7	2,228.0	930.2	26.4	11.1	44,791.1	95.5	57.4	152.9	75,876.2	587.6	306.8	303.9	610.6	404.1	0.0	1,602.3	122,422.5					
L7	16,951.9	3,907.0	1,934.0	979.5	10.1	4.2	23,786.6	26.4	7.4	33.8	40,294.6	600.6	179.8	203.3	383.1	330.4	0.0	1,314.1	65,429.1					
R1	1,608.1	330.2	127.0	33.7	7.0	2.7	2,108.7	92.9	63.5	156.3	3,572.1	47.6	15.3	17.9	33.2	28.9	0.0	109.6	5,946.8					
R1-1	229.4	81.8	4.7	1.8	0.2	0.1	317.9	10.2	3.7	13.9	538.6	1.4	3.3	4.1	7.4	3.3	0.0	12.1	882.5					
R1-2	526.6	191.2	5.9	1.3	4.0	1.8	730.8	12.7	1.6	14.3	1,238.0	2.8	8.4	9.5	17.9	5.0	0.0	25.7	2,008.8					
R1-3	130.4	88.8	5.8	4.5	1.7	0.7	231.9	7.1	0.0	7.1	392.9	3.4	4.0	4.1	8.0	4.1	0.0	15.5	647.4					
R1-4	11.7	14.0	0.1	0.1	0.3	0.1	26.3	2.0	0.0	2.0	44.5	0.1	0.7	0.9	1.5	0.4	0.0	2.0	74.7					
R1-5	405.6	141.2	8.9	5.3	1.3	0.6	563.0	8.5	1.1	9.6	953.6	3.8	6.9	7.7	14.6	11.4	0.0	29.8	1,555.9					
R1-6	247.0	41.1	0.4	0.3	0.8	0.3	289.0	7.4	2.8	10.2	491.1	0.3	2.0	2.7	4.7	0.7	0.0	5.7	796.9					
R2	71.2	8.9	0.0	0.0	0.2	0.1	80.4	0.1	0.0	0.1	136.2	0.0	0.5	0.9	1.4	0.0	0.0	1.4	218.0					
R3	3,749.5	1,658.9	137.1	72.7	11.9	4.5	5,634.5	35.6	17.7	53.2	9,544.9	52.1	74.7	65.7	140.3	76.9	0.0	269.4	15,502.1					
R4	4,131.4	121.0	2.2	0.3	1.6	0.6	4,257.1	9.1	10.7	19.9	7,211.5	0.9	5.5	5.7	11.2	2.9	0.0	15.0	11,503.4					
R5	1,850.1	235.1	90.0	48.8	3.1	1.3	2,229.4	25.9	6.3	32.1	3,774.8	17.3	10.5	10.1	20.6	18.4	0.0	56.3	6,091.6					
R6	6,504.9	2,839.4	464.7	281.0	24.2	9.0	10,123.3	80.3	7.7	88.0	17,148.8	156.2	122.9	99.9	222.8	220.3	0.0	599.2	27,959.3					
R7	403.0	357.9	43.7	18.1	1.0	0.4	824.0	0.0	5.3	5.3	1,395.8	15.5	15.7	14.3	30.0	13.8	0.0	59.3	2,284.4					
R8	7,978.1	2,390.4	669.6	327.4	4.4	1.7	11,371.5	7.0	5.8	12.8	19,263.4	206.1	102.3	84.6	186.9	178.1	0.0	571.1	31,218.7					
HR2	118.1	11.7	2.4	1.6	0.1	0.0	134.0	2.8	0.0	2.8	227.0	1.1	0.7	1.3	2.0	0.8	0.0	3.9	367.6					
合計	258,113.9	79,205.2	39,144.9	15,943.8	162.3	63.3	392,633.5	627.6	257.1	884.7	665,121.2	15,546.9	3,840.7	2,955.1	6,795.8	11,672.2	0.0	34,014.9	1,092,654.2					

[illegible]

様式-3		被害額（現況H29）		資産-10%		水系名：由良川				河川名：由良川				流量規模：1/3				(百万円)		
地区 ブロック	一般資産被害額						農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物			小計	清掃労働対価	代替活動等						小計
			償却	在庫	償却	在庫														
L1	16.1	0.0	0.6	0.1	0.0	0.0	16.8	13.3	11.4	24.8	28.5	0.3	0.0	0.0	0.0	0.4	0.0	0.7	70.7	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.4	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.6	0.0	0.0	0.0	0.0	0.0	0.6	0.5	0.5	1.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	1.1	0.0	0.0	0.0	0.0	0.0	1.1	28.5	22.0	50.5	1.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	53.5	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.7	0.4	5.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	17.8	0.0	0.6	0.1	0.0	0.0	18.5	47.2	34.7	81.9	31.4	0.3	0.0	0.0	0.0	0.4	0.0	0.7	132.5	

様式-3		被害額（現況H29）		資産-10%		水系名：由良川				河川名：由良川				流量規模：1/5				(百万円)			
沿岸 ブロック	一般資産被害額						農作物被害額			公共土木 施設等被害額	営業停止損 失	家屋における 応急対策費用			事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物			小計	清掃労働対 価	代替活動等						小計	
			償却	在庫	償却	在庫															
L1	42.2	0.0	1.7	0.3	0.0	0.0	44.3	34.4	23.3	57.7	75.1	0.7	0.0	0.0	0.0	0.8	0.0	1.5	178.6		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.3	1.2	5.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.5		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	2,297.6	228.4	33.1	10.5	3.9	1.6	2,575.4	32.4	29.2	61.6	4,362.7	13.5	10.6	16.8	27.5	8.2	0.0	49.1	7,048.8		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	4.3	0.0	0.1	0.0	0.0	0.0	4.5	48.9	37.5	86.4	7.6	0.1	0.0	0.0	0.0	0.1	0.0	0.1	98.6		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	1.2	0.0	0.0	0.0	0.0	0.0	1.2	5.2	0.4	5.6	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8.8		
R1-3	1.6	0.1	0.4	0.2	0.0	0.0	2.3	5.7	0.0	5.7	3.9	0.4	0.0	0.0	0.1	0.1	0.0	0.5	12.5		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	276.6	3.3	0.1	0.0	0.1	0.0	280.2	5.3	5.8	11.1	474.7	0.0	0.2	0.3	0.5	0.1	0.0	0.6	766.6		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	2,623.9	231.8	35.4	11.1	4.0	1.7	2,907.9	136.3	97.4	233.7	4,926.0	14.6	10.8	17.2	28.0	9.3	0.0	51.9	8,119.4		

(百万円)

[illegible]

(百万円)

[illegible]

表式-3		被害額（現況H29）				資産-10%				水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)	
災害 ブロック	一般資産被害額								農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対災費用			事業所における 応急対災費用	その他の間 接被害	小計	合計	備考	
	家屋	家屋用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働等 費	代替活動等 費			小計								
			償却	在庫	償却	在庫																	
L1	1,430.1	293.9	94.4	35.4	4.7	1.9	1,860.3	82.1	41.8	123.8	3,151.4	31.6	14.4	22.7	37.1	41.0	0.0	109.7	5,245.3				
L1-1	28.7	4.6	2.0	1.1	0.0	0.0	36.3	2.0	0.0	2.0	61.6	1.1	0.8	1.5	2.3	0.6	0.0	4.0	103.9				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	770.3	120.3	38.5	20.4	1.7	0.7	952.0	18.8	1.1	19.9	1,612.6	23.2	5.3	4.5	9.8	17.3	0.0	50.2	2,634.7				
L1-4	1,335.6	473.9	123.2	84.1	4.4	1.7	2,023.1	17.6	0.9	18.5	3,427.0	47.4	20.6	18.5	39.1	57.8	0.0	144.2	5,612.8				
L1-5	298.5	100.1	10.2	3.2	1.3	0.5	413.7	7.7	0.4	8.1	700.9	4.4	4.6	5.5	10.1	8.1	0.0	22.5	1,145.2				
L1-6	205.2	36.0	9.5	11.9	0.7	0.3	263.5	8.5	1.6	10.2	446.4	4.8	1.6	1.8	3.4	1.7	0.0	9.9	730.0				
L1-7	4.4	0.7	0.3	0.2	0.0	0.0	5.6	0.0	0.5	0.5	9.5	0.1	0.0	0.0	0.1	0.2	0.0	0.4	15.9				
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	135,827.2	48,036.8	28,018.0	10,398.8	34.6	12.5	222,327.9	18.5	4.3	22.8	376,623.4	11,127.7	2,392.6	1,655.9	4,048.6	9,072.1	0.0	24,248.4	623,222.6				
L5	13,786.5	4,591.5	2,281.7	1,260.8	6.8	2.7	21,930.0	15.0	4.9	19.9	37,149.4	815.0	210.5	199.1	409.5	527.4	0.0	1,751.9	60,851.2				
L6	27,271.0	6,157.5	2,077.8	882.7	22.5	9.1	36,420.5	89.7	48.4	138.1	61,696.4	575.4	271.4	268.7	540.1	393.3	0.0	1,508.8	99,763.8				
L7	16,323.5	3,692.6	1,806.6	919.1	9.7	4.0	22,755.5	26.0	7.3	33.3	38,547.8	564.9	170.0	193.1	363.1	310.5	0.0	1,238.5	62,575.1				
R1	1,243.5	160.4	80.0	17.1	4.0	1.6	1,506.7	93.8	64.5	158.3	2,552.4	31.2	8.8	13.9	22.8	18.2	0.0	72.1	4,289.5				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	694.4	276.3	10.2	2.7	5.3	2.3	991.3	16.4	1.6	18.0	1,679.2	4.7	12.6	12.1	24.7	10.5	0.0	39.9	2,728.4				
R1-3	151.9	108.7	5.9	4.7	2.2	0.8	274.2	7.1	0.0	7.1	464.4	3.5	4.6	4.3	8.9	4.7	0.0	17.2	762.9				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	308.6	101.6	5.8	3.5	1.0	0.4	420.9	9.1	1.3	10.4	713.0	2.1	4.6	5.3	9.9	7.1	0.0	19.1	1,163.5				
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	3,881.1	100.1	1.7	0.3	1.2	0.5	3,984.9	9.1	10.7	19.8	6,750.4	0.8	4.5	4.7	9.3	2.5	0.0	12.5	10,767.6				
R5	2,968.2	402.7	106.3	61.0	4.6	1.8	3,544.8	35.6	8.3	43.8	6,004.8	23.1	17.8	16.0	33.8	28.3	0.0	85.2	9,678.6				
R6	6,474.8	2,832.9	464.0	280.3	24.1	9.0	10,085.1	79.4	7.6	87.0	17,084.2	155.4	122.6	99.6	222.1	220.1	0.0	597.6	27,853.8				
R7	337.1	297.3	39.1	15.7	0.8	0.3	690.3	0.0	5.3	5.3	1,169.4	13.3	13.3	12.8	26.1	11.9	0.0	51.3	1,916.3				
R8	7,314.7	2,113.0	631.9	297.5	3.8	1.5	10,362.4	6.9	5.8	12.7	17,553.9	187.9	92.2	80.7	172.9	158.9	0.0	519.6	28,448.7				
HR2	10.8	9.2	2.1	1.4	0.1	0.0	113.6	2.8	0.0	2.8	192.4	1.0	0.6	1.1	1.8	0.7	0.0	3.4	312.2				
合計	220,756.2	69,910.2	35,809.2	14,301.8	133.4	51.9	340,962.6	546.1	216.2	762.3	577,590.7	13,618.5	3,373.4	2,621.9	5,995.2	10,892.6	0.0	30,506.3	949,821.9				

[illegible]

様式-3		被害額（当面整備H34） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/3			(百万円)			
地区ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対価	代替活動等	小計					
			償却	在庫	償却	在庫														
L1	16.1	0.0	0.6	0.1	0.0	0.0	16.8	13.8	11.9	25.7	28.5	0.3	0.0	0.0	0.0	0.4	0.0	0.7	71.6	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	0.1	0.0	0.0	0.0	0.0	0.0	0.1	24.7	21.1	45.8	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	46.0	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	16.1	0.0	0.6	0.1	0.0	0.0	16.9	38.4	33.1	71.5	28.6	0.3	0.0	0.0	0.0	0.4	0.0	0.7	117.6	

様式-3		被害額（当面整備H34） 資産-10%						水系名：由良川				河川名：由良川				流量規模： 1/5				(百万円)	
応急 ブロッ ク	一般資産被害額						農作物被害額				公共土木施 設等被害額	営業停止損 失	家屋における 応急対策費用			事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対 価	代替活動等	小計						
			償却	在庫	償却	在庫															
L1	43.8	0.0	1.8	0.3	0.1	0.0	46.1	35.9	24.0	59.9	78.1	0.7	0.0	0.0	0.0	0.9	0.0	1.6	185.7		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	5.0	0.0	0.2	0.0	0.0	0.0	5.2	52.7	40.7	93.4	8.9	0.1	0.0	0.0	0.0	0.1	0.0	0.2	107.6		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	48.9	0.0	2.0	0.4	0.1	0.0	51.3	88.6	64.7	153.3	86.9	0.8	0.0	0.0	0.0	1.0	0.0	1.8	293.4		

形式－3	被害額（当面整備H34）						資産－10%						水系名：由良川						河川名：由良川						流量規模：1/20				(百万円)	
	近基 ブロッ ク	一般資産被害額						農作物被害額						家屋における 応急対策費用						事業所における 応急対策費用		その他の関 連被害者		小計	合計	備考				
		事業所資産		農漁家資産		小計	水稲	畑作物	小計	公共土木基 設等被害額	営業停止損 失	清掃労働対 代	小計	小計	小計	小計	小計													
		家屋	家庭用品	備却	在庫													備却	在庫											
L1	202.8	1.2	7.5	1.9	0.2	0.1	213.7	59.4	39.0	98.4	362.0	2.5	0.2	0.3	0.5	4.4	0.0	7.3	681.4											
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L4	18,696.2	6,784.7	4,500.4	1,315.0	6.1	2.6	31,304.9	17.3	4.2	21.5	53,030.5	1,848.3	349.7	571.7	921.4	1,083.3	0.0	3,853.0	88,210.0											
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R1	105.6	0.2	7.9	1.1	0.3	0.1	115.3	83.9	60.4	144.3	195.2	2.4	0.0	0.0	0.1	0.9	0.0	3.4	458.2											
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R6	65.1	66.5	2.2	1.2	0.4	0.2	135.6	0.0	0.0	0.0	229.7	0.6	3.0	4.4	7.4	1.1	0.0	9.1	374.5											
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0										
合計	19,069.6	6,852.6	4,518.0	1,319.2	7.0	3.0	31,769.4	160.6	103.6	264.3	53,817.4	1,853.8	352.9	576.4	929.4	1,089.7	0.0	3,872.9	89,724.0											

様式－3		被害額（当面整備H34） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)			
河型 ブロック	一般資産被害額								農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用				事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	家屋における 応急対策費用												
			償却	在庫	償却	在庫					清掃労働対 価	代替活動等			小計								
L1	473.6	12.8	19.7	6.7	1.0	0.4	514.1	74.2	41.4	115.6	870.9	6.3	0.7	1.1	1.8	10.6	0.0	18.7	1,519.3				
L1-1	4.1	1.0	0.4	0.2	0.0	0.0	5.8	0.1	0.0	0.1	9.8	0.2	0.2	0.3	0.5	0.1	0.0	0.8	16.5				
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-7	1.2	0.1	0.1	0.0	0.0	0.0	1.4	0.0	0.1	0.1	2.4	0.1	0.0	0.0	0.0	0.1	0.0	0.2	4.1				
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	60,164.7	24,020.6	16,506.7	5,580.3	16.6	7.1	106,296.0	18.5	4.3	22.8	180,065.5	5,119.2	1,205.1	1,199.5	2,404.6	4,465.8	0.0	11,989.6	298,373.9				
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L6	19,834.5	3,980.8	1,567.3	607.1	15.3	6.3	26,011.3	104.4	52.3	156.7	44,063.2	410.8	184.5	211.4	395.9	254.1	0.0	1,060.7	71,291.9				
L7	13,307.9	2,706.1	1,231.5	617.9	7.6	3.0	17,874.0	25.8	7.5	33.3	30,278.6	419.4	128.3	153.4	281.7	228.6	0.0	929.7	49,115.7				
R1	377.9	2.0	20.2	4.6	0.7	0.3	405.7	89.7	64.2	153.9	687.3	6.0	0.1	0.2	0.3	3.1	0.0	9.4	1,256.2				
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R5	1,626.7	151.5	14.7	7.6	1.3	0.5	1,802.3	27.6	6.7	34.3	3,053.2	4.9	6.8	7.4	14.3	7.4	0.0	26.5	4,916.2				
R6	4,073.5	1,867.9	354.8	194.8	15.1	6.3	6,512.3	61.1	3.4	64.4	11,031.9	104.8	83.4	78.1	161.5	143.0	0.0	409.3	18,017.9				
R7	197.3	175.1	21.2	7.5	0.5	0.2	401.7	0.0	5.1	5.1	680.5	7.7	7.8	8.9	16.7	6.4	0.0	30.8	1,118.2				
R8	3,426.7	1,072.8	415.9	165.2	1.9	0.9	5,083.3	6.1	5.5	11.6	8,611.2	108.5	49.3	55.1	104.4	81.7	0.0	294.6	14,000.7				
R82	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	103,488.1	33,990.7	20,152.4	7,191.9	60.1	25.0	164,908.2	407.5	190.5	598.0	279,354.4	6,187.8	1,666.2	1,715.4	3,381.6	5,200.8	0.0	14,770.2	459,630.8				

様式－3		被害額（当面整備H34） 資産-10%					水系名：由良川				河川名：由良川				流量規模：1/100				(百万円)		
応急 ブロック	一般資産被害額						農作物被害額				公共土木 施設等被害額	営業停止損 失	家屋における 応急対策費用			事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対 価								
			償却	在庫	償却	在庫							清掃労働対 価	代替活動等	小計						
L1	1,389.7	259.6	81.5	28.3	5.7	2.3	1,767.2	84.0	41.8	125.9	2,993.6	25.4	11.8	20.0	31.8	36.5	0.0	93.7	4,980.4		
L1-1	20.8	3.2	1.4	0.8	0.0	0.0	26.1	2.0	0.0	2.0	44.2	0.8	0.5	1.0	1.6	0.4	0.0	2.8	75.1		
L1-2	184.4	75.3	11.0	0.5	1.1	0.5	272.8	2.5	1.7	4.2	462.1	5.0	3.3	3.2	6.5	4.0	0.0	15.5	754.7		
L1-3	845.7	129.8	40.5	21.3	1.8	0.7	1,039.9	20.5	1.4	21.9	1,761.6	25.0	5.7	4.8	10.4	18.2	0.0	53.6	2,877.1		
L1-4	1,591.6	570.3	140.0	97.1	5.3	2.1	2,406.3	17.6	0.9	18.5	4,076.3	53.9	25.2	20.9	46.1	66.4	0.0	166.4	6,667.6		
L1-5	399.6	134.4	12.2	4.1	1.6	0.7	552.6	7.8	0.4	8.2	936.1	5.8	6.0	6.4	12.4	10.9	0.0	29.1	1,526.0		
L1-6	304.8	54.9	12.6	17.6	1.0	0.4	391.3	15.2	2.7	18.0	682.9	7.2	2.6	2.6	5.2	2.7	0.0	15.1	1,087.2		
L1-7	361.2	40.1	7.7	5.3	0.1	0.0	414.4	19.9	1.0	20.9	701.9	2.3	2.1	2.3	4.4	2.9	0.0	9.6	1,146.7		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	133,446.8	47,607.7	27,846.5	10,304.7	33.8	12.2	219,251.8	19.0	4.4	23.4	371,412.5	10,850.3	2,365.3	1,646.8	4,012.1	9,018.6	0.0	23,881.0	614,568.8		
L5	9,736.2	3,211.3	1,766.0	881.4	4.7	2.1	15,601.6	14.4	4.4	18.8	26,429.0	591.5	149.2	164.0	313.2	367.9	0.0	1,272.7	43,322.0		
L6	28,469.9	6,276.8	2,098.5	893.0	22.2	8.9	37,769.3	108.8	53.0	161.7	63,981.3	580.6	277.1	273.2	550.3	396.5	0.0	1,527.4	103,439.7		
L7	16,229.5	3,664.7	1,797.5	914.8	9.7	4.0	22,620.1	26.1	7.3	33.4	38,318.5	561.4	168.3	191.8	360.0	308.0	0.0	1,229.3	62,201.3		
R1	1,385.2	207.1	75.4	18.0	5.6	2.2	1,693.6	97.4	65.4	162.9	2,868.9	31.9	9.5	16.1	25.6	17.3	0.0	74.8	4,800.1		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	1,048.7	395.5	10.5	2.8	8.2	3.2	1,469.0	23.1	2.2	25.3	2,488.5	5.0	17.1	15.4	32.4	11.2	0.0	48.7	4,031.4		
R1-3	192.1	130.6	6.2	4.9	2.5	1.0	337.3	8.4	0.0	8.4	571.4	3.7	5.7	5.2	10.9	5.3	0.0	19.9	937.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	442.8	160.1	9.0	5.4	1.7	0.7	619.6	9.2	1.3	10.5	1,049.6	3.8	7.5	8.6	16.1	11.7	0.0	31.7	1,711.4		
R1-6	285.0	46.3	0.4	0.3	1.0	0.4	333.3	10.2	4.0	14.2	564.6	0.3	2.2	2.8	5.0	0.7	0.0	6.0	918.1		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	5,681.8	352.8	5.3	1.3	5.0	1.9	6,048.1	12.2	4.7	17.0	10,245.5	2.5	15.7	13.3	28.9	8.7	0.0	40.2	16,350.7		
R5	2,406.8	260.4	42.9	22.4	2.6	1.1	2,736.2	30.6	6.9	37.5	4,635.2	10.3	11.5	11.3	22.8	15.1	0.0	48.2	7,457.0		
R6	5,686.8	2,518.3	435.7	257.8	21.3	8.3	8,928.2	76.3	6.5	82.9	15,124.4	136.6	109.9	93.6	203.5	192.0	0.0	532.1	24,667.5		
R7	335.8	294.2	38.4	15.5	0.8	0.3	685.1	0.0	5.3	5.3	1,160.6	13.2	13.2	12.7	25.9	11.8	0.0	50.9	1,901.9		
R8	7,313.9	2,112.4	631.8	297.5	3.8	1.5	10,360.9	6.9	5.8	12.7	17,551.3	187.9	92.2	80.7	172.8	158.8	0.0	519.5	28,444.4		
HR2	74.6	6.4	1.6	1.1	0.0	0.0	83.8	2.8	0.0	2.8	141.9	0.8	0.5	0.9	1.4	0.6	0.0	2.8	231.3		
合計	217,833.7	68,512.1	35,072.7	13,795.7	139.7	54.5	335,408.5	615.0	221.2	836.2	568,182.1	13,105.0	3,302.0	2,597.5	5,899.5	10,666.2	0.0	29,670.7	934,097.4		

[illegible]

様式-3		被害額（事業実施後H56） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/3				(百万円)	
地区 ブロック	一般資産被害額						農作物被害額				公共土木施設 等被害額	営業停止損 失	家屋における 応急対策費用			事業所にお ける応急対 策費用	その他の間 接被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対 価	代替活動等	小計						
			償却	在庫	償却	在庫															
L1	16.1	0.0	0.6	0.1	0.0	0.0	16.8	13.8	11.9	25.6	28.5	0.3	0.0	0.0	0.0	0.4	0.0	0.7	71.6		
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1	0.1	0.0	0.0	0.0	0.0	0.0	0.1	24.9	21.3	46.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	46.4		
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
合計	16.1	0.0	0.6	0.1	0.0	0.0	16.9	38.6	33.2	71.9	28.6	0.3	0.0	0.0	0.0	0.4	0.0	0.7	118.0		

様式-3		被害額（事業実施後H56） 資産-10%					水系名：由良川				河川名：由良川				流量規模：1/5				(百万円)	
地区 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対 価	代替活動等	小計					
			償却	在庫	償却	在庫														
L1	43.8	0.0	1.8	0.3	0.1	0.0	46.1	35.8	23.9	59.7	78.0	0.7	0.0	0.0	0.0	0.9	0.0	1.6	185.4	
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1	5.0	0.0	0.2	0.0	0.0	0.0	5.2	52.2	40.4	92.6	8.9	0.1	0.0	0.0	0.0	0.1	0.0	0.2	106.8	
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
R8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	48.8	0.0	2.0	0.4	0.1	0.0	51.3	88.0	64.3	152.3	86.9	0.8	0.0	0.0	0.0	1.0	0.0	1.8	292.2	

[illegible]

様式－3		被害額（事業実施後H56） 資産-10%					水系名：由良川				河川名：由良川				流量規模：1/50				(百万円)			
氾濫 ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計	合計	備考		
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計			清掃労働対 価	代替活動等	小計							
			償却	在庫	償却	在庫																
L1	473.5	12.7	19.7	6.7	1.0	0.4	514.1	73.9	41.4	115.3	870.9	6.3	0.7	1.1	1.8	10.6	0.0	18.6	1,518.9			
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L1-7	1.2	0.1	0.1	0.0	0.0	0.0	1.4	0.0	0.1	0.1	2.4	0.1	0.0	0.0	0.0	0.0	0.1	0.0	0.2	4.1		
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
L7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1	365.2	2.0	20.2	4.6	0.7	0.3	393.0	89.5	64.2	153.7	665.7	6.0	0.1	0.2	0.3	3.1	0.0	9.4	1,221.8			
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R1-6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
R8	900.6	237.3	104.1	32.6	0.6	0.2	1,275.4	2.3	1.4	3.7	2,160.5	39.1	12.8	22.6	35.3	18.0	0.0	92.4	3,531.9			
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	1,740.6	252.1	144.0	43.9	2.4	1.0	2,183.9	165.7	107.2	272.8	3,699.5	51.4	13.5	23.9	37.4	31.7	0.0	120.5	6,276.7			

様式－3		被害額（事業実施後H56）					資産-10%					水系名：由良川					河川名：由良川					流量規模：1/100					(百万円)		
氾濫 ブロック	一般資産被害額										農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考					
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対価	代替活動等	小計																
			償却	在庫	償却	在庫																							
L1	1,389.7	259.6	81.5	28.3	5.7	2.3	1,767.2	84.0	41.8	125.9	2,993.6	25.4	11.8	20.0	31.8	36.5	0.0	93.7	4,980.4										
L1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L1-2	184.4	75.3	11.0	0.5	1.1	0.5	272.8	2.5	1.7	4.2	482.1	5.0	3.3	3.2	6.5	4.0	0.0	15.5	754.7										
L1-3	845.7	129.8	40.5	21.3	1.8	0.7	1,039.9	20.6	1.4	21.9	1,761.6	25.0	5.7	4.8	10.4	18.2	0.0	53.6	2,877.1										
L1-4	1,591.6	570.3	140.0	97.1	5.3	2.1	2,406.3	17.6	0.9	18.5	4,076.3	53.9	25.2	20.9	46.1	66.4	0.0	166.4	6,667.6										
L1-5	399.6	134.4	12.2	4.1	1.6	0.7	552.6	7.8	0.4	8.2	936.1	5.8	6.0	6.4	12.4	10.9	0.0	29.1	1,526.0										
L1-6	304.8	54.9	12.6	17.6	1.0	0.4	391.3	15.2	2.7	18.0	662.9	7.2	2.6	2.6	5.2	2.7	0.0	15.1	1,087.2										
L1-7	361.2	40.1	7.7	5.3	0.1	0.0	414.4	19.9	1.0	20.9	701.9	2.3	2.1	2.3	4.4	2.9	0.0	9.6	1,146.7										
L1-8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
L4	88,773.1	35,374.5	21,776.6	7,834.4	24.8	9.5	153,793.1	18.9	4.3	23.2	260,525.5	7,199.2	1,721.4	1,430.2	3,151.6	6,659.2	0.0	17,010.0	431,351.8										
L5	9,736.2	3,211.3	1,766.0	881.4	4.7	2.1	15,601.6	14.3	4.4	18.7	26,429.0	591.5	149.2	164.0	313.2	367.9	0.0	1,272.7	43,322.0										
L6	16,472.8	1,474.0	570.2	115.4	10.3	4.4	18,647.0	103.8	54.1	158.0	31,588.1	130.9	67.3	98.1	165.5	78.7	0.0	375.0	50,768.1										
L7	11,168.9	2,387.1	977.5	468.8	4.4	1.8	15,008.5	32.6	9.7	42.3	25,424.4	383.6	124.1	165.9	290.0	172.6	0.0	846.2	41,321.5										
R1	1,378.6	205.7	75.4	18.0	5.6	2.2	1,685.5	97.4	65.4	162.8	2,855.3	31.9	9.4	15.9	25.4	17.2	0.0	74.4	4,778.1										
R1-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-2	1,048.7	395.5	10.5	2.8	8.2	3.2	1,469.0	23.1	2.2	25.3	2,488.5	5.0	17.1	15.4	32.4	11.2	0.0	48.7	4,031.4										
R1-3	192.1	130.6	6.2	4.9	2.5	1.0	337.3	8.4	0.0	8.4	571.4	3.7	5.7	5.2	10.9	5.3	0.0	19.9	937.0										
R1-4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R1-5	442.8	160.1	9.0	5.4	1.7	0.7	619.6	9.3	1.4	10.7	1,049.6	3.8	7.5	8.6	16.1	11.7	0.0	31.7	1,711.6										
R1-6	285.0	46.3	0.4	0.3	1.0	0.4	333.3	10.2	4.0	14.2	564.6	0.3	2.2	2.8	5.0	0.7	0.0	6.0	918.1										
R2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R4	5,681.8	352.8	5.3	1.3	5.0	1.9	6,048.1	12.2	4.7	16.9	10,245.5	2.5	15.7	13.3	28.9	8.7	0.0	40.2	16,350.7										
R5	2,351.3	242.3	30.7	16.2	2.4	0.9	2,643.9	28.4	6.6	35.0	4,478.8	8.3	10.6	10.3	20.9	13.2	0.0	42.4	7,200.2										
R6	3,485.1	1,480.4	283.7	142.2	11.9	5.3	5,408.5	83.2	6.2	89.4	9,161.9	81.9	65.5	70.8	136.2	106.2	0.0	324.4	14,984.2										
R7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
R8	4,775.4	1,378.8	489.7	205.3	2.4	1.1	6,852.8	6.6	5.9	12.5	11,608.6	132.9	62.1	65.4	127.4	104.6	0.0	365.0	18,838.8										
HR2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
合計	150,868.8	48,104.0	26,305.5	9,870.6	101.6	41.3	235,292.8	616.2	218.8	835.0	398,586.0	8,700.1	2,314.4	2,126.1	4,440.5	7,698.9	0.0	20,839.4	655,553.1										

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産-10%						水系名：由良川		河川名：由良川		流量規模：1/2		（百万円）									
地区ブロック	一般資産被害額										農作物被害額			家屋における応急対策費用				事業所における応急対策費用		その他の間接被害	小計	合計	備考
	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	清掃労働対価		代替活動等	小計									
	償却	在庫	償却	在庫																			
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産-10%						水系名：由良川		河川名：由良川						流量規模：1/3		（百万円）		
地区ブロック	一般資産被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計					
			償却	在庫	償却	在庫														
L4	324.8	59.9	44.5	15.5	0.1	0.0	444.8	6.7	1.8	8.5	753.4	28.7	6.0	11.2	17.2	13.7	0.0	59.6	1,266.3	
合計	324.8	59.9	44.5	15.5	0.1	0.0	444.8	6.7	1.8	8.5	753.4	28.7	6.0	11.2	17.2	13.7	0.0	59.6	1,266.3	

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産-10%								水系名：由良川		河川名：由良川		流量規模：1/5		（百万円）								
地区ブロック	一般資産被害額										農作物被害額			家屋における応急対策費用				事業所における応急対策費用		その他の間接被害		小計	合計	備考
	家屋	家庭用品	事業所資産				農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	清掃労働対価		代替活動等	小計	事業所における応急対策費用	その他の間接被害				
			償却	在庫	償却	在庫	小計	小計							小計									
L4	1,139.8	251.3	183.7	65.5	0.2	0.1	1,640.6	7.6	1.9	9.5	2,778.9	116.3	24.4	45.1	69.5	50.8	0.0	236.6	4,665.6					
合計	1,139.8	251.3	183.7	65.5	0.2	0.1	1,640.6	7.6	1.9	9.5	2,778.9	116.3	24.4	45.1	69.5	50.8	0.0	236.6	4,665.6					

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産-10%						水系名：由良川		河川名：由良川		流量規模：1/7		（百万円）						
地区ブロック	家屋	家庭用品	一般資産被害額				農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
			事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計					
			償却	在庫	償却	在庫														
L4	2,129.3	486.6	364.8	128.2	0.3	0.1	3,109.3	7.8	1.9	9.7	5,267.3	226.1	47.7	88.2	135.9	99.9	0.0	461.9	8,848.2	
合計	2,129.3	486.6	364.8	128.2	0.3	0.1	3,109.3	7.8	1.9	9.7	5,267.3	226.1	47.7	88.2	135.9	99.9	0.0	461.9	8,848.2	

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産-10%						水系名：由良川		河川名：由良川		流量規模：1/10		（百万円）						
地区ブロック	一般資産被害額										農作物被害額		家屋における応急対策費用							
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計					
L4	3,537.8	865.5	630.8	216.6	0.7	0.3	5,251.7	8.1	1.9	10.0	8,896.2	370.0	77.1	141.1	218.2	166.7	0.0	754.9	14,912.8	
合計	3,537.8	865.5	630.8	216.6	0.7	0.3	5,251.7	8.1	1.9	10.0	8,896.2	370.0	77.1	141.1	218.2	166.7	0.0	754.9	14,912.8	

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産-10%						水系名：由良川		河川名：由良川		流量規模：1/20		（百万円）								
地区ブロック	一般資産被害額										農作物被害額		公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等			小計							
			償却	在庫	償却	在庫																
L4	6,632.0	1,872.2	1,239.3	412.3	1.8	0.7	10,158.3	8.3	1.9	10.2	17,208.2	661.0	135.8	243.6	379.4	308.1	0.0	1,348.5	28,725.2			
合計	6,632.0	1,872.2	1,239.3	412.3	1.8	0.7	10,158.3	8.3	1.9	10.2	17,208.2	661.0	135.8	243.6	379.4	308.1	0.0	1,348.5	28,725.2			

様式-3		被害額（福知山市街地内水）（事業実施前H27） 資産-10%						水系名：由良川		河川名：由良川		流量規模：1/30		（百万円）							
地区ブロック	一般資産被害額										農作物被害額		公共土木施設等被害額	営業停止損失	家屋における応急対策費用		事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稲	畑作物	小計	清掃労働対価	代替活動等									
			償却	在庫	償却	在庫															
L4	8,640.4	2,612.0	1,684.1	555.6	2.6	1.0	13,495.7	8.6	1.9	10.5	22,861.7	858.6	174.9	307.9	482.8	411.8	0.0	1,753.2	38,121.1		
合計	8,640.4	2,612.0	1,684.1	555.6	2.6	1.0	13,495.7	8.6	1.9	10.5	22,861.7	858.6	174.9	307.9	482.8	411.8	0.0	1,753.2	38,121.1		

様式-3		被害額（福知山市街地内水）（現況H29） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/2			（百万円）			
地区ブロック	一般資産被害額						農作物被害額			家屋における応急対策費用			事業所における応急対策費用			その他の間接被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	清掃労働対価		代替活動等					小計
			償却	在庫	償却	在庫							小計							
L4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
合計	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

様式-3		被害額（福知山市街地内水）（現況H29） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/3				（百万円）			
地区ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	清掃労働対価	代替活動等	小計										
			償却	在庫	償却	在庫																	
L4	97.4	6.2	6.1	2.3	0.0	0.0	112.0	6.5	1.7	8.2	189.9	3.6	0.6	1.1	1.7	2.6	0.0	7.9	318.0				
合計	97.4	6.2	6.1	2.3	0.0	0.0	112.0	6.5	1.7	8.2	189.9	3.6	0.6	1.1	1.7	2.6	0.0	7.9	318.0				

様式-3		被害額（福知山市街地内水）（現況H29） 資産-10%							水系名：由良川			河川名：由良川			流量規模：1/5			（百万円）																																					
地区ブロック	一般資産被害額										農作物被害額			公共土木施設等被害額			営業停止損失			家屋における応急対策費用			事業所における応急対策費用			その他の間接被害			小計			合計			備考																				
	家屋		家庭用品		事業所資産		農漁家資産		小計			水稻																										畑作物			小計														
	償却		在庫		償却		在庫																																																
	L4		448.8		76.8		57.7		20.6		0.1		0.0		604.0			7.2			1.8			9.0			1,023.3			35.9			7.6			14.0			21.6			18.1			0.0			75.6			1,711.9				
合計		448.8		76.8		57.7		20.6		0.1		0.0		604.0			7.2			1.8			9.0			1,023.3			35.9			7.6			14.0			21.6			18.1			0.0			75.6			1,711.9					

様式-3		被害額（福知山市街地内水）（現況H29） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/7			（百万円）							
地区ブロック	一般資産被害額											農作物被害額			公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	家屋における応急対策費用													
			償却	在庫	償却	在庫					清掃労働対価	代替活動等	小計											
L4	1,192.9	233.2	192.0	68.0	0.2	0.1	1,686.4	7.6	1.9	9.5	2,856.7	124.9	25.7	47.7	73.4	55.0	0.0	253.3	4,805.9					
合計	1,192.9	233.2	192.0	68.0	0.2	0.1	1,686.4	7.6	1.9	9.5	2,856.7	124.9	25.7	47.7	73.4	55.0	0.0	253.3	4,805.9					

様式-3		被害額（福知山市街地内水）（現況H29） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/10			（百万円）			
地区 ブロック	一般資産被害額						農作物被害額			家屋における 応急対策費用						事業所における 応急対策費用			備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における 応急対策費用			事業所における 応急対策費用	その他の間 接被害	小計		合計
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計					
L4	2,274.5	464.7	395.9	137.4	0.3	0.1	3,272.9	8.0	1.9	9.9	5,544.4	251.9	51.1	95.5	146.6	109.9	0.0	508.4	9,335.6	
合計	2,274.5	464.7	395.9	137.4	0.3	0.1	3,272.9	8.0	1.9	9.9	5,544.4	251.9	51.1	95.5	146.6	109.9	0.0	508.4	9,335.6	

様式-3		被害額（福知山市街地内水）（現況H29） 資産-10%						水系名：由良川				河川名：由良川				流量規模：1/20				（百万円）		
地区ブロック	一般資産被害額										農作物被害額				家屋における応急対策費用							
	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用				事業所における応急対策費用	その他の間接被害	小計	合計	備考			
	償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計									
L4	5,188.5	1,329.7	949.4	315.4	1.3	0.5	7,784.8	8.2	1.9	10.1	13,187.4	531.8	107.1	195.8	302.9	241.3	0.0	1,076.0	22,058.3			
合計	5,188.5	1,329.7	949.4	315.4	1.3	0.5	7,784.8	8.2	1.9	10.1	13,187.4	531.8	107.1	195.8	302.9	241.3	0.0	1,076.0	22,058.3			

様式-3		被害額（福知山市街地内水）（現況H29）						資産-10%		水系名：由良川				河川名：由良川				流量規模：1/30				（百万円）	
地区ブロック	一般家屋被害額						農作物被害額				公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考			
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働対価	代替活動等	小計								
			償却	在庫	償却	在庫																	
L4	7,160.8	1,999.0	1,347.9	442.8	2.1	0.8	10,953.5	8.5	1.9	10.4	18,554.9	713.2	143.8	259.3	403.1	333.8	0.0	1,450.1	30,968.9				
合計	7,160.8	1,999.0	1,347.9	442.8	2.1	0.8	10,953.5	8.5	1.9	10.4	18,554.9	713.2	143.8	259.3	403.1	333.8	0.0	1,450.1	30,968.9				

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/2						（百万円）	
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
			L4	0.0	0.0	0.0							0.0	0.0	0.0						0.0
合計		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/3						（百万円）	
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
			L4	13.2	0.2	0.5							0.3	0.0	0.0						14.2
合計		13.2	0.2	0.5	0.3	0.0	0.0	14.2	5.4	1.2	6.6	23.8	0.3	0.0	0.0	0.0	0.3	0.0	0.6	45.2	

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/5						（百万円）	
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
			L4	67.2	2.0	2.5							1.3	0.0	0.0						73.0
合計		67.2	2.0	2.5	1.3	0.0	0.0	73.0	6.4	1.7	8.1	123.6	1.3	0.2	0.3	0.5	1.3	0.0	3.1	207.8	

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/7						（百万円）	
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
			L4	119.2	7.2	5.8							2.8	0.0	0.0						135.0
合計		119.2	7.2	5.8	2.8	0.0	0.0	135.0	6.7	1.8	8.5	228.7	2.7	0.4	0.8	1.2	2.9	0.0	6.8	379.0	

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/10						（百万円）	
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
			L4	272.2	25.4	21.7							9.4	0.0	0.0						328.7
合計		272.2	25.4	21.7	9.4	0.0	0.0	328.7	7.2	1.8	9.0	556.9	12.2	2.5	4.5	7.0	8.5	0.0	27.7	922.3	

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/20						（百万円）	
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
			L4	1,442.1	212.1	237.6							82.7	0.2	0.1						1,974.8
合計		1,442.1	212.1	237.6	82.7	0.2	0.1	1,974.8	7.8	1.9	9.7	3,345.3	155.0	29.8	56.3	86.1	70.4	0.0	311.5	5,641.3	

様式-3		被害額（福知山市街地内水）（事業実施後H32） 資産-10%						水系名：由良川			河川名：由良川			流量規模：1/30						（百万円）	
地区ブロック	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計	公共土木施設等被害額	営業停止損失	家屋における応急対策費用			事業所における応急対策費用	その他の間接被害	小計	合計	備考	
			償却	在庫	償却	在庫							清掃労働対価	代替活動等	小計						
			L4	2,680.2	497.0	478.9							159.0	0.5	0.2						3,815.8
合計		2,680.2	497.0	478.9	159.0	0.5	0.2	3,815.8	7.9	1.9	9.8	6,464.0	291.8	54.9	103.1	158.0	131.3	0.0	581.1	10,870.7	

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：事業実施前H15

事業名：事業全体 （事業実施前H15～現況H29） 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	36.1	21.0	15.1	7.6	0.500	3.8	3.8	
1/3	0.333	392.5	147.1	245.4	130.3	0.167	21.8	25.6	
1/5	0.200	4,061.5	9,015.8	-4,954.3	-2,354.5	0.133	-313.1	-287.5	
1/10	0.100	12,731.4	17,186.3	-4,454.9	-4,704.6	0.100	-470.5	-758.0	
1/20	0.050	162,504.5	164,328.5	-1,824.0	-3,139.5	0.050	-157.0	-915.0	
1/50	0.020	641,431.7	537,581.8	103,849.9	51,012.9	0.030	1,530.4	615.4	
1/100 (1/144)	0.010	1,210,280.8	1,051,968.1	158,312.7	131,081.3	0.013	1,711.3	2,326.7	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：現況H29

事業名：事業全体 （現況H29～当面整備H34） 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	21.0	20.5	0.5	0.3	0.500	0.2	0.2	
1/3	0.333	147.1	130.6	16.5	8.5	0.167	1.4	1.6	
1/5	0.200	9,015.8	325.8	8,690.0	4,353.3	0.133	579.0	580.6	
1/10	0.100	17,186.3	558.5	16,627.8	12,658.9	0.100	1,265.9	1,846.5	
1/20	0.050	164,328.5	99,263.0	65,065.5	40,846.7	0.050	2,042.3	3,888.8	
1/50	0.020	537,581.8	509,059.8	28,522.0	46,793.8	0.030	1,403.8	5,292.6	
1/100 (1/144)	0.010	1,051,968.1	1,034,589.3	17,378.8	22,950.4	0.013	299.6	5,592.2	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：当面整備H34

事業名：事業全体 （当面整備H34～事業実施後H56） 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	20.5	21.0	-0.5	-0.3	0.500	-0.2	-0.2	
1/3	0.333	130.6	131.0	-0.4	-0.5	0.167	-0.1	-0.3	
1/5	0.200	325.8	324.5	1.3	0.5	0.133	0.1	-0.2	
1/10	0.100	558.5	550.4	8.1	4.7	0.100	0.5	0.3	
1/20	0.050	99,263.0	1,259.0	98,004.0	49,006.1	0.050	2,450.3	2,450.6	
1/50	0.020	509,059.8	6,960.7	502,099.1	300,051.6	0.030	9,001.5	11,452.1	
1/100 (1/144)	0.010	1,034,589.3	726,076.9	308,512.4	405,305.8	0.013	5,291.5	16,743.6	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：法川・弘法J対象河道：

事業名：床上対策 （事業実施前H27～現況H29）

単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/2	0.500	0.0	0.0	0.0	—	—	—	0.0	
1/3	0.333	1,400.4	352.5	1,047.9	524.0	0.167	87.5	87.5	
1/5	0.200	5,157.6	1,893.8	3,263.8	2,155.9	0.133	286.7	374.2	
1/7	0.143	9,780.3	5,311.7	4,468.6	3,866.2	0.057	220.4	594.6	
1/10	0.100	16,485.9	10,316.5	6,169.4	5,319.0	0.043	228.7	823.3	
1/20	0.050	0.0	0.0	0.0	3,084.7	0.050	154.2	977.5	
1/30	0.033	0.0	0.0	0.0	0.0	0.017	0.0	977.5	

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：法川・弘法J対象河道：

事業名：床上対策 (現況H29～事業実施後H32) 単位：百万円

流量規模	超過確率	被 害 額			区間平均 被害額 ④	区間確率 ⑤	年平均 被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待 額	備考
		事業を実施 しない場合 ①	事業を実施 した場合 ②	軽減額 ③=①－②					
1/2	0.500	0.0	0.0	0.0	—	—	—	0.0	
1/3	0.333	352.5	50.1	302.4	151.2	0.167	25.3	25.3	
1/5	0.200	1,893.8	230.5	1,663.3	982.9	0.133	130.7	156.0	
1/7	0.143	5,311.7	420.4	4,891.3	3,277.3	0.057	186.8	342.8	
1/10	0.100	10,316.5	1,021.7	9,294.8	7,093.1	0.043	305.0	647.8	
1/20	0.050	0.0	0.0	0.0	4,647.4	0.050	232.4	880.2	
1/30	0.033	0.0	0.0	0.0	0.0	0.017	0.0	880.2	

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：事業実施前H15

事業名：事業全体 (事業実施前H15～現況H29) 資産+10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③=①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	39.7	23.1	16.6	8.3	0.500	4.2	4.2	
1/3	0.333	431.6	161.8	269.8	143.2	0.167	23.9	28.1	
1/5	0.200	4,466.8	9,912.2	-5,445.4	-2,587.8	0.133	-344.2	-316.1	
1/10	0.100	13,999.2	18,896.7	-4,897.5	-5,171.5	0.100	-517.2	-833.3	
1/20	0.050	178,245.8	180,272.1	-2,026.3	-3,461.9	0.050	-173.1	-1,006.4	
1/50	0.020	703,683.0	589,766.7	113,916.3	55,945.0	0.030	1,678.4	672.0	
1/100 (1/144)	0.010	1,327,907.4	1,154,114.3	173,793.1	143,854.7	0.013	1,878.1	2,550.1	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：現況H29

事業名：事業全体 (現況H29～当面整備H34) 資産+10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③=①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	23.1	22.6	0.5	0.3	0.500	0.2	0.2	
1/3	0.333	161.8	143.6	18.2	9.4	0.167	1.6	1.8	
1/5	0.200	9,912.2	358.2	9,554.0	4,786.1	0.133	636.6	638.4	
1/10	0.100	18,896.7	613.9	18,282.8	13,918.4	0.100	1,391.8	2,030.2	
1/20	0.050	180,272.1	108,802.0	71,470.1	44,876.5	0.050	2,243.8	4,274.0	
1/50	0.020	589,766.7	558,488.8	31,277.9	51,374.0	0.030	1,541.2	5,815.2	
1/100 (1/144)	0.010	1,154,114.3	1,135,081.2	19,033.1	25,155.5	0.013	328.4	6,143.6	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：当面整備H34

事業名：事業全体 (当面整備H34～事業実施後H56) 資産+10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③=①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	22.6	23.1	-0.5	-0.3	0.500	-0.2	-0.2	
1/3	0.333	143.6	144.0	-0.4	-0.5	0.167	-0.1	-0.3	
1/5	0.200	358.2	356.8	1.4	0.5	0.133	0.1	-0.2	
1/10	0.100	613.9	605.0	8.9	5.1	0.100	0.5	0.3	
1/20	0.050	108,802.0	1,383.8	107,418.2	53,713.6	0.050	2,685.7	2,686.0	
1/50	0.020	558,488.8	7,644.7	550,844.1	329,131.2	0.030	9,873.9	12,559.9	
1/100 (1/144)	0.010	1,135,081.2	796,600.6	338,480.6	444,662.4	0.013	5,805.3	18,365.2	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：法川・弘法J対象河道：

事業名：床上対策 (事業実施前H27～現況H29) 資産+10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③=①－②					
1/2	0.500	0.0	0.0	0.0	—	—	—	0.0	
1/3	0.333	1,534.4	387.0	1,147.4	573.7	0.167	95.8	95.8	
1/5	0.200	5,649.6	2,075.5	3,574.1	2,360.8	0.133	314.0	409.8	
1/7	0.143	10,711.9	5,817.4	4,894.5	4,234.3	0.057	241.4	651.2	
1/10	0.100	18,058.9	11,297.3	6,761.6	5,828.1	0.043	250.6	901.8	
1/20	0.050	0.0	0.0	0.0	3,380.8	0.050	169.0	1,070.8	
1/30	0.033	0.0	0.0	0.0	0.0	0.017	0.0	1,070.8	

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：法川・弘法J対象河道：

事業名：床上対策 (現況H29～事業実施後H32) 資産+10% 単位：百万円

流量規模	超過確率	被 害 額			区間平均 被害額 ④	区間確率 ⑤	年平均 被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待 額	備考
		事業を実施 しない場合 ①	事業を実施 した場合 ②	軽減額 ③=①－②					
1/2	0.500	0.0	0.0	0.0	—	—	—	0.0	
1/3	0.333	387.0	54.9	332.1	166.1	0.167	27.7	27.7	
1/5	0.200	2,075.5	253.2	1,822.3	1,077.2	0.133	143.3	171.0	
1/7	0.143	5,817.4	461.8	5,355.6	3,589.0	0.057	204.6	375.6	
1/10	0.100	11,297.3	1,121.1	10,176.2	7,765.9	0.043	333.9	709.5	
1/20	0.050	0.0	0.0	0.0	5,088.1	0.050	254.4	963.9	
1/30	0.033	0.0	0.0	0.0	0.0	0.017	0.0	963.9	

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：事業実施前H15

事業名：事業全体 （事業実施前H15～現況H29） 資産-10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	32.5	18.9	13.6	6.8	0.500	3.4	3.4	
1/3	0.333	353.5	132.5	221.0	117.3	0.167	19.6	23.0	
1/5	0.200	3,656.3	8,119.4	-4,463.1	-2,121.1	0.133	-282.1	-259.1	
1/10	0.100	11,463.7	15,475.8	-4,012.1	-4,237.6	0.100	-423.8	-682.9	
1/20	0.050	146,763.2	148,385.0	-1,621.8	-2,816.9	0.050	-140.8	-823.7	
1/50	0.020	579,180.3	485,397.0	93,783.3	46,080.8	0.030	1,382.4	558.7	
1/100 (1/144)	0.010	1,092,654.2	949,821.9	142,832.3	118,307.8	0.013	1,544.6	2,103.3	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：現況H29

事業名：事業全体 （現況H29～当面整備H34） 資産-10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	18.9	18.5	0.4	0.2	0.500	0.1	0.1	
1/3	0.333	132.5	117.6	14.9	7.7	0.167	1.3	1.4	
1/5	0.200	8,119.4	293.4	7,826.0	3,920.5	0.133	521.4	522.8	
1/10	0.100	15,475.8	503.0	14,972.8	11,399.4	0.100	1,139.9	1,662.7	
1/20	0.050	148,385.0	89,724.0	58,661.0	36,816.9	0.050	1,840.8	3,503.5	
1/50	0.020	485,397.0	459,630.8	25,766.2	42,213.6	0.030	1,266.4	4,769.9	
1/100 (1/144)	0.010	949,821.9	934,097.4	15,724.5	20,745.4	0.013	270.8	5,040.7	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：由良川 対象河道：当面整備H34

事業名：事業全体 （当面整備H34～事業実施後H56） 資産-10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③＝①－②					
1/1	1.000	0.0	0.0	0.0	—	—	—	0.0	
1/2	0.500	18.5	18.9	-0.4	-0.2	0.500	-0.1	-0.1	
1/3	0.333	117.6	118.0	-0.4	-0.4	0.167	-0.1	-0.2	
1/5	0.200	293.4	292.2	1.2	0.4	0.133	0.1	-0.1	
1/10	0.100	503.0	495.8	7.2	4.2	0.100	0.4	0.3	
1/20	0.050	89,724.0	1,134.1	88,589.9	44,298.6	0.050	2,214.9	2,215.2	
1/50	0.020	459,630.8	6,276.7	453,354.1	270,972.0	0.030	8,129.2	10,344.4	
1/100 (1/144)	0.010	934,097.4	655,553.1	278,544.3	365,949.2	0.013	4,777.7	15,122.1	※S28実績洪水は、基本方針においてこれを1/100と検証しているが、適合度が最も高い対数ピアソンⅢ型においては1/144と算出できる。

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：法川・弘法J対象河道：

事業名：床上対策 (事業実施前H27～現況H29) 資産-10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③=①－②					
1/2	0.500	0.0	0.0	0.0	—	—	—	0.0	
1/3	0.333	1,266.3	318.0	948.3	474.2	0.167	79.2	79.2	
1/5	0.200	4,665.6	1,711.9	2,953.7	1,951.0	0.133	259.5	338.7	
1/7	0.143	8,848.2	4,805.9	4,042.3	3,498.0	0.057	199.4	538.1	
1/10	0.100	14,912.8	9,335.6	5,577.2	4,809.8	0.043	206.8	744.9	
1/20	0.050	0.0	0.0	0.0	2,788.6	0.050	139.4	884.3	
1/30	0.033	0.0	0.0	0.0	0.0	0.017	0.0	884.3	

様式－４ 年平均被害軽減期待額 水系名：由良川 河川名：法川・弘法J対象河道：

事業名：床上対策 (現況H29～事業実施後H32) 資産-10% 単位：百万円

流量規模	超過確率	被害額			区間平均被害額 ④	区間確率 ⑤	年平均被害額 ④×⑤	年平均被害額の累計 =年平均被害軽減期待額	備考
		事業を実施しない場合 ①	事業を実施した場合 ②	軽減額 ③=①－②					
1/2	0.500	0.0	0.0	0.0	—	—	—	0.0	
1/3	0.333	318.0	45.2	272.8	136.4	0.167	22.8	22.8	
1/5	0.200	1,711.9	207.8	1,504.1	888.5	0.133	118.2	141.0	
1/7	0.143	4,805.9	379.0	4,426.9	2,965.5	0.057	169.0	310.0	
1/10	0.100	9,335.6	922.3	8,413.3	6,420.1	0.043	276.1	586.1	
1/20	0.050	0.0	0.0	0.0	4,206.7	0.050	210.3	796.4	
1/30	0.033	0.0	0.0	0.0	0.0	0.017	0.0	796.4	

様式－５ 費用対便益（全体事業）

水系名：由良川水系 河川名：由良川

表式-5 費用対便益（全体事業）					便 益（B）			水糸名：田良川水糸 河川名：田良川						単位：百万円		
年次	年度	t	割引率 4%	デフレーター （治水事業費 指数 （河川））	便益①		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④		費用便益比 B／C	純現在価値 B－C
					便益	現在価値			費用	現在価値	費用	現在価値	費用	現在価値		
整備期間（４１年）	H15	-13	1.665	99.1	0.0	0.0			2,005.3	3,652.2	0.0	0.0	2,005.3	3,652.2		
	H16	-12	1.601	99.5	79.0	126.5			5,823.5	10,157.4	422.9	737.6	6,246.4	10,895.0		
	H17	-11	1.539	100.0	179.1	275.6			2,870.0	4,788.0	399.9	667.1	3,269.9	5,455.1		
	H18	-10	1.480	101.1	258.5	382.6			4,065.5	6,451.4	452.6	718.2	4,518.1	7,169.6		
	H19	-9	1.423	102.7	347.8	494.9			6,486.6	9,742.7	474.5	712.7	6,961.1	10,455.4		
	H20	-8	1.369	105.8	519.2	710.8			7,315.0	10,260.3	420.9	590.4	7,735.9	10,850.7		
	H21	-7	1.316	102.5	681.6	897.0			5,711.7	7,949.3	433.3	603.0	6,145.0	8,552.3		
	H22	-6	1.265	102.6	765.5	968.4			6,623.1	8,851.8	326.4	436.2	6,949.5	9,288.0		
	H23	-5	1.217	104.7	844.4	1,027.6			6,779.4	8,542.1	872.4	1,099.2	7,651.8	9,641.3		
	H24	-4	1.170	103.0	891.1	1,042.6			13,022.8	16,035.5	553.8	681.9	13,576.6	16,717.4		
	H25	-3	1.125	105.4	1,024.0	1,152.0			8,501.7	9,836.6	363.5	420.6	8,865.2	10,257.2		
	H26	-2	1.082	108.4	1,129.4	1,222.0			8,713.2	9,427.7	293.4	317.5	9,006.6	9,745.2		
	H27	-1	1.040	108.4	1,287.2	1,338.7			10,163.3	10,569.8	372.8	387.7	10,536.1	10,957.5		
	H28	0	1.000	108.4	2,120.7	2,120.7			8,939.1	8,939.1	649.4	649.4	9,588.5	9,588.5		
	H29	1	0.962	108.4	3,304.2	3,178.6			11,937.9	11,484.3	309.3	297.5	12,247.2	11,781.8		
	H30	2	0.925	108.4	4,592.9	4,248.4			13,627.4	12,605.3	533.6	493.6	14,161.0	13,098.9		
	H31	3	0.889	108.4	6,662.7	5,923.1			8,759.0	7,786.8	585.7	520.7	9,344.7	8,307.5		
	H32	4	0.855	108.4	8,736.0	7,469.3			2,069.3	1,769.3	600.7	513.6	2,670.0	2,282.9		
	H33	5	0.822	108.4	9,419.4	7,742.7			914.2	751.5	197.0	161.9	1,111.2	913.4		
	H34	6	0.790	108.4	9,776.6	7,723.5			819.6	647.5	114.9	90.8	934.5	738.3		
	H35	7	0.760	108.4	11,701.7	8,893.3			819.6	622.9	101.8	77.4	921.4	700.3		
	H36	8	0.731	108.4	13,626.7	9,961.1			819.6	599.1	101.8	74.4	921.4	673.5		
	H37	9	0.703	108.4	15,551.8	10,932.9			819.6	576.2	101.8	71.6	921.4	647.8		
	H38	10	0.676	108.4	17,476.8	11,814.3			819.6	554.0	101.8	68.8	921.4	622.8		
	H39	11	0.650	108.4	19,401.8	12,611.2			819.6	532.7	101.8	66.2	921.4	598.9		
	H40	12	0.625	108.4	21,326.9	13,329.3			819.6	512.3	101.8	63.6	921.4	575.9		
	H41	13	0.601	108.4	23,252.9	13,975.0			741.3	445.5	101.8	61.2	843.1	506.7		
	H42	14	0.577	108.4	23,512.0	13,566.4			741.3	427.7	288.9	166.7	1,030.2	594.4		
	H43	15	0.555	108.4	23,771.2	13,193.0			741.3	411.4	288.9	160.3	1,030.2	571.7		
	H44	16	0.534	108.4	24,030.4	12,832.2			741.3	395.9	288.9	154.3	1,030.2	550.2		
	H45	17	0.513	108.4	24,289.5	12,460.5			741.3	380.3	288.9	148.2	1,030.2	528.5		
	H46	18	0.494	108.4	24,548.7	12,127.1			689.5	340.6	1,471.8	727.1	2,161.3	1,067.7		
	H47	19	0.475	108.4	24,789.8	11,775.2			689.5	327.5	284.8	135.3	974.3	462.8		
	H48	20	0.456	108.4	25,030.8	11,414.0			689.5	314.4	284.8	129.9	974.3	444.3		
	H49	21	0.439	108.4	25,271.9	11,094.4			689.5	302.7	284.8	125.0	974.3	427.7		
	H50	22	0.422	108.4	25,513.0	10,766.5			689.5	291.0	284.8	120.2	974.3	411.2		
	H51	23	0.406	108.4	25,754.0	10,456.1			438.3	177.9	284.8	115.6	723.1	293.5		
	H52	24	0.390	108.4	25,907.3	10,103.8			438.3	170.9	264.9	103.3	703.2	274.2		
	H53	25	0.375	108.4	26,060.5	9,772.7			438.3	164.4	264.9	99.3	703.2	263.7		
	H54	26	0.361	108.4	26,213.7	9,463.1			438.3	158.2	264.9	95.6	703.2	253.8		
	H55	27	0.347	108.4	26,367.0	9,149.3			438.3	152.1	264.9	91.9	703.2	244.0		
施設完成後の 評価期間（５０年）	H56	28	0.333		26,520.2	8,831.2					264.9	88.2	264.9	88.2		
	H57	29	0.321		26,520.2	8,513.0					340.1	109.2	340.1	109.2		
	H58	30	0.308		26,520.2	8,168.2					340.1	104.8	340.1	104.8		
	H59	31	0.296		26,520.2	7,850.0					340.1	100.7	340.1	100.7		
	H60	32	0.285		26,520.2	7,558.3					340.1	96.9	340.1	96.9		
	H61	33	0.274		26,520.2	7,266.5					1,523.0	417.3	1,523.0	417.3		
	H62	34	0.264		26,520.2	7,001.3					340.1	89.8	340.1	89.8		
	H63	35	0.253		26,520.2	6,709.6					340.1	86.0	340.1	86.0		
	H64	36	0.244		26,520.2	6,470.9					340.1	83.0	340.1	83.0		
	H65	37	0.234		26,520.2	6,205.7					340.1	79.6	340.1	79.6		
	H66	38	0.225		26,520.2	5,967.0					340.1	76.5	340.1	76.5		
	H67	39	0.217		26,520.2	5,754.9					340.1	73.8	340.1	73.8		
	H68	40	0.208		26,520.2	5,516.2					340.1	70.7	340.1	70.7		
	H69	41	0.200		26,520.2	5,304.0					340.1	68.0	340.1	68.0		
	H70	42	0.193		26,520.2	5,118.4					340.1	65.6	340.1	65.6		
	H71	43	0.185		26,520.2	4,906.2					340.1	62.9	340.1	62.9		
	H72	44	0.178		26,520.2	4,720.6					340.1	60.5	340.1	60.5		
	H73	45	0.171		26,520.2	4,535.0					340.1	58.2	340.1	58.2		
	H74	46	0.165		26,520.2	4,375.8					340.1	56.1	340.1	56.1		
	H75	47	0.158		26,520.2	4,190.2					340.1	53.7	340.1	53.7		
	H76	48	0.152		26,520.2	4,031.1					1,523.0	231.5	1,523.0	231.5		
	H77	49	0.146		26,520.2	3,871.9					340.1	49.7	340.1	49.7		
	H78	50	0.141		26,520.2	3,739.3					340.1	48.0	340.1	48.0		
	H79	51	0.135		26,520.2	3,580.2					340.1	45.9	340.1	45.9		
	H80	52	0.130		26,520.2	3,447.6					340.1	44.2	340.1	44.2		
	H81	53	0.125		26,520.2	3,315.0					340.1	42.5	340.1	42.5		
	H82	54	0.120		26,520.2	3,182.4					340.1	40.8	340.1	40.8		
	H83	55	0.116		26,520.2	3,076.3					340.1	39.5	340.1	39.5		
	H84	56	0.111		26,520.2	2,943.7					340.1	37.8	340.1	37.8		
	H85	57	0.107		26,520.2	2,837.7					340.1	36.4	340.1	36.4		
	H86	58	0.103		26,520.2	2,731.6					340.1	35.0	340.1	35.0		
	H87	59	0.099		26,520.2	2,625.5					340.1	33.7	340.1	33.7		
	H88	60	0.095		26,520.2	2,519.4					340.1	32.3	340.1	32.3		
	H89	61	0.091		26,520.2	2,413.3					340.1	30.9	340.1	30.9		
	H90	62	0.088		26,520.2	2,333.8					340.1	29.9	340.1	29.9		
	H91	63	0.085		26,520.2	2,254.2					1,523.0	129.5	1,523.0	129.5		
	H92	64	0.081		26,520.2	2,148.1</										

事業費： 154,650

単位：百万円

様式－５ 費用対便益（全体事業・残事業費+10%）

水系名：由良川水系 河川名：由良川

年次		年度	t	割引率 4%	デフレーター (治水事業費 指数 (河川))	便 益 (B)		残存価値 (2)	計 (1)+(2)	費 用 (C)				費用便益比 B/C	純現在価値 B-C		
						便益①	現在価値			建設費③	維持管理費④		計③+④				
						便益	現在価値			費用	現在価値	費用	現在価値	費用	現在価値		
整備期間 (41年)	H15	-13	1.665	99.1	0.0	0.0				2,005.3	3,652.2	0.0	0.0	2,005.3	3,652.2		
	H16	-12	1.601	99.5	79.0	126.5				5,823.5	10,157.4	422.9	737.6	6,246.4	10,895.0		
	H17	-11	1.539	100.0	179.1	275.6				2,870.0	4,788.0	399.9	667.1	3,269.9	5,455.1		
	H18	-10	1.480	101.1	258.5	382.6				4,065.5	6,451.4	452.6	718.2	4,518.1	7,169.6		
	H19	-9	1.423	102.7	347.8	494.9				6,486.6	9,742.7	474.5	712.7	6,961.1	10,455.4		
	H20	-8	1.369	105.8	519.2	710.8				7,315.0	10,260.3	420.9	590.4	7,735.9	10,850.7		
	H21	-7	1.316	102.5	681.6	897.0				5,711.7	7,949.3	433.3	603.0	6,145.0	8,552.3		
	H22	-6	1.265	102.6	765.5	968.4				6,623.1	8,851.8	326.4	436.2	6,949.5	9,288.0		
	H23	-5	1.217	104.7	844.4	1,027.6				6,779.4	8,542.1	872.4	1,099.2	7,651.8	9,641.3		
	H24	-4	1.170	103.0	891.1	1,042.6				13,022.8	16,035.5	553.8	681.9	13,576.6	16,717.4		
	H25	-3	1.125	105.4	1,024.0	1,152.0				8,501.7	9,836.6	363.5	420.6	8,865.2	10,257.2		
	H26	-2	1.082	108.4	1,129.4	1,222.0				8,713.2	9,427.7	293.4	317.5	9,006.6	9,745.2		
	H27	-1	1.040	108.4	1,287.2	1,338.7				10,163.3	10,569.8	372.8	387.7	10,536.1	10,957.5		
	H28	0	1.000	108.4	2,120.7	2,120.7				8,939.1	8,939.1	649.4	649.4	9,588.5	9,588.5		
	H29	1	0.962	108.4	3,304.2	3,178.6				13,131.7	12,632.7	309.3	297.5	13,441.0	12,930.2		
	H30	2	0.925	108.4	4,592.9	4,248.4				14,990.1	13,865.9	533.6	493.6	15,523.7	14,359.5		
	H31	3	0.889	108.4	6,662.7	5,923.1				9,634.9	8,565.4	585.7	520.7	10,220.6	9,086.1		
	H32	4	0.855	108.4	8,736.0	7,469.3				2,276.2	1,946.2	600.7	513.6	2,876.9	2,459.8		
	H33	5	0.822	108.4	9,419.4	7,742.7				1,005.6	826.6	197.0	161.9	1,202.6	988.5		
	H34	6	0.790	108.4	9,776.6	7,723.5				901.6	712.2	114.9	90.8	1,016.5	803.0		
	H35	7	0.760	108.4	11,701.7	8,893.3				901.6	685.2	101.8	77.4	1,003.4	762.6		
	H36	8	0.731	108.4	13,626.7	9,961.1				901.6	659.0	101.8	74.4	1,003.4	733.4		
	H37	9	0.703	108.4	15,551.8	10,932.9				901.6	633.8	101.8	71.6	1,003.4	705.4		
	H38	10	0.676	108.4	17,476.8	11,814.3				901.6	609.5	101.8	68.8	1,003.4	678.3		
	H39	11	0.650	108.4	19,401.8	12,611.2				901.6	586.0	101.8	66.2	1,003.4	652.2		
	H40	12	0.625	108.4	21,326.9	13,329.3				901.6	563.5	101.8	63.6	1,003.4	627.1		
	H41	13	0.601	108.4	23,252.9	13,975.0				815.4	490.1	101.8	61.2	917.2	551.3		
	H42	14	0.577	108.4	23,512.0	13,566.4				815.4	470.5	288.9	166.7	1,104.3	637.2		
	H43	15	0.555	108.4	23,771.2	13,193.0				815.4	452.6	288.9	160.3	1,104.3	612.9		
	H44	16	0.534	108.4	24,030.4	12,832.2				815.4	435.4	288.9	154.3	1,104.3	589.7		
	H45	17	0.513	108.4	24,289.5	12,460.5				815.4	418.3	288.9	148.2	1,104.3	566.5		
	H46	18	0.494	108.4	24,548.7	12,127.1				758.5	374.7	1,471.8	727.1	2,230.3	1,101.8		
	H47	19	0.475	108.4	24,789.8	11,775.2				758.5	360.3	284.8	135.3	1,043.3	495.6		
	H48	20	0.456	108.4	25,030.8	11,414.0				758.5	345.9	284.8	129.9	1,043.3	475.8		
	H49	21	0.439	108.4	25,271.9	11,094.4				758.5	333.0	284.8	125.0	1,043.3	458.0		
H50	22	0.422	108.4	25,513.0	10,766.5				758.5	320.1	284.8	120.2	1,043.3	440.3			
H51	23	0.406	108.4	25,754.0	10,456.1				482.1	195.7	284.8	115.6	766.9	311.3			
H52	24	0.390	108.4	25,907.3	10,103.8				482.1	188.0	264.9	103.3	747.0	291.3			
H53	25	0.375	108.4	26,060.5	9,772.7				482.1	180.8	264.9	99.3	747.0	280.1			
H54	26	0.361	108.4	26,213.7	9,463.1				482.1	174.0	264.9	95.6	747.0	269.6			
H55	27	0.347	108.4	26,367.0	9,149.3				482.1	167.3	264.9	91.9	747.0	259.2			
施設完成後の 評価期間 (50年)	H56	28	0.333		26,520.2	8,831.2						264.9	88.2	264.9	88.2		
	H57	29	0.321		26,520.2	8,513.0						340.1	109.2	340.1	109.2		
	H58	30	0.308		26,520.2	8,168.2						340.1	104.8	340.1	104.8		
	H59	31	0.296		26,520.2	7,850.0						340.1	100.7	340.1	100.7		
	H60	32	0.285		26,520.2	7,558.3						340.1	96.9	340.1	96.9		
	H61	33	0.274		26,520.2	7,266.5						1,523.0	417.3	1,523.0	417.3		
	H62	34	0.264		26,520.2	7,001.3						340.1	89.8	340.1	89.8		
	H63	35	0.253		26,520.2	6,709.6						340.1	86.0	340.1	86.0		
	H64	36	0.244		26,520.2	6,470.9						340.1	83.0	340.1	83.0		
	H65	37	0.234		26,520.2	6,205.7						340.1	79.6	340.1	79.6		
	H66	38	0.225		26,520.2	5,967.0						340.1	76.5	340.1	76.5		
	H67	39	0.217		26,520.2	5,754.9						340.1	73.8	340.1	73.8		
	H68	40	0.208		26,520.2	5,516.2						340.1	70.7	340.1	70.7		
	H69	41	0.200		26,520.2	5,304.0						340.1	68.0	340.1	68.0		
	H70	42	0.193		26,520.2	5,118.4						340.1	65.6	340.1	65.6		
	H71	43	0.185		26,520.2	4,906.2						340.1	62.9	340.1	62.9		
	H72	44	0.178		26,520.2	4,720.6						340.1	60.5	340.1	60.5		
	H73	45	0.171		26,520.2	4,535.0						340.1	58.2	340.1	58.2		
	H74	46	0.165		26,520.2	4,375.8						340.1	56.1	340.1	56.1		
	H75	47	0.158		26,520.2	4,190.2						340.1	53.7	340.1	53.7		
	H76	48	0.152		26,520.2	4,031.1						1,523.0	231.5	1,523.0	231.5		
	H77	49	0.146		26,520.2	3,871.9						340.1	49.7	340.1	49.7		
	H78	50	0.141		26,520.2	3,739.3						340.1	48.0	340.1	48.0		
	H79	51	0.135		26,520.2	3,580.2						340.1	45.9	340.1	45.9		
	H80	52	0.130		26,520.2	3,447.6						340.1	44.2	340.1	44.2		
	H81	53	0.125		26,520.2	3,315.0						340.1	42.5	340.1	42.5		
	H82	54	0.120		26,520.2	3,182.4						340.1	40.8	340.1	40.8		
	H83	55	0.116		26,520.2	3,076.3						340.1	39.5	340.1	39.5		
	H84	56	0.111		26,520.2	2,943.7						340.1	37.8	340.1	37.8		
	H85	57	0.107		26,520.2	2,837.7						340.1	36.4	340.1	36.4		
	H86	58	0.103		26,520.2	2,731.6						340.1	35.0	340.1	35.0		
	H87	59	0.099		26,520.2	2,625.5						340.1	33.7	340.1	33.7		
	H88	60	0.095		26,520.2	2,519.4						340.1	32.3	340.1	32.3		
	H89	61	0.091		26,520.2	2,413.3						340.1					

事業費： 144,172
単位：百万円

様式－５ 費用対便益（全体事業・残事業費-10%）

水系名：由良川水系 河川名：由良川

年次	年度	t	便 益 (B)		残存価値 (2)	計 ①+②	費 用 (C)						費用便益比 B/C	純現在価値 B-C
			割引率 4%	(治水事業費 指数 (河川))			建設費③		維持管理費④		計③+④			
							費用	現在価値	費用	現在価値	費用	現在価値		
整備期間 (41年)	H15	-13	1.665	99.1	0.0	0.0	2,005.3	3,652.2	0.0	0.0	2,005.3	3,652.2		
	H16	-12	1.601	99.5	79.0	126.5	5,823.5	10,157.4	422.9	737.6	6,246.4	10,895.0		
	H17	-11	1.539	100.0	179.1	275.6	2,870.0	4,788.0	399.9	667.1	3,269.9	5,455.1		
	H18	-10	1.480	101.1	258.5	382.6	4,065.5	6,451.4	452.6	718.2	4,518.1	7,169.6		
	H19	-9	1.423	102.7	347.8	494.9	6,486.6	9,742.7	474.5	712.7	6,961.1	10,455.4		
	H20	-8	1.369	105.8	519.2	710.8	7,315.0	10,260.3	420.9	590.4	7,735.9	10,850.7		
	H21	-7	1.316	102.5	681.6	897.0	5,711.7	7,949.3	433.3	603.0	6,145.0	8,552.3		
	H22	-6	1.265	102.6	765.5	968.4	6,623.1	8,851.8	326.4	436.2	6,949.5	9,288.0		
	H23	-5	1.217	104.7	844.4	1,027.6	6,779.4	8,542.1	872.4	1,099.2	7,651.8	9,641.3		
	H24	-4	1.170	103.0	891.1	1,042.6	13,022.8	16,035.5	553.8	681.9	13,576.6	16,717.4		
	H25	-3	1.125	105.4	1,024.0	1,152.0	8,501.7	9,836.6	363.5	420.6	8,865.2	10,257.2		
	H26	-2	1.082	108.4	1,129.4	1,222.0	8,713.2	9,427.7	293.4	317.5	9,006.6	9,745.2		
	H27	-1	1.040	108.4	1,287.2	1,338.7	10,163.3	10,569.8	372.8	387.7	10,536.1	10,957.5		
	H28	0	1.000	108.4	2,120.7	2,120.7	8,939.1	8,939.1	649.4	649.4	9,588.5	9,588.5		
	H29	1	0.962	108.4	3,304.2	3,178.6	10,744.1	10,335.8	309.3	297.5	11,053.4	10,633.3		
	H30	2	0.925	108.4	4,592.9	4,248.4	12,264.7	11,344.8	533.6	493.6	12,798.3	11,838.4		
	H31	3	0.889	108.4	6,662.7	5,923.1	7,883.1	7,008.1	585.7	520.7	8,468.8	7,528.8		
	H32	4	0.855	108.4	8,736.0	7,469.3	1,862.4	1,592.3	600.7	513.6	2,463.1	2,105.9		
	H33	5	0.822	108.4	9,419.4	7,742.7	822.8	676.3	197.0	161.9	1,019.8	838.2		
	H34	6	0.790	108.4	9,776.6	7,723.5	737.6	582.7	114.9	90.8	852.5	673.5		
	H35	7	0.760	108.4	11,701.7	8,893.3	737.6	560.6	101.8	77.4	839.4	638.0		
	H36	8	0.731	108.4	13,626.7	9,961.1	737.6	539.2	101.8	74.4	839.4	613.6		
	H37	9	0.703	108.4	15,551.8	10,932.9	737.6	518.6	101.8	71.6	839.4	590.2		
	H38	10	0.676	108.4	17,476.8	11,814.3	737.6	498.6	101.8	68.8	839.4	567.4		
	H39	11	0.650	108.4	19,401.8	12,611.2	737.6	479.5	101.8	66.2	839.4	545.7		
	H40	12	0.625	108.4	21,326.9	13,329.3	737.6	461.0	101.8	63.6	839.4	524.6		
	H41	13	0.601	108.4	23,252.9	13,975.0	667.2	401.0	101.8	61.2	769.0	462.2		
H42	14	0.577	108.4	23,512.0	13,566.4	667.2	385.0	288.9	166.7	956.1	551.7			
H43	15	0.555	108.4	23,771.2	13,193.0	667.2	370.3	288.9	160.3	956.1	530.6			
H44	16	0.534	108.4	24,030.4	12,832.2	667.2	356.3	288.9	154.3	956.1	510.6			
H45	17	0.513	108.4	24,289.5	12,460.5	667.2	342.3	288.9	148.2	956.1	490.5			
H46	18	0.494	108.4	24,548.7	12,127.1	620.6	306.6	1,471.8	727.1	2,092.4	1,033.7			
H47	19	0.475	108.4	24,789.8	11,775.2	620.6	294.8	284.8	135.3	905.4	430.1			
H48	20	0.456	108.4	25,030.8	11,414.0	620.6	283.0	284.8	129.9	905.4	412.9			
H49	21	0.439	108.4	25,271.9	11,094.4	620.6	272.4	284.8	125.0	905.4	397.4			
H50	22	0.422	108.4	25,513.0	10,766.5	620.6	261.9	284.8	120.2	905.4	382.1			
H51	23	0.406	108.4	25,754.0	10,456.1	394.5	160.2	284.8	115.6	679.3	275.8			
H52	24	0.390	108.4	25,907.3	10,103.8	394.5	153.8	264.9	103.3	659.4	257.1			
H53	25	0.375	108.4	26,060.5	9,772.7	394.5	147.9	264.9	99.3	659.4	247.2			
H54	26	0.361	108.4	26,213.7	9,463.1	394.5	142.4	264.9	95.6	659.4	238.0			
H55	27	0.347	108.4	26,367.0	9,149.3	394.5	136.9	264.9	91.9	659.4	228.8			
施設完成後の 評価期間 (50年)	H56	28	0.333		26,520.2	8,831.2			264.9	88.2	264.9	88.2		
	H57	29	0.321		26,520.2	8,513.0			340.1	109.2	340.1	109.2		
	H58	30	0.308		26,520.2	8,168.2			340.1	104.8	340.1	104.8		
	H59	31	0.296		26,520.2	7,850.0			340.1	100.7	340.1	100.7		
	H60	32	0.285		26,520.2	7,558.3			340.1	96.9	340.1	96.9		
	H61	33	0.274		26,520.2	7,266.5			1,523.0	417.3	1,523.0	417.3		
	H62	34	0.264		26,520.2	7,001.3			340.1	89.8	340.1	89.8		
	H63	35	0.253		26,520.2	6,709.6			340.1	86.0	340.1	86.0		
	H64	36	0.244		26,520.2	6,470.9			340.1	83.0	340.1	83.0		
	H65	37	0.234		26,520.2	6,205.7			340.1	79.6	340.1	79.6		
	H66	38	0.225		26,520.2	5,967.0			340.1	76.5	340.1	76.5		
	H67	39	0.217		26,520.2	5,754.9			340.1	73.8	340.1	73.8		
	H68	40	0.208		26,520.2	5,516.2			340.1	70.7	340.1	70.7		
	H69	41	0.200		26,520.2	5,304.0			340.1	68.0	340.1	68.0		
	H70	42	0.193		26,520.2	5,118.4			340.1	65.6	340.1	65.6		
	H71	43	0.185		26,520.2	4,906.2			340.1	62.9	340.1	62.9		
	H72	44	0.178		26,520.2	4,720.6			340.1	60.5	340.1	60.5		
	H73	45	0.171		26,520.2	4,535.0			340.1	58.2	340.1	58.2		
	H74	46	0.165		26,520.2	4,375.8			340.1	56.1	340.1	56.1		
	H75	47	0.158		26,520.2	4,190.2			340.1	53.7	340.1	53.7		
	H76	48	0.152		26,520.2	4,031.1			1,523.0	231.5	1,523.0	231.5		
	H77	49	0.146		26,520.2	3,871.9			340.1	49.7	340.1	49.7		
	H78	50	0.141		26,520.2	3,739.3			340.1	48.0	340.1	48.0		
	H79	51	0.135		26,520.2	3,580.2			340.1	45.9	340.1	45.9		
	H80	52	0.130		26,520.2	3,447.6			340.1	44.2	340.1	44.2		
	H81	53	0.125		26,520.2	3,315.0			340.1	42.5	340.1	42.5		
	H82	54	0.120		26,520.2	3,182.4			340.1	40.8	340.1	40.8		
	H83	55	0.116		26,520.2	3,076.3			340.1	39.5	340.1	39.5		
	H84	56	0.111		26,520.2	2,943.7			340.1	37.8	340.1	37.8		
	H85	57	0.107		26,520.2	2,837.7			340.1	36.4	340.1	36.4		
	H86	58	0.103		26,520.2	2,731.6			340.1	35.0	340.1	35.0		
	H87	59	0.099		26,520.2	2,625.5			340.1	33.7	340.1	33.7		
	H88	60	0.095		26,520.2	2,519.4			340.1	32.3	340.1	32.3		
	H89	61	0.091		26,520.2	2,413.3			340.1	30.9	340.1	30.9		
	H90	62	0.088		26,520.2	2,333.8			340.1	29.9	340.1	29.9		
	H91	63	0.085		26,520.2	2,254.2			1,523.0	129.5	1,523.0	129.5		
	H92	64	0.081		26,520.2	2,148.1			340.1	27.5	340.1	27.5		
	H93	65	0.078		26,520.2	2,068.6			340.1	26.5	340.1	26.5		
	H94	66	0.075		26,520.2	1,989.0			340.1	25.5	340.1	25.5		
	H95	67	0.072		26,520.2	1,909.5			340.1	24.5	340.1	24.5		
	H96	68	0.069		26,520.2	1,829.9			340.1	23.5	340.1	23.5		
	H97	69	0.067		26,520.2	1,776.9			340.1	22.8	340.1	22.8		
	H98	70	0.064		26,520.2	1,697.3			340.1	21.8	340.1	21.8		
	H99	71	0.062											

事業費： 149,412
単位：百万円

様式－５ 費用対便益（全体事業・残工期+10%）

水系名：由良川水系 河川名：由良川

表式 5 費用対便益（主体事業・残土期+10%）					小糸石：由良川小糸 河川石：由良川										単位：百万円	
年次	年度	t	割引率 4%	デフレーター （治水事業費 指数 （河川））	便 益 (B)		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④		費用便益比 B/C	純現在価値 B－C
					便益①	現在価値			費用	現在価値	費用	現在価値	費用	現在価値		
整備期間 （44年）	H15	-13	1.665	99.1	0.0	0.0			2,005.3	3,652.2	0.0	0.0	2,005.3	3,652.2		
	H16	-12	1.601	99.5	79.0	126.5			5,823.5	10,157.4	422.9	737.6	6,246.4	10,895.0		
	H17	-11	1.539	100.0	179.1	275.6			2,870.0	4,788.0	399.9	667.1	3,269.9	5,455.1		
	H18	-10	1.480	101.1	258.5	382.6			4,065.5	6,451.4	452.6	718.2	4,518.1	7,169.6		
	H19	-9	1.423	102.7	347.8	494.9			6,486.6	9,742.7	474.5	712.7	6,961.1	10,455.4		
	H20	-8	1.369	105.8	519.2	710.8			7,315.0	10,260.3	420.9	590.4	7,735.9	10,850.7		
	H21	-7	1.316	102.5	681.6	897.0			5,711.7	7,949.3	433.3	603.0	6,145.0	8,552.3		
	H22	-6	1.265	102.6	765.5	968.4			6,623.1	8,851.8	326.4	436.2	6,949.5	9,288.0		
	H23	-5	1.217	104.7	844.4	1,027.6			6,779.4	8,542.1	872.4	1,099.2	7,651.8	9,641.3		
	H24	-4	1.170	103.0	891.1	1,042.6			13,022.8	16,035.5	553.8	681.9	13,576.6	16,717.4		
	H25	-3	1.125	105.4	1,024.0	1,152.0			8,501.7	9,836.6	363.5	420.6	8,865.2	10,257.2		
	H26	-2	1.082	108.4	1,129.4	1,222.0			8,713.2	9,427.7	293.4	317.5	9,006.6	9,745.2		
	H27	-1	1.040	108.4	1,287.2	1,338.7			10,163.3	10,569.8	372.8	387.7	10,536.1	10,957.5		
	H28	0	1.000	108.4	2,120.7	2,120.7			8,939.1	8,939.1	649.4	649.4	9,588.5	9,588.5		
	H29	1	0.962	108.4	3,304.2	3,178.6			10,744.0	10,335.7	309.3	297.5	11,053.3	10,633.2		
	H30	2	0.925	108.4	4,464.0	4,129.2			12,095.7	11,188.5	480.9	444.8	12,576.6	11,633.3		
	H31	3	0.889	108.4	6,248.7	5,555.1			8,856.9	7,873.8	510.7	454.0	9,367.6	8,327.8		
	H32	4	0.855	108.4	8,114.0	6,937.5			3,869.3	3,308.3	532.1	454.9	4,401.4	3,763.2		
	H33	5	0.822	108.4	9,146.0	7,518.0			1,284.8	1,056.1	301.8	248.1	1,586.6	1,304.2		
	H34	6	0.790	108.4	9,598.0	7,582.4			785.0	620.2	144.2	113.9	929.2	734.1		
	H35	7	0.760	108.4	10,546.6	8,015.4			737.7	560.7	102.4	77.8	840.1	638.5		
	H36	8	0.731	108.4	12,279.2	8,976.1			737.7	539.3	95.9	70.1	833.6	609.4		
	H37	9	0.703	108.4	14,011.7	9,850.2			737.7	518.6	95.9	67.4	833.6	586.0		
	H38	10	0.676	108.4	15,744.3	10,643.1			737.7	498.7	95.9	64.8	833.6	563.5		
	H39	11	0.650	108.4	17,476.8	11,359.9			737.7	479.5	95.9	62.3	833.6	541.8		
	H40	12	0.625	108.4	19,209.3	12,005.8			737.7	461.1	95.9	59.9	833.6	521.0		
	H41	13	0.601	108.4	20,941.9	12,586.1			737.7	443.4	95.9	57.6	833.6	501.0		
	H42	14	0.577	108.4	22,675.1	13,083.5			690.7	398.5	95.9	55.3	786.6	453.8		
	H43	15	0.555	108.4	23,408.4	12,991.6			667.2	370.3	95.6	53.1	762.8	423.4		
	H44	16	0.534	108.4	23,641.6	12,624.6			667.2	356.3	269.6	144.0	936.8	500.3		
	H45	17	0.513	108.4	23,874.9	12,247.8			667.2	342.3	269.6	138.3	936.8	480.6		
	H46	18	0.494	108.4	24,108.1	11,909.4			667.2	329.6	1,452.5	717.5	2,119.7	1,047.1		
	H47	19	0.475	108.4	24,341.3	11,562.1			662.0	314.5	269.6	128.1	931.6	442.6		
	H48	20	0.456	108.4	24,572.8	11,205.2			620.6	283.0	269.2	122.8	889.8	405.8		
	H49	21	0.439	108.4	24,789.8	10,882.7			620.6	272.4	265.9	116.7	886.5	389.1		
	H50	22	0.422	108.4	25,006.7	10,552.8			620.6	261.9	265.9	112.2	886.5	374.1		
	H51	23	0.406	108.4	25,223.7	10,240.8			620.6	252.0	265.9	108.0	886.5	360.0		
	H52	24	0.390	108.4	25,440.7	9,921.9			620.6	242.0	265.9	103.7	886.5	345.7		
	H53	25	0.375	108.4	25,657.6	9,621.6			495.0	185.6	265.9	99.7	760.9	285.3		
	H54	26	0.361	108.4	25,830.7	9,324.9			394.5	142.4	256.0	92.4	650.5	234.8		
	H55	27	0.347	108.4	25,968.6	9,011.1			394.5	136.9	248.1	86.1	642.6	223.0		
	H56	28	0.333	108.4	26,106.5	8,693.5			394.5	131.4	248.1	82.6	642.6	214.0		
	H57	29	0.321	108.4	26,244.4	8,424.4			394.5	126.6	248.1	79.6	642.6	206.2		
	H58	30	0.308	108.4	26,382.3	8,125.8			394.5	121.5	248.1	76.4	642.6	197.9		
施設完成後の 評価期間 （50年）	H59	31	0.296		26,520.2	7,850.0					248.1	73.4	248.1	73.4		
	H60	32	0.285		26,520.2	7,558.3					319.3	91.0	319.3	91.0		
	H61	33	0.274		26,520.2	7,266.5					1,502.2	411.6	1,502.2	411.6		
	H62	34	0.264		26,520.2	7,001.3					319.3	84.3	319.3	84.3		
	H63	35	0.253		26,520.2	6,709.6					319.3	80.8	319.3	80.8		
	H64	36	0.244		26,520.2	6,470.9					319.3	77.9	319.3	77.9		
	H65	37	0.234		26,520.2	6,205.7					319.3	74.7	319.3	74.7		
	H66	38	0.225		26,520.2	5,967.0					319.3	71.8	319.3	71.8		
	H67	39	0.217		26,520.2	5,754.9					319.3	69.3	319.3	69.3		
	H68	40	0.208		26,520.2	5,516.2					319.3	66.4	319.3	66.4		
	H69	41	0.200		26,520.2	5,304.0					319.3	63.9	319.3	63.9		
	H70	42	0.193		26,520.2	5,118.4					319.3	61.6	319.3	61.6		
	H71	43	0.185		26,520.2	4,906.2					319.3	59.1	319.3	59.1		
	H72	44	0.178		26,520.2	4,720.6					319.3	56.8	319.3	56.8		
	H73	45	0.171		26,520.2	4,535.0					319.3	54.6	319.3	54.6		
	H74	46	0.165		26,520.2	4,375.8					319.3	52.7	319.3	52.7		
	H75	47	0.158		26,520.2	4,190.2					319.3	50.4	319.3	50.4		
	H76	48	0.152		26,520.2	4,031.1					1,502.2	228.3	1,502.2	228.3		
	H77	49	0.146		26,520.2	3,871.9					319.3	46.6	319.3	46.6		
	H78	50	0.141		26,520.2	3,739.3					319.3	45.0	319.3	45.0		
	H79	51	0.135		26,520.2	3,580.2					319.3	43.1	319.3	43.1		
	H80	52	0.130		26,520.2	3,447.6					319.3	41.5	319.3	41.5		
	H81	53	0.125		26,520.2	3,315.0					319.3	39.9	319.3	39.9		
	H82	54	0.120		26,520.2	3,182.4					319.3	38.3	319.3	38.3		
	H83	55	0.116		26,520.2	3,076.3					319.3	37.0	319.3	37.0		
	H84	56	0.111		26,520.2	2,943.7					319.3	35.4	319.3	35.4		
	H85	57	0.107		26,520.2	2,837.7					319.3	34.2	319.3	34.2		
	H86	58	0.103		26,520.2	2,731.6					319.3	32.9	319.3	32.9		
	H87	59	0.099		26,520.2	2,625.5					319.3	31.6	319.3	31.6		
	H88	60	0.095		26,520.2	2,519.4					319.3	30.3	319.3	30.3		
	H89	61	0.091		26,520.2	2,413.3					319.3	29.1	319.3	29.1		
	H90	62	0.088		26,520.2	2,333.8					319.3	28.1	319.3	28.1		
	H91	63	0.085		26,520.											

様式－５ 費用対便益（全体事業・残工期-10%）

水系名：由良川水系 河川名：由良川

年次		年度	t	割引率 4%	デフレーター (治水事業費 指数 (河川))	便 益 (B)		残存価値 (2)	計 (1)+(2)	費 用 (C)				費用便益比 B/C	純現在価値 B-C		
						便益①	現在価値			建設費③	維持管理費④		計③+④				
						便益	現在価値			費用	現在価値	費用	現在価値	費用	現在価値		
整備期間 (38年)		H15	-13	1.665	99.1	0.0	0.0			2,005.3	3,652.2	0.0	0.0	2,005.3	3,652.2		
		H16	-12	1.601	99.5	79.0	126.5			5,823.5	10,157.4	422.9	737.6	6,246.4	10,895.0		
		H17	-11	1.539	100.0	179.1	275.6			2,870.0	4,788.0	399.9	667.1	3,269.9	5,455.1		
		H18	-10	1.480	101.1	258.5	382.6			4,065.5	6,451.4	452.6	718.2	4,518.1	7,169.6		
		H19	-9	1.423	102.7	347.8	494.9			6,486.6	9,742.7	474.5	712.7	6,961.1	10,455.4		
		H20	-8	1.369	105.8	519.2	710.8			7,315.0	10,260.3	420.9	590.4	7,735.9	10,850.7		
		H21	-7	1.316	102.5	681.6	897.0			5,711.7	7,949.3	433.3	603.0	6,145.0	8,552.3		
		H22	-6	1.265	102.6	765.5	968.4			6,623.1	8,851.8	326.4	436.2	6,949.5	9,288.0		
		H23	-5	1.217	104.7	844.4	1,027.6			6,779.4	8,542.1	872.4	1,099.2	7,651.8	9,641.3		
		H24	-4	1.170	103.0	891.1	1,042.6			13,022.8	16,035.5	553.8	681.9	13,576.6	16,717.4		
		H25	-3	1.125	105.4	1,024.0	1,152.0			8,501.7	9,836.6	363.5	420.6	8,865.2	10,257.2		
		H26	-2	1.082	108.4	1,129.4	1,222.0			8,713.2	9,427.7	293.4	317.5	9,006.6	9,745.2		
		H27	-1	1.040	108.4	1,287.2	1,338.7			10,163.3	10,569.8	372.8	387.7	10,536.1	10,957.5		
		H28	0	1.000	108.4	2,120.7	2,120.7			8,939.1	8,939.1	649.4	649.4	9,588.5	9,588.5		
		H29	1	0.962	108.4	3,304.2	3,178.6			13,641.4	13,123.0	309.3	297.5	13,950.7	13,420.5		
		H30	2	0.925	108.4	4,851.6	4,487.8			14,113.7	13,055.2	604.0	558.7	14,717.7	13,613.9		
		H31	3	0.889	108.4	7,181.0	6,383.9			7,345.3	6,530.0	668.3	594.1	8,013.6	7,124.1		
		H32	4	0.855	108.4	8,992.3	7,688.4			1,750.5	1,496.7	520.2	444.8	2,270.7	1,941.5		
		H33	5	0.822	108.4	9,598.0	7,889.6			969.4	796.8	171.8	141.2	1,141.2	938.0		
		H34	6	0.790	108.4	10,979.8	8,674.0			922.1	728.5	115.7	91.4	1,037.8	819.9		
		H35	7	0.760	108.4	13,145.5	9,990.5			922.1	700.8	109.2	83.0	1,031.3	783.8		
		H36	8	0.731	108.4	15,311.2	11,192.5			922.1	674.1	109.2	79.8	1,031.3	753.9		
		H37	9	0.703	108.4	17,476.8	12,286.2			922.1	648.2	109.2	76.8	1,031.3	725.0		
		H38	10	0.676	108.4	19,642.4	13,278.3			922.1	623.3	109.2	73.8	1,031.3	697.1		
		H39	11	0.650	108.4	21,808.4	14,175.5			892.8	580.3	109.2	71.0	1,002.0	651.3		
		H40	12	0.625	108.4	23,350.1	14,593.8			834.0	521.3	108.9	68.1	942.9	589.4		
		H41	13	0.601	108.4	23,641.6	14,208.6			834.0	501.2	303.7	182.5	1,137.7	683.7		
		H42	14	0.577	108.4	23,933.2	13,809.5			834.0	481.2	303.7	175.2	1,137.7	656.4		
		H43	15	0.555	108.4	24,224.7	13,444.7			834.0	462.9	303.7	168.6	1,137.7	631.5		
		H44	16	0.534	108.4	24,516.3	13,091.7			782.2	417.7	303.7	162.2	1,085.9	579.9		
		H45	17	0.513	108.4	24,789.8	12,717.2			775.7	397.9	299.6	153.7	1,075.3	551.6		
		H46	18	0.494	108.4	25,060.9	12,380.1			775.7	383.2	1,482.0	732.1	2,257.7	1,115.3		
		H47	19	0.475	108.4	25,332.2	12,032.8			775.7	368.5	299.1	142.1	1,074.8	510.6		
		H48	20	0.456	108.4	25,603.4	11,675.1			650.1	296.4	299.1	136.4	949.2	432.8		
		H49	21	0.439	108.4	25,830.7	11,339.7			493.1	216.5	289.2	127.0	782.3	343.5		
		H50	22	0.422	108.4	26,003.1	10,973.3			547.9	231.2	276.8	116.8	824.7	348.0		
		H51	23	0.406	108.4	26,194.6	10,635.0			547.9	222.4	281.1	114.1	829.0	336.5		
		H52	24	0.390	108.4	26,386.2	10,290.6			547.9	213.7	281.1	109.6	829.0	323.3		
施設完成後の評価期間 (50年)		H53	25	0.375		26,577.7	9,966.6					281.1	105.4	281.1	105.4		
		H54	26	0.361		26,577.7	9,594.5					356.7	128.8	356.7	128.8		
		H55	27	0.347		26,577.7	9,222.4					356.7	123.8	356.7	123.8		
		H56	28	0.333		26,577.7	8,850.4					356.7	118.8	356.7	118.8		
		H57	29	0.321		26,577.7	8,531.4					356.7	114.5	356.7	114.5		
		H58	30	0.308		26,577.7	8,185.9					356.7	109.9	356.7	109.9		
		H59	31	0.296		26,577.7	7,867.0					356.7	105.6	356.7	105.6		
		H60	32	0.285		26,577.7	7,574.6					356.7	101.7	356.7	101.7		
		H61	33	0.274		26,577.7	7,282.3					1,539.6	421.9	1,539.6	421.9		
		H62	34	0.264		26,577.7	7,016.5					356.7	94.2	356.7	94.2		
		H63	35	0.253		26,577.7	6,724.1					356.7	90.2	356.7	90.2		
		H64	36	0.244		26,577.7	6,484.9					356.7	87.0	356.7	87.0		
		H65	37	0.234		26,577.7	6,219.2					356.7	83.5	356.7	83.5		
		H66	38	0.225		26,577.7	5,980.0					356.7	80.3	356.7	80.3		
		H67	39	0.217		26,577.7	5,767.4					356.7	77.4	356.7	77.4		
		H68	40	0.208		26,577.7	5,528.2					356.7	74.2	356.7	74.2		
		H69	41	0.200		26,577.7	5,315.5					356.7	71.3	356.7	71.3		
		H70	42	0.193		26,577.7	5,129.5					356.7	68.8	356.7	68.8		
		H71	43	0.185		26,577.7	4,916.9					356.7	66.0	356.7	66.0		
		H72	44	0.178		26,577.7	4,730.8					356.7	63.5	356.7	63.5		
		H73	45	0.171		26,577.7	4,544.8					356.7	61.0	356.7	61.0		
		H74	46	0.165		26,577.7	4,385.3					356.7	58.9	356.7	58.9		
		H75	47	0.158		26,577.7	4,199.3					356.7	56.4	356.7	56.4		
		H76	48	0.152		26,577.7	4,039.8					1,539.6	234.0	1,539.6	234.0		
		H77	49	0.146		26,577.7	3,880.3					356.7	52.1	356.7	52.1		
		H78	50	0.141		26,577.7	3,747.5					356.7	50.3	356.7	50.3		
		H79	51	0.135		26,577.7	3,588.0					356.7	48.2	356.7	48.2		
		H80	52	0.130		26,577.7	3,455.1					356.7	46.4	356.7	46.4		
		H81	53	0.125		26,577.7	3,322.2					356.7	44.6	356.7	44.6		
		H82	54	0.120		26,577.7	3,189.3					356.7	42.8	356.7	42.8		
		H83	55	0.116		26,577.7	3,083.0					356.7	41.4	356.7	41.4		
		H84	56	0.111		26,577.7	2,950.1					356.7	39.6	356.7	39.6		
		H85	57	0.107		26,577.7	2,843.8					356.7	38.2	356.7	38.2		
		H86	58	0.103		26,577.7	2,737.5					356.7	36.7	356.7	36.7		
		H87	59	0.099		26,577.7	2,631.2					356.7	35.3	356.7	35.3		
		H88	60	0.095		26,577.7	2,524.9					356.7	33.9	356.7	33.9		
		H89	61	0.091		26,577.7	2,418.6					356.7	32.5	356.7	32.5		
		H90	62	0.088		26,577.7	2,338.8					356.7	31.4	356.7	31.4		

様式－５ 費用対便益（全体事業・資産+10%）

水系名：由良川水系 河川名：由良川

年次		年度	t	割引率 4%	デフレーター (治水事業費 指数 (河川))	便 益 (B)		残存価値 ②	計 ①+②	費 用 (C)				費用便益比 B/C	純現在価値 B-C
						便益①				建設費③		維持管理費④		計③+④	
						便益	現在価値			費用	現在価値	費用	現在価値	費用	現在価値
整備期間（４１年）		H15	-13	1.665	99.1	0.0	0.0			2,005.3	3,652.2	0.0	0.0	2,005.3	3,652.2
		H16	-12	1.601	99.5	86.6	138.6			5,823.5	10,157.4	422.9	737.6	6,246.4	10,895.0
		H17	-11	1.539	100.0	196.1	301.8			2,870.0	4,788.0	399.9	667.1	3,269.9	5,455.1
		H18	-10	1.480	101.1	283.1	419.0			4,065.5	6,451.4	452.6	718.2	4,518.1	7,169.6
		H19	-9	1.423	102.7	380.8	541.9			6,486.6	9,742.7	474.5	712.7	6,961.1	10,455.4
		H20	-8	1.369	105.8	568.6	778.4			7,315.0	10,260.3	420.9	590.4	7,735.9	10,850.7
		H21	-7	1.316	102.5	746.5	982.4			5,711.7	7,949.3	433.3	603.0	6,145.0	8,552.3
		H22	-6	1.265	102.6	838.3	1,060.4			6,623.1	8,851.8	326.4	436.2	6,949.5	9,288.0
		H23	-5	1.217	104.7	924.7	1,125.4			6,779.4	8,542.1	872.4	1,099.2	7,651.8	9,641.3
		H24	-4	1.170	103.0	975.9	1,141.8			13,022.8	16,035.5	553.8	681.9	13,576.6	16,717.4
		H25	-3	1.125	105.4	1,121.4	1,261.6			8,501.7	9,836.6	363.5	420.6	8,865.2	10,257.2
		H26	-2	1.082	108.4	1,236.9	1,338.3			8,713.2	9,427.7	293.4	317.5	9,006.6	9,745.2
		H27	-1	1.040	108.4	1,409.7	1,466.1			10,163.3	10,569.8	372.8	387.7	10,536.1	10,957.5
		H28	0	1.000	108.4	2,324.3	2,324.3			8,939.1	8,939.1	649.4	649.4	9,588.5	9,588.5
		H29	1	0.962	108.4	3,620.9	3,483.3			11,937.9	11,484.3	309.3	297.5	12,247.2	11,781.8
		H30	2	0.925	108.4	5,036.6	4,658.9			13,627.4	12,605.3	533.6	493.6	14,161.0	13,098.9
		H31	3	0.889	108.4	7,308.6	6,497.3			8,759.0	7,786.8	585.7	520.7	9,344.7	8,307.5
		H32	4	0.855	108.4	9,585.2	8,195.3			2,069.3	1,769.3	600.7	513.6	2,670.0	2,282.9
		H33	5	0.822	108.4	10,336.0	8,496.2			914.2	751.5	197.0	161.9	1,111.2	913.4
		H34	6	0.790	108.4	10,728.4	8,475.4			819.6	647.5	114.9	90.8	934.5	738.3
		H35	7	0.760	108.4	12,839.2	9,757.8			819.6	622.9	101.8	77.4	921.4	700.3
		H36	8	0.731	108.4	14,949.9	10,928.4			819.6	599.1	101.8	74.4	921.4	673.5
		H37	9	0.703	108.4	17,060.7	11,993.7			819.6	576.2	101.8	71.6	921.4	647.8
		H38	10	0.676	108.4	19,171.5	12,959.9			819.6	554.0	101.8	68.8	921.4	622.8
		H39	11	0.650	108.4	21,282.3	13,833.5			819.6	532.7	101.8	66.2	921.4	598.9
		H40	12	0.625	108.4	23,392.9	14,620.6			819.6	512.3	101.8	63.6	921.4	575.9
		H41	13	0.601	108.4	25,504.7	15,328.3			741.3	445.5	101.8	61.2	843.1	506.7
	H42	14	0.577	108.4	25,789.4	14,880.5			741.3	427.7	288.9	166.7	1,030.2	594.4	
	H43	15	0.555	108.4	26,074.1	14,471.1			741.3	411.4	288.9	160.3	1,030.2	571.7	
	H44	16	0.534	108.4	26,358.8	14,075.6			741.3	395.9	288.9	154.3	1,030.2	550.2	
	H45	17	0.513	108.4	26,643.4	13,668.1			741.3	380.3	288.9	148.2	1,030.2	528.5	
	H46	18	0.494	108.4	26,928.1	13,302.5			689.5	340.6	1,471.8	727.1	2,161.3	1,067.7	
	H47	19	0.475	108.4	27,192.9	12,916.6			689.5	327.5	284.8	135.3	974.3	462.8	
	H48	20	0.456	108.4	27,457.7	12,520.7			689.5	314.4	284.8	129.9	974.3	444.3	
	H49	21	0.439	108.4	27,722.5	12,170.2			689.5	302.7	284.8	125.0	974.3	427.7	
	H50	22	0.422	108.4	27,987.2	11,810.6			689.5	291.0	284.8	120.2	974.3	411.2	
	H51	23	0.406	108.4	28,252.0	11,470.3			438.3	177.9	284.8	115.6	723.1	293.5	
	H52	24	0.390	108.4	28,420.3	11,083.9			438.3	170.9	264.9	103.3	703.2	274.2	
	H53	25	0.375	108.4	28,588.7	10,720.8			438.3	164.4	264.9	99.3	703.2	263.7	
	H54	26	0.361	108.4	28,757.0	10,381.3			438.3	158.2	264.9	95.6	703.2	253.8	
	H55	27	0.347	108.4	28,925.3	10,037.1			438.3	152.1	264.9	91.9	703.2	244.0	
施設完成後の 評価期間（５０年）		H56	28	0.333		29,093.6	9,688.2					264.9	88.2	264.9	88.2
		H57	29	0.321		29,093.6	9,339.0					340.1	109.2	340.1	109.2
		H58	30	0.308		29,093.6	8,960.8					340.1	104.8	340.1	104.8
		H59	31	0.296		29,093.6	8,611.7					340.1	100.7	340.1	100.7
		H60	32	0.285		29,093.6	8,291.7					340.1	96.9	340.1	96.9
		H61	33	0.274		29,093.6	7,971.6					1,523.0	417.3	1,523.0	417.3
		H62	34	0.264		29,093.6	7,680.7					340.1	89.8	340.1	89.8
		H63	35	0.253		29,093.6	7,360.7					340.1	86.0	340.1	86.0
		H64	36	0.244		29,093.6	7,098.8					340.1	83.0	340.1	83.0
		H65	37	0.234		29,093.6	6,807.9					340.1	79.6	340.1	79.6
		H66	38	0.225		29,093.6	6,546.1					340.1	76.5	340.1	76.5
		H67	39	0.217		29,093.6	6,313.3					340.1	73.8	340.1	73.8
		H68	40	0.208		29,093.6	6,051.5					340.1	70.7	340.1	70.7
		H69	41	0.200		29,093.6	5,818.7					340.1	68.0	340.1	68.0
		H70	42	0.193		29,093.6	5,615.1					340.1	65.6	340.1	65.6
		H71	43	0.185		29,093.6	5,382.3					340.1	62.9	340.1	62.9
		H72	44	0.178		29,093.6	5,178.7					340.1	60.5	340.1	60.5
		H73	45	0.171		29,093.6	4,975.0					340.1	58.2	340.1	58.2
		H74	46	0.165		29,093.6	4,800.4					340.1	56.1	340.1	56.1
		H75	47	0.158		29,093.6	4,596.8					340.1	53.7	340.1	53.7
		H76	48	0.152		29,093.6	4,422.2					1,523.0	231.5	1,523.0	231.5
		H77	49	0.146		29,093.6	4,247.7					340.1	49.7	340.1	49.7
		H78	50	0.141		29,093.6	4,102.2					340.1	48.0	340.1	48.0
		H79	51	0.135		29,093.6	3,927.6					340.1	45.9	340.1	45.9
		H80	52	0.130		29,093.6	3,782.2					340.1	44.2	340.1	44.2
		H81	53	0.125		29,093.6	3,636.7					340.1	42.5	340.1	42.5
		H82	54	0.120		29,093.6	3,491.2					340.1	40.8	340.1	40.8
		H83	55	0.116		29,093.6	3,374.9					340.1	39.5	340.1	39.5
		H84	56	0.111		29,093.6	3,229.4					340.1	37.8	340.1	37.8
		H85	57	0.107		29,093.6	3,113.0					340.1	36.4	340.1	36.4
		H86	58	0.103		29,093.6	2,996.6					340.1	35.0	340.1	35.0
		H87	59	0.099		29,093.6	2,880.3					340.1	33.7	340.1	33.7
		H88	60	0.095		29,093.6	2,763.9					340.1	32.3	340.1	32.3
		H89	61	0.091		29,093.6	2,647.5					340.1	30.9	340.1	30.9
		H90	62	0.088		29,093.6	2,560.2					340.1	29.9	340.1	29.9
	H91	63	0.085		29,093.6	2,473.0					1,523.0	129.5	1,523.0	129.5	
	H92	64	0.081		29,093.6	2,356.6					340.1	27.5	340.1	27.5	
	H93	65	0.078		29,093.6	2,269.3					340.1	26.5	340.1	26.5	
	H94	66	0.075		29,093.6	2,182.0					340.1	25.5	340.1	25.5	
	H95	67													

事業費： 149,411

単位：百万円

様式－５ 費用対便益（全体事業・資産-10%）

水系名：由良川水系 河川名：由良川

年次		年度	t	割引率 4%	デフレーター (治水事業費 指数 (河川))	便 益 (B)		残存価値 (2)	計 ①+②	費 用 (C)				費用便益比 B/C	純現在価値 B-C
						便益①				建設費③		維持管理費④		計③+④	
						便益	現在価値			費用	現在価値	費用	現在価値	費用	現在価値
整備期間 (41年)	H15	-13	1.665	99.1	0.0	0.0	0.0			2,005.3	3,652.2	0.0	0.0	2,005.3	3,652.2
	H16	-12	1.601	99.5	71.5	114.5				5,823.5	10,157.4	422.9	737.6	6,246.4	10,895.0
	H17	-11	1.539	100.0	162.1	249.5				2,870.0	4,788.0	399.9	667.1	3,269.9	5,455.1
	H18	-10	1.480	101.1	233.9	346.2				4,065.5	6,451.4	452.6	718.2	4,518.1	7,169.6
	H19	-9	1.423	102.7	314.7	447.8				6,486.6	9,742.7	474.5	712.7	6,961.1	10,455.4
	H20	-8	1.369	105.8	469.8	643.2				7,315.0	10,260.3	420.9	590.4	7,735.9	10,850.7
	H21	-7	1.316	102.5	616.8	811.7				5,711.7	7,949.3	433.3	603.0	6,145.0	8,552.3
	H22	-6	1.265	102.6	692.7	876.3				6,623.1	8,851.8	326.4	436.2	6,949.5	9,288.0
	H23	-5	1.217	104.7	764.1	929.9				6,779.4	8,542.1	872.4	1,099.2	7,651.8	9,641.3
	H24	-4	1.170	103.0	806.4	943.5				13,022.8	16,035.5	553.8	681.9	13,576.6	16,717.4
	H25	-3	1.125	105.4	926.5	1,042.3				8,501.7	9,836.6	363.5	420.6	8,865.2	10,257.2
	H26	-2	1.082	108.4	1,021.9	1,105.7				8,713.2	9,427.7	293.4	317.5	9,006.6	9,745.2
	H27	-1	1.040	108.4	1,164.6	1,211.2				10,163.3	10,569.8	372.8	387.7	10,536.1	10,957.5
	H28	0	1.000	108.4	1,917.0	1,917.0				8,939.1	8,939.1	649.4	649.4	9,588.5	9,588.5
	H29	1	0.962	108.4	2,987.6	2,874.1				11,937.9	11,484.3	309.3	297.5	12,247.2	11,781.8
	H30	2	0.925	108.4	4,149.3	3,838.1				13,627.4	12,605.3	533.6	493.6	14,161.0	13,098.9
	H31	3	0.889	108.4	6,016.5	5,348.7				8,759.0	7,786.8	585.7	520.7	9,344.7	8,307.5
	H32	4	0.855	108.4	7,886.8	6,743.2				2,069.3	1,769.3	600.7	513.6	2,670.0	2,282.9
	H33	5	0.822	108.4	8,502.8	6,989.3				914.2	751.5	197.0	161.9	1,111.2	913.4
	H34	6	0.790	108.4	8,824.7	6,971.5				819.6	647.5	114.9	90.8	934.5	738.3
	H35	7	0.760	108.4	10,564.0	8,028.6				819.6	622.9	101.8	77.4	921.4	700.3
	H36	8	0.731	108.4	12,303.4	8,993.8				819.6	599.1	101.8	74.4	921.4	673.5
	H37	9	0.703	108.4	14,042.7	9,872.0				819.6	576.2	101.8	71.6	921.4	647.8
	H38	10	0.676	108.4	15,782.1	10,668.7				819.6	554.0	101.8	68.8	921.4	622.8
	H39	11	0.650	108.4	17,521.4	11,388.9				819.6	532.7	101.8	66.2	921.4	598.9
	H40	12	0.625	108.4	19,260.8	12,038.0				819.6	512.3	101.8	63.6	921.4	575.9
	H41	13	0.601	108.4	21,000.9	12,621.5				741.3	445.5	101.8	61.2	843.1	506.7
H42	14	0.577	108.4	21,234.6	12,252.4				741.3	427.7	288.9	166.7	1,030.2	594.4	
H43	15	0.555	108.4	21,468.3	11,914.9				741.3	411.4	288.9	160.3	1,030.2	571.7	
H44	16	0.534	108.4	21,701.9	11,588.8				741.3	395.9	288.9	154.3	1,030.2	550.2	
H45	17	0.513	108.4	21,935.6	11,253.0				741.3	380.3	288.9	148.2	1,030.2	528.5	
H46	18	0.494	108.4	22,169.3	10,951.6				689.5	340.6	1,471.8	727.1	2,161.3	1,067.7	
H47	19	0.475	108.4	22,386.6	10,633.6				689.5	327.5	284.8	135.3	974.3	462.8	
H48	20	0.456	108.4	22,604.0	10,307.4				689.5	314.4	284.8	129.9	974.3	444.3	
H49	21	0.439	108.4	22,821.3	10,018.6				689.5	302.7	284.8	125.0	974.3	427.7	
H50	22	0.422	108.4	23,038.6	9,722.3				689.5	291.0	284.8	120.2	974.3	411.2	
H51	23	0.406	108.4	23,256.0	9,441.9				438.3	177.9	284.8	115.6	723.1	293.5	
H52	24	0.390	108.4	23,394.2	9,123.7				438.3	170.9	264.9	103.3	703.2	274.2	
H53	25	0.375	108.4	23,532.3	8,824.6				438.3	164.4	264.9	99.3	703.2	263.7	
H54	26	0.361	108.4	23,670.5	8,545.1				438.3	158.2	264.9	95.6	703.2	253.8	
H55	27	0.347	108.4	23,808.6	8,261.6				438.3	152.1	264.9	91.9	703.2	244.0	
施設 完成後の 評価期間 (50年)	H56	28	0.333		23,946.8	7,974.3						264.9	88.2	264.9	88.2
	H57	29	0.321		23,946.8	7,686.9						340.1	109.2	340.1	109.2
	H58	30	0.308		23,946.8	7,375.6						340.1	104.8	340.1	104.8
	H59	31	0.296		23,946.8	7,088.3						340.1	100.7	340.1	100.7
	H60	32	0.285		23,946.8	6,824.8						340.1	96.9	340.1	96.9
	H61	33	0.274		23,946.8	6,561.4						1,523.0	417.3	1,523.0	417.3
	H62	34	0.264		23,946.8	6,322.0						340.1	89.8	340.1	89.8
	H63	35	0.253		23,946.8	6,058.5						340.1	86.0	340.1	86.0
	H64	36	0.244		23,946.8	5,843.0						340.1	83.0	340.1	83.0
	H65	37	0.234		23,946.8	5,603.6						340.1	79.6	340.1	79.6
	H66	38	0.225		23,946.8	5,388.0						340.1	76.5	340.1	76.5
	H67	39	0.217		23,946.8	5,196.5						340.1	73.8	340.1	73.8
	H68	40	0.208		23,946.8	4,980.9						340.1	70.7	340.1	70.7
	H69	41	0.200		23,946.8	4,789.4						340.1	68.0	340.1	68.0
	H70	42	0.193		23,946.8	4,621.7						340.1	65.6	340.1	65.6
	H71	43	0.185		23,946.8	4,430.2						340.1	62.9	340.1	62.9
	H72	44	0.178		23,946.8	4,262.5						340.1	60.5	340.1	60.5
	H73	45	0.171		23,946.8	4,094.9						340.1	58.2	340.1	58.2
	H74	46	0.165		23,946.8	3,951.2						340.1	56.1	340.1	56.1
	H75	47	0.158		23,946.8	3,783.6						340.1	53.7	340.1	53.7
	H76	48	0.152		23,946.8	3,639.9						1,523.0	231.5	1,523.0	231.5
	H77	49	0.146		23,946.8	3,496.2						340.1	49.7	340.1	49.7
	H78	50	0.141		23,946.8	3,376.5						340.1	48.0	340.1	48.0
	H79	51	0.135		23,946.8	3,232.8						340.1	45.9	340.1	45.9
	H80	52	0.130		23,946.8	3,113.1						340.1	44.2	340.1	44.2
	H81	53	0.125		23,946.8	2,993.4						340.1	42.5	340.1	42.5
	H82	54	0.120		23,946.8	2,873.6						340.1	40.8	340.1	40.8
	H83	55	0.116		23,946.8	2,777.8						340.1	39.5	340.1	39.5
	H84	56	0.111		23,946.8	2,658.1						340.1	37.8	340.1	37.8
	H85	57	0.107		23,946.8	2,562.3						340.1	36.4	340.1	36.4
	H86	58	0.103		23,946.8	2,466.5						340.1	35.0	340.1	35.0
	H87	59	0.099		23,946.8	2,370.7						340.1	33.7	340.1	33.7
	H88	60	0.095		23,946.8	2,274.9						340.1	32.3	340.1	32.3
	H89	61	0.091		23,946.8	2,179.2						340.1	30.9	340.1	30.9
H90	62	0.088		23,946.8	2,107.3						340.1	29.9	340.1	29.9	
H91	63	0.085		23,946.8	2,035.5						1,523.0	129.5	1,523.0	129.5	
H92	64	0.081		23,946.8	1,939.7						340.1	27.5	340.1	27.5	
H93	65	0.078		23,946.8	1,867.9						340.1	26.5	340.1	26.5	
H94	66	0.075		23,946.8	1,796.0						340.1	25.5	340.1	25.5	
H95	67	0.072		23,946.8	1,724.2										

様式－５ 費用対便益（残事業）

水系名：由良川水系 河川名：由良川

事業費： 52,391
単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			残存価値 ②	計 ①+②	建設費③		費 用 (C)		維持管理費④		計③+④		費用便益比 B / C	純現在価値 B - C
				便益①		現在価値			費用	現在価値	費用	現在価値	費用	現在価値				
				便益	現在価値													
評価年	H28	0	1.000	0.0	0.0				0.0	0.0	0.0	0.0	0.0	0.0	0.0			
整備期間 (2 7 年)	H29	1	0.962	0.0	0.0				11,937.9	11,484.3	0.0	0.0	11,937.9	11,484.3				
	H30	2	0.925	1,288.7	1,192.0				13,627.4	12,605.3	526.2	486.7	14,153.6	13,092.0				
	H31	3	0.889	3,358.5	2,985.7				8,759.0	7,786.8	578.3	514.1	9,337.3	8,300.9				
	H32	4	0.855	5,447.6	4,657.7				2,069.3	1,769.3	593.2	507.2	2,662.5	2,276.5				
	H33	5	0.822	6,115.2	5,026.7				914.2	751.5	189.5	155.8	1,103.7	907.3				
	H34	6	0.790	6,472.4	5,113.2				819.6	647.5	107.4	84.8	927.0	732.3				
	H35	7	0.760	8,397.5	6,382.1				819.6	622.9	94.3	71.7	913.9	694.6				
	H36	8	0.731	10,322.5	7,545.7				819.6	599.1	94.3	68.9	913.9	668.0				
	H37	9	0.703	12,247.6	8,610.1				819.6	576.2	94.3	66.3	913.9	642.5				
	H38	10	0.676	14,172.6	9,580.7				819.6	554.0	94.3	63.7	913.9	617.7				
	H39	11	0.650	16,097.6	10,463.4				819.6	532.7	94.3	61.3	913.9	594.0				
	H40	12	0.625	18,022.7	11,264.2				819.6	512.3	94.3	58.9	913.9	571.2				
	H41	13	0.601	19,948.7	11,989.2				741.3	445.5	94.3	56.7	835.6	502.2				
	H42	14	0.577	20,207.8	11,659.9				741.3	427.7	157.7	91.0	899.0	518.7				
	H43	15	0.555	20,467.0	11,359.2				741.3	411.4	157.7	87.5	899.0	498.9				
	H44	16	0.534	20,726.2	11,067.8				741.3	395.9	157.7	84.2	899.0	480.1				
	H45	17	0.513	20,985.3	10,765.5				741.3	380.3	157.7	80.9	899.0	461.2				
	H46	18	0.494	21,244.5	10,494.8				689.5	340.6	1,077.8	532.4	1,767.3	873.0				
	H47	19	0.475	21,485.6	10,205.7				689.5	327.5	153.6	73.0	843.1	400.5				
	H48	20	0.456	21,726.6	9,907.3				689.5	314.4	153.6	70.0	843.1	384.4				
	H49	21	0.439	21,967.7	9,643.8				689.5	302.7	153.6	67.4	843.1	370.1				
	H50	22	0.422	22,208.8	9,372.1				689.5	291.0	153.6	64.8	843.1	355.8				
	H51	23	0.406	22,449.8	9,114.6				438.3	177.9	153.6	62.4	591.9	240.3				
	H52	24	0.390	22,603.1	8,815.2				438.3	170.9	133.7	52.1	572.0	223.0				
	H53	25	0.375	22,756.3	8,533.6				438.3	164.4	133.7	50.1	572.0	214.5				
	H54	26	0.361	22,909.5	8,270.3				438.3	158.2	133.7	48.3	572.0	206.5				
	H55	27	0.347	23,062.8	8,002.8				438.3	152.1	133.7	46.4	572.0	198.5				
	施設完成後の評価期間 (5 0 年)	H56	28	0.333	23,216.0	7,730.9						133.7	44.5	133.7	44.5			
H57		29	0.321	23,216.0	7,452.3						183.5	58.9	183.5	58.9				
H58		30	0.308	23,216.0	7,150.5						183.5	56.5	183.5	56.5				
H59		31	0.296	23,216.0	6,871.9						183.5	54.3	183.5	54.3				
H60		32	0.285	23,216.0	6,616.6						183.5	52.3	183.5	52.3				
H61		33	0.274	23,216.0	6,361.2						1,103.6	302.4	1,103.6	302.4				
H62		34	0.264	23,216.0	6,129.0						183.5	48.4	183.5	48.4				
H63		35	0.253	23,216.0	5,873.6						183.5	46.4	183.5	46.4				
H64		36	0.244	23,216.0	5,664.7						183.5	44.8	183.5	44.8				
H65		37	0.234	23,216.0	5,432.5						183.5	42.9	183.5	42.9				
H66		38	0.225	23,216.0	5,223.6						183.5	41.3	183.5	41.3				
H67		39	0.217	23,216.0	5,037.9						183.5	39.8	183.5	39.8				
H68		40	0.208	23,216.0	4,828.9						183.5	38.2	183.5	38.2				
H69		41	0.200	23,216.0	4,643.2						183.5	36.7	183.5	36.7				
H70		42	0.193	23,216.0	4,480.7						183.5	35.4	183.5	35.4				
H71		43	0.185	23,216.0	4,295.0						183.5	33.9	183.5	33.9				
H72		44	0.178	23,216.0	4,132.4						183.5	32.7	183.5	32.7				
H73		45	0.171	23,216.0	3,969.9						183.5	31.4	183.5	31.4				
H74		46	0.165	23,216.0	3,830.6						183.5	30.3	183.5	30.3				
H75		47	0.158	23,216.0	3,668.1						183.5	29.0	183.5	29.0				
H76		48	0.152	23,216.0	3,528.8						1,103.6	167.7	1,103.6	167.7				
H77		49	0.146	23,216.0	3,389.5						183.5	26.8	183.5	26.8				
H78		50	0.141	23,216.0	3,273.5						183.5	25.9	183.5	25.9				
H79		51	0.135	23,216.0	3,134.2						183.5	24.8	183.5	24.8				
H80		52	0.130	23,216.0	3,018.1						183.5	23.9	183.5	23.9				
H81		53	0.125	23,216.0	2,902.0						183.5	22.9	183.5	22.9				
H82		54	0.120	23,216.0	2,785.9						183.5	22.0	183.5	22.0				
H83		55	0.116	23,216.0	2,693.1						183.5	21.3	183.5	21.3				
H84		56	0.111	23,216.0	2,577.0						183.5	20.4	183.5	20.4				
H85		57	0.107	23,216.0	2,484.1						183.5	19.6	183.5	19.6				
H86		58	0.103	23,216.0	2,391.2						183.5	18.9	183.5	18.9				
H87		59	0.099	23,216.0	2,298.4						183.5	18.2	183.5	18.2				
H88		60	0.095	23,216.0	2,205.5						183.5	17.4	183.5	17.4				
H89		61	0.091	23,216.0	2,112.7						183.5	16.7	183.5	16.7				
H90		62	0.088	23,216.0	2,043.0						183.5	16.1	183.5	16.1				
H91		63	0.085	23,216.0	1,973.4						1,103.6	93.8	1,103.6	93.8				
H92		64	0.081	23,216.0	1,880.5						183.5	14.9	183.5	14.9				
H93		65	0.078	23,216.0	1,810.8						183.5	14.3	183.5	14.3				
H94		66	0.075	23,216.0	1,741.2						183.5	13.8	183.5	13.8				
H95		67	0.072	23,216.0	1,671.6						183.5	13.2	183.5	13.2				
H96		68	0.069	23,216.0	1,601.9						183.5	12.7	183.5	12.7				
H97		69	0.067	23,216.0	1,555.5						183.5	12.3	183.5	12.3				
H98		70	0.064	23,216.0	1,485.8						183.5	11.7	183.5	11.7				
H99		71	0.062	23,216.0	1,439.4						183.5	11.4	183.5	11.4				
H100		72	0.059	23,216.0	1,369.7						183.5	10.8	183.5	10.8				
H101		73	0.057	23,216.0	1,323.3						183.5	10.5	183.5	10.5				
H102		74	0.055	23,216.0	1,276.9						183.5	10.1	183.5	10.1				
H103		75	0.053	23,216.0	1,230.4						183.5	9.7	183.5	9.7				
H104		76	0.051	23,216.0	1,184.0						183.5	9.4	183.5	9.4				
H105		77	0.049	23,216.0	1,137.6						183.5	9.0	183.5	9.0				
合 計				1,587,492.6	394,935.8	421.3	395,357.1	52,390.5	42,902.4	17,551.6	5,426.9	69,942.1	48,329.3	8.2	347,027.8			

様式－５ 費用対便益（残事業・残事業費+10%）

水系名：由良川水系 河川名：由良川

事業費： 57,630
単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			費 用 (C)						費用便益比 B／C	純現在価値 B－C	
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用			現在価値
評価年	H28	0	1.000	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0		
整備期間（27年）	H29	1	0.962	0.0	0.0			13,131.7	12,632.7	0.0	0.0	13,131.7	12,632.7		
	H30	2	0.925	1,288.7	1,192.0			14,990.1	13,865.9	526.2	486.7	15,516.3	14,352.6		
	H31	3	0.889	3,358.5	2,985.7			9,634.9	8,565.4	578.3	514.1	10,213.2	9,079.5		
	H32	4	0.855	5,447.6	4,657.7			2,276.2	1,946.2	593.2	507.2	2,869.4	2,453.4		
	H33	5	0.822	6,115.2	5,026.7			1,005.6	826.6	189.5	155.8	1,195.1	982.4		
	H34	6	0.790	6,472.4	5,113.2			901.6	712.2	107.4	84.8	1,009.0	797.0		
	H35	7	0.760	8,397.5	6,382.1			901.6	685.2	94.3	71.7	995.9	756.9		
	H36	8	0.731	10,322.5	7,545.7			901.6	659.0	94.3	68.9	995.9	727.9		
	H37	9	0.703	12,247.6	8,610.1			901.6	633.8	94.3	66.3	995.9	700.1		
	H38	10	0.676	14,172.6	9,580.7			901.6	609.5	94.3	63.7	995.9	673.2		
	H39	11	0.650	16,097.6	10,463.4			901.6	586.0	94.3	61.3	995.9	647.3		
	H40	12	0.625	18,022.7	11,264.2			901.6	563.5	94.3	58.9	995.9	622.4		
	H41	13	0.601	19,948.7	11,989.2			815.4	490.1	94.3	56.7	909.7	546.8		
	H42	14	0.577	20,207.8	11,659.9			815.4	470.5	157.7	91.0	973.1	561.5		
	H43	15	0.555	20,467.0	11,359.2			815.4	452.6	157.7	87.5	973.1	540.1		
	H44	16	0.534	20,726.2	11,067.8			815.4	435.4	157.7	84.2	973.1	519.6		
	H45	17	0.513	20,985.3	10,765.5			815.4	418.3	157.7	80.9	973.1	499.2		
	H46	18	0.494	21,244.5	10,494.8			758.5	374.7	1,077.8	532.4	1,836.3	907.1		
	H47	19	0.475	21,485.6	10,205.7			758.5	360.3	153.6	73.0	912.1	433.3		
	H48	20	0.456	21,726.6	9,907.3			758.5	345.9	153.6	70.0	912.1	415.9		
	H49	21	0.439	21,967.7	9,643.8			758.5	333.0	153.6	67.4	912.1	400.4		
	H50	22	0.422	22,208.8	9,372.1			758.5	320.1	153.6	64.8	912.1	384.9		
	H51	23	0.406	22,449.8	9,114.6			482.1	195.7	153.6	62.4	635.7	258.1		
	H52	24	0.390	22,693.1	8,815.2			482.1	188.0	133.7	52.1	615.8	240.1		
	H53	25	0.375	22,756.3	8,533.6			482.1	180.8	133.7	50.1	615.8	230.9		
	H54	26	0.361	22,909.5	8,270.3			482.1	174.0	133.7	48.3	615.8	222.3		
	H55	27	0.347	23,062.8	8,002.8			482.1	167.3	133.7	46.4	615.8	213.7		
	施設完成後の評価期間（50年）	H56	28	0.333	23,216.0	7,730.9					133.7	44.5	133.7	44.5	
H57		29	0.321	23,216.0	7,452.3					183.5	58.9	183.5	58.9		
H58		30	0.308	23,216.0	7,150.5					183.5	56.5	183.5	56.5		
H59		31	0.296	23,216.0	6,871.9					183.5	54.3	183.5	54.3		
H60		32	0.285	23,216.0	6,616.6					183.5	52.3	183.5	52.3		
H61		33	0.274	23,216.0	6,361.2					1,103.6	302.4	1,103.6	302.4		
H62		34	0.264	23,216.0	6,129.0					183.5	48.4	183.5	48.4		
H63		35	0.253	23,216.0	5,873.6					183.5	46.4	183.5	46.4		
H64		36	0.244	23,216.0	5,664.7					183.5	44.8	183.5	44.8		
H65		37	0.234	23,216.0	5,432.5					183.5	42.9	183.5	42.9		
H66		38	0.225	23,216.0	5,223.6					183.5	41.3	183.5	41.3		
H67		39	0.217	23,216.0	5,037.9					183.5	39.8	183.5	39.8		
H68		40	0.208	23,216.0	4,828.9					183.5	38.2	183.5	38.2		
H69		41	0.200	23,216.0	4,643.2					183.5	36.7	183.5	36.7		
H70		42	0.193	23,216.0	4,480.7					183.5	35.4	183.5	35.4		
H71		43	0.185	23,216.0	4,295.0					183.5	33.9	183.5	33.9		
H72		44	0.178	23,216.0	4,132.4					183.5	32.7	183.5	32.7		
H73		45	0.171	23,216.0	3,969.9					183.5	31.4	183.5	31.4		
H74		46	0.165	23,216.0	3,830.6					183.5	30.3	183.5	30.3		
H75		47	0.158	23,216.0	3,668.1					183.5	29.0	183.5	29.0		
H76		48	0.152	23,216.0	3,528.8					1,103.6	167.7	1,103.6	167.7		
H77		49	0.146	23,216.0	3,389.5					183.5	26.8	183.5	26.8		
H78		50	0.141	23,216.0	3,273.5					183.5	25.9	183.5	25.9		
H79		51	0.135	23,216.0	3,134.2					183.5	24.8	183.5	24.8		
H80		52	0.130	23,216.0	3,018.1					183.5	23.9	183.5	23.9		
H81		53	0.125	23,216.0	2,902.0					183.5	22.9	183.5	22.9		
H82		54	0.120	23,216.0	2,785.9					183.5	22.0	183.5	22.0		
H83		55	0.116	23,216.0	2,693.1					183.5	21.3	183.5	21.3		
H84		56	0.111	23,216.0	2,577.0					183.5	20.4	183.5	20.4		
H85		57	0.107	23,216.0	2,484.1					183.5	19.6	183.5	19.6		
H86		58	0.103	23,216.0	2,391.2					183.5	18.9	183.5	18.9		
H87		59	0.099	23,216.0	2,298.4					183.5	18.2	183.5	18.2		
H88		60	0.095	23,216.0	2,205.5					183.5	17.4	183.5	17.4		
H89		61	0.091	23,216.0	2,112.7					183.5	16.7	183.5	16.7		
H90		62	0.088	23,216.0	2,043.0					183.5	16.1	183.5	16.1		
H91		63	0.085	23,216.0	1,973.4					1,103.6	93.8	1,103.6	93.8		
H92		64	0.081	23,216.0	1,880.5					183.5	14.9	183.5	14.9		
H93		65	0.078	23,216.0	1,810.8					183.5	14.3	183.5	14.3		
H94		66	0.075	23,216.0	1,741.2					183.5	13.8	183.5	13.8		
H95		67	0.072	23,216.0	1,671.6					183.5	13.2	183.5	13.2		
H96		68	0.069	23,216.0	1,601.9					183.5	12.7	183.5	12.7		
H97		69	0.067	23,216.0	1,555.5					183.5	12.3	183.5	12.3		
H98		70	0.064	23,216.0	1,485.8					183.5	11.7	183.5	11.7		
H99		71	0.062	23,216.0	1,439.4					183.5	11.4	183.5	11.4		
H100		72	0.059	23,216.0	1,369.7					183.5	10.8	183.5	10.8		
H101		73	0.057	23,216.0	1,323.3					183.5	10.5	183.5	10.5		
H102		74	0.055	23,216.0	1,276.9					183.5	10.1	183.5	10.1		
H103		75	0.053	23,216.0	1,230.4					183.5	9.7	183.5	9.7		
H104		76	0.051	23,216.0	1,184.0					183.5	9.4	183.5	9.4		
H105		77	0.049	23,216.0	1,137.6					183.5	9.0	183.5	9.0		
合 計				1,587,492.6	394,935.8	463.4	395,399.2	57,629.6	47,192.7	17,551.6	5,426.9	75,181.2	52,619.6	7.5 342,779.6	

様式－５ 費用対便益（残事業・残事業費－10%）

水系名：由良川水系 河川名：由良川

事業費： 47,151
単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)				費 用 (C)						費用便益比 B／C	純現在価値 B－C
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用	現在価値		
評価年	H28	0	1.000	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0		
	H29	1	0.962	0.0	0.0			10,744.1	10,335.8	0.0	0.0	10,744.1	10,335.8		
	H30	2	0.925	1,288.7	1,192.0			12,264.7	11,344.8	526.2	486.7	12,790.9	11,831.5		
	H31	3	0.889	3,358.5	2,985.7			7,883.1	7,008.1	578.3	514.1	8,461.4	7,522.2		
	H32	4	0.855	5,447.6	4,657.7			1,862.4	1,592.3	593.2	507.2	2,455.6	2,099.5		
	H33	5	0.822	6,115.2	5,026.7			822.8	676.3	189.5	155.8	1,012.3	832.1		
	H34	6	0.790	6,472.4	5,113.2			737.6	582.7	107.4	84.8	845.0	667.5		
	H35	7	0.760	8,397.5	6,382.1			737.6	560.6	94.3	71.7	831.9	632.3		
	H36	8	0.731	10,322.5	7,545.7			737.6	539.2	94.3	68.9	831.9	608.1		
	H37	9	0.703	12,247.6	8,610.1			737.6	518.6	94.3	66.3	831.9	584.9		
	H38	10	0.676	14,172.6	9,580.7			737.6	498.6	94.3	63.7	831.9	562.3		
	H39	11	0.650	16,097.6	10,463.4			737.6	479.5	94.3	61.3	831.9	540.8		
	H40	12	0.625	18,022.7	11,264.2			737.6	461.0	94.3	58.9	831.9	519.9		
	H41	13	0.601	19,948.7	11,989.2			667.2	401.0	94.3	56.7	761.5	457.7		
	H42	14	0.577	20,207.8	11,659.9			667.2	385.0	157.7	91.0	824.9	476.0		
	H43	15	0.555	20,467.0	11,359.2			667.2	370.3	157.7	87.5	824.9	457.8		
	H44	16	0.534	20,726.2	11,067.8			667.2	356.3	157.7	84.2	824.9	440.5		
	H45	17	0.513	20,985.3	10,765.5			667.2	342.3	157.7	80.9	824.9	423.2		
	H46	18	0.494	21,244.5	10,494.8			620.6	306.6	1,077.8	532.4	1,698.4	839.0		
	H47	19	0.475	21,485.6	10,205.7			620.6	294.8	153.6	73.0	774.2	367.8		
	H48	20	0.456	21,726.6	9,907.3			620.6	283.0	153.6	70.0	774.2	353.0		
	H49	21	0.439	21,967.7	9,643.8			620.6	272.4	153.6	67.4	774.2	339.8		
	H50	22	0.422	22,208.8	9,372.1			620.6	261.9	153.6	64.8	774.2	326.7		
	H51	23	0.406	22,449.8	9,114.6			394.5	160.2	153.6	62.4	548.1	222.6		
	H52	24	0.390	22,693.1	8,815.2			394.5	153.8	133.7	52.1	528.2	205.9		
	H53	25	0.375	22,756.3	8,533.6			394.5	147.9	133.7	50.1	528.2	198.0		
	H54	26	0.361	22,909.5	8,270.3			394.5	142.4	133.7	48.3	528.2	190.7		
	H55	27	0.347	23,062.8	8,002.8			394.5	136.9	133.7	46.4	528.2	183.3		
施設完成後の評価期間（50年）	H56	28	0.333	23,216.0	7,730.9			133.7	44.5	133.7	44.5				
	H57	29	0.321	23,216.0	7,452.3			183.5	58.9	183.5	58.9				
	H58	30	0.308	23,216.0	7,150.5			183.5	56.5	183.5	56.5				
	H59	31	0.296	23,216.0	6,871.9			183.5	54.3	183.5	54.3				
	H60	32	0.285	23,216.0	6,616.6			183.5	52.3	183.5	52.3				
	H61	33	0.274	23,216.0	6,361.2			1,103.6	302.4	1,103.6	302.4				
	H62	34	0.264	23,216.0	6,129.0			183.5	48.4	183.5	48.4				
	H63	35	0.253	23,216.0	5,873.6			183.5	46.4	183.5	46.4				
	H64	36	0.244	23,216.0	5,664.7			183.5	44.8	183.5	44.8				
	H65	37	0.234	23,216.0	5,432.5			183.5	42.9	183.5	42.9				
	H66	38	0.225	23,216.0	5,223.6			183.5	41.3	183.5	41.3				
	H67	39	0.217	23,216.0	5,037.9			183.5	39.8	183.5	39.8				
	H68	40	0.208	23,216.0	4,828.9			183.5	38.2	183.5	38.2				
	H69	41	0.200	23,216.0	4,643.2			183.5	36.7	183.5	36.7				
	H70	42	0.193	23,216.0	4,480.7			183.5	35.4	183.5	35.4				
	H71	43	0.185	23,216.0	4,295.0			183.5	33.9	183.5	33.9				
	H72	44	0.178	23,216.0	4,132.4			183.5	32.7	183.5	32.7				
	H73	45	0.171	23,216.0	3,969.9			183.5	31.4	183.5	31.4				
	H74	46	0.165	23,216.0	3,830.6			183.5	30.3	183.5	30.3				
	H75	47	0.158	23,216.0	3,668.1			183.5	29.0	183.5	29.0				
	H76	48	0.152	23,216.0	3,528.8			1,103.6	167.7	1,103.6	167.7				
	H77	49	0.146	23,216.0	3,389.5			183.5	26.8	183.5	26.8				
	H78	50	0.141	23,216.0	3,273.5			183.5	25.9	183.5	25.9				
	H79	51	0.135	23,216.0	3,134.2			183.5	24.8	183.5	24.8				
	H80	52	0.130	23,216.0	3,018.1			183.5	23.9	183.5	23.9				
	H81	53	0.125	23,216.0	2,902.0			183.5	22.9	183.5	22.9				
	H82	54	0.120	23,216.0	2,785.9			183.5	22.0	183.5	22.0				
	H83	55	0.116	23,216.0	2,693.1			183.5	21.3	183.5	21.3				
	H84	56	0.111	23,216.0	2,577.0			183.5	20.4	183.5	20.4				
	H85	57	0.107	23,216.0	2,484.1			183.5	19.6	183.5	19.6				
	H86	58	0.103	23,216.0	2,391.2			183.5	18.9	183.5	18.9				
	H87	59	0.099	23,216.0	2,298.4			183.5	18.2	183.5	18.2				
	H88	60	0.095	23,216.0	2,205.5			183.5	17.4	183.5	17.4				
	H89	61	0.091	23,216.0	2,112.7			183.5	16.7	183.5	16.7				
	H90	62	0.088	23,216.0	2,043.0			183.5	16.1	183.5	16.1				
	H91	63	0.085	23,216.0	1,973.4			1,103.6	93.8	1,103.6	93.8				
	H92	64	0.081	23,216.0	1,880.5			183.5	14.9	183.5	14.9				
	H93	65	0.078	23,216.0	1,810.8			183.5	14.3	183.5	14.3				
	H94	66	0.075	23,216.0	1,741.2			183.5	13.8	183.5	13.8				
	H95	67	0.072	23,216.0	1,671.6			183.5	13.2	183.5	13.2				
	H96	68	0.069	23,216.0	1,601.9			183.5	12.7	183.5	12.7				
	H97	69	0.067	23,216.0	1,555.5			183.5	12.3	183.5	12.3				
	H98	70	0.064	23,216.0	1,485.8			183.5	11.7	183.5	11.7				
	H99	71	0.062	23,216.0	1,439.4			183.5	11.4	183.5	11.4				
	H100	72	0.059	23,216.0	1,369.7			183.5	10.8	183.5	10.8				
	H101	73	0.057	23,216.0	1,323.3			183.5	10.5	183.5	10.5				
	H102	74	0.055	23,216.0	1,276.9			183.5	10.1	183.5	10.1				
	H103	75	0.053	23,216.0	1,230.4			183.5	9.7	183.5	9.7				
	H104	76	0.051	23,216.0	1,184.0			183.5	9.4	183.5	9.4				
	H105	77	0.049	23,216.0	1,137.6			183.5	9.0	183.5	9.0				
合 計				1,587,492.6	394,935.8	379.2	395,315.0	47,151.5	38,612.3	17,551.6	5,426.9	64,703.1	44,039.2	9.0	351,275.8

事業費： 52,392
単位：百万円

様式－５ 費用対便益（残事業・残工期+10%）

水系名：由良川水系 河川名：由良川

年次	年度	t	割引率 4%	便 益 (B)			残存価値 ②	計 ①+②	費 用 (C)						費用便益比 B/C	純現在価値 B-C
				便益①		建設費③			維持管理費④		計③+④					
				便益	現在価値				費用	現在価値	費用	現在価値				
評価年	H28	0	1.000	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
整備期間 (30年)	H29	1	0.962	0.0	0.0	10,744.0	10,335.7	0.0	0.0	10,744.0	10,335.7					
	H30	2	0.925	1,159.8	1,072.8	12,095.7	11,188.5	473.5	438.0	12,569.2	11,626.5					
	H31	3	0.889	2,944.5	2,617.7	8,856.9	7,873.8	503.3	447.4	9,360.2	8,321.2					
	H32	4	0.855	4,820.9	4,121.8	3,869.3	3,308.3	524.7	448.6	4,394.0	3,756.9					
	H33	5	0.822	5,848.2	4,807.2	1,284.8	1,056.1	294.3	241.9	1,579.1	1,298.0					
	H34	6	0.790	6,293.8	4,972.1	785.0	620.2	136.7	108.0	921.7	728.2					
	H35	7	0.760	7,242.4	5,504.3	737.7	560.7	94.9	72.1	832.6	632.8					
	H36	8	0.731	8,975.0	6,560.7	737.7	539.3	88.4	64.6	826.1	603.9					
	H37	9	0.703	10,707.5	7,527.4	737.7	518.6	88.4	62.1	826.1	580.7					
	H38	10	0.676	12,440.1	8,409.5	737.7	498.7	88.4	59.8	826.1	558.5					
	H39	11	0.650	14,172.6	9,212.2	737.7	479.5	88.4	57.5	826.1	537.0					
	H40	12	0.625	15,905.1	9,940.7	737.7	461.1	88.4	55.3	826.1	516.4					
	H41	13	0.601	17,637.7	10,600.2	737.7	443.4	88.4	53.1	826.1	496.5					
	H42	14	0.577	19,370.9	11,177.0	690.7	398.5	88.4	51.0	779.1	449.5					
	H43	15	0.555	20,104.2	11,157.8	667.2	370.3	88.1	48.9	755.3	419.2					
	H44	16	0.534	20,337.4	10,860.2	667.2	356.3	142.7	76.2	809.9	432.5					
	H45	17	0.513	20,570.7	10,552.8	667.2	342.3	142.7	73.2	809.9	415.5					
	H46	18	0.494	20,803.9	10,277.1	667.2	329.6	1,062.8	525.0	1,730.0	854.6					
	H47	19	0.475	21,037.1	9,992.6	662.0	314.5	142.7	67.8	804.7	382.3					
	H48	20	0.456	21,268.6	9,698.5	620.6	283.0	142.3	64.9	762.9	347.9					
	H49	21	0.439	21,485.6	9,432.2	620.6	272.4	139.0	61.0	759.6	333.4					
	H50	22	0.422	21,702.5	9,158.5	620.6	261.9	139.0	58.7	759.6	320.6					
	H51	23	0.406	21,919.5	8,899.3	620.6	252.0	139.0	56.4	759.6	308.4					
	H52	24	0.390	22,136.5	8,633.2	620.6	242.0	139.0	54.2	759.6	296.2					
	H53	25	0.375	22,353.4	8,382.5	495.0	185.6	139.0	52.1	634.0	237.7					
	H54	26	0.361	22,526.5	8,132.0	394.5	142.4	129.1	46.6	523.6	189.0					
	H55	27	0.347	22,664.4	7,864.5	394.5	136.9	121.2	42.1	515.7	179.0					
	H56	28	0.333	22,802.3	7,593.2	394.5	131.4	121.2	40.4	515.7	171.8					
	H57	29	0.321	22,940.2	7,363.8	394.5	126.6	121.2	38.9	515.7	165.5					
	H58	30	0.308	23,078.1	7,108.1	394.5	121.5	121.2	37.3	515.7	158.8					
	施設完成後の 評価期間 (50年)	H59	31	0.296	23,216.0	6,871.9			121.2	35.9	121.2	35.9				
H60		32	0.285	23,216.0	6,616.6			165.9	47.3	165.9	47.3					
H61		33	0.274	23,216.0	6,361.2			1,086.0	297.6	1,086.0	297.6					
H62		34	0.264	23,216.0	6,129.0			165.9	43.8	165.9	43.8					
H63		35	0.253	23,216.0	5,873.6			165.9	42.0	165.9	42.0					
H64		36	0.244	23,216.0	5,664.7			165.9	40.5	165.9	40.5					
H65		37	0.234	23,216.0	5,432.5			165.9	38.8	165.9	38.8					
H66		38	0.225	23,216.0	5,223.6			165.9	37.3	165.9	37.3					
H67		39	0.217	23,216.0	5,037.9			165.9	36.0	165.9	36.0					
H68		40	0.208	23,216.0	4,828.9			165.9	34.5	165.9	34.5					
H69		41	0.200	23,216.0	4,643.2			165.9	33.2	165.9	33.2					
H70		42	0.193	23,216.0	4,480.7			165.9	32.0	165.9	32.0					
H71		43	0.185	23,216.0	4,295.0			165.9	30.7	165.9	30.7					
H72		44	0.178	23,216.0	4,132.4			165.9	29.5	165.9	29.5					
H73		45	0.171	23,216.0	3,969.9			165.9	28.4	165.9	28.4					
H74		46	0.165	23,216.0	3,830.6			165.9	27.4	165.9	27.4					
H75		47	0.158	23,216.0	3,668.1			165.9	26.2	165.9	26.2					
H76		48	0.152	23,216.0	3,528.8			1,086.0	165.1	1,086.0	165.1					
H77		49	0.146	23,216.0	3,389.5			165.9	24.2	165.9	24.2					
H78		50	0.141	23,216.0	3,273.5			165.9	23.4	165.9	23.4					
H79		51	0.135	23,216.0	3,134.2			165.9	22.4	165.9	22.4					
H80		52	0.130	23,216.0	3,018.1			165.9	21.6	165.9	21.6					
H81		53	0.125	23,216.0	2,902.0			165.9	20.7	165.9	20.7					
H82		54	0.120	23,216.0	2,785.9			165.9	19.9	165.9	19.9					
H83		55	0.116	23,216.0	2,693.1			165.9	19.2	165.9	19.2					
H84		56	0.111	23,216.0	2,577.0			165.9	18.4	165.9	18.4					
H85		57	0.107	23,216.0	2,484.1			165.9	17.8	165.9	17.8					
H86		58	0.103	23,216.0	2,391.2			165.9	17.1	165.9	17.1					
H87		59	0.099	23,216.0	2,298.4			165.9	16.4	165.9	16.4					
H88		60	0.095	23,216.0	2,205.5			165.9	15.8	165.9	15.8					
H89		61	0.091	23,216.0	2,112.7			165.9	15.1	165.9	15.1					
H90		62	0.088	23,216.0	2,043.0			165.9	14.6	165.9	14.6					
H91		63	0.085	23,216.0	1,973.4			1,086.0	92.3	1,086.0	92.3					
H92		64	0.081	23,216.0	1,880.5			165.9	13.4	165.9	13.4					
H93		65	0.078	23,216.0	1,810.8			165.9	12.9	165.9	12.9					
H94		66	0.075	23,216.0	1,741.2			165.9	12.4	165.9	12.4					
H95		67	0.072	23,216.0	1,671.6			165.9	11.9	165.9	11.9					
H96		68	0.069	23,216.0	1,601.9			165.9	11.4	165.9	11.4					
H97		69	0.067	23,216.0	1,555.5			165.9	11.1	165.9	11.1					
H98		70	0.064	23,216.0	1,485.8			165.9	10.6	165.9	10.6					
H99	71	0.062	23,216.0	1,439.4			165.9	10.3	165.9	10.3						
H100	72	0.059	23,216.0	1,369.7			165.9	9.8	165.9	9.8						
H101	73	0.057	23,216.0	1,323.3			165.9	9.5	165.9	9.5						
H102	74	0.055	23,216.0	1,276.9			165.9	9.1	165.9	9.1						
H103	75	0.053	23,216.0	1,230.4			165.9	8.8	165.9	8.8						
H104	76	0.051	23,216.0	1,184.0			165.9	8.5	165.9	8.5						
H105	77	0.049	23,216.0	1,137.6			165.9	8.1	165.9	8.1						
H106	78	0.047	23,216.0	1,091.2			165.9	7.8	165.9	7.8						
H107	79	0.045	23,216.0	1,044.7			165.9	7.5	165.9	7.5						
H108	80	0.043	23,216.0	998.3			165.9	7.1	165.9	7.1						
合 計				1,636,049.3	385,342.9	369.7	385,712.6	52,391.6	42,151.1	16,687.0	5,058.4	69,078.6	47,209.5	8.2	338,503.1	

様式－５ 費用対便益（残事業・残工期-10%）

水系名：由良川水系 河川名：由良川

事業費： 52,391
単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			費 用 (C)						費用便益比 B／C	純現在価値 B－C	
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用			現在価値
評価年	H28	0	1.000	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0		
整備期間 (2 4 年)	H29	1	0.962	0.0	0.0			13,641.4	13,123.0	0.0	0.0	13,641.4	13,123.0		
	H30	2	0.925	1,547.4	1,431.4			14,113.7	13,055.2	596.6	551.9	14,710.3	13,607.1		
	H31	3	0.889	3,880.8	3,450.0			7,345.3	6,530.0	660.8	587.5	8,006.1	7,117.5		
	H32	4	0.855	5,698.0	4,871.7			1,750.5	1,496.7	512.7	438.4	2,263.2	1,935.1		
	H33	5	0.822	6,293.8	5,173.5			969.4	796.8	164.3	135.1	1,133.7	931.9		
	H34	6	0.790	7,675.6	6,063.7			922.1	728.5	108.2	85.5	1,030.3	814.0		
	H35	7	0.760	9,841.3	7,479.4			922.1	700.8	101.7	77.3	1,023.8	778.1		
	H36	8	0.731	12,007.0	8,777.1			922.1	674.1	101.7	74.3	1,023.8	748.4		
	H37	9	0.703	14,172.6	9,963.3			922.1	648.2	101.7	71.5	1,023.8	719.7		
	H38	10	0.676	16,338.2	11,044.6			922.1	623.3	101.7	68.7	1,023.8	692.0		
	H39	11	0.650	18,504.2	12,027.7			892.8	580.3	101.7	66.1	994.5	646.4		
	H40	12	0.625	20,045.9	12,528.7			834.0	521.3	101.4	63.4	935.4	584.7		
	H41	13	0.601	20,337.4	12,222.8			834.0	501.2	170.8	102.7	1,004.8	603.9		
	H42	14	0.577	20,629.0	11,902.9			834.0	481.2	170.8	98.6	1,004.8	579.8		
	H43	15	0.555	20,920.5	11,610.9			834.0	462.9	170.8	94.8	1,004.8	557.7		
	H44	16	0.534	21,212.1	11,327.3			782.2	417.7	170.8	91.2	953.0	508.9		
	H45	17	0.513	21,485.6	11,022.1			775.7	397.9	166.7	85.5	942.4	483.4		
	H46	18	0.494	21,756.7	10,747.8			775.7	383.2	1,086.3	536.6	1,862.0	919.8		
	H47	19	0.475	22,028.0	10,463.3			775.7	368.5	166.2	78.9	941.9	447.4		
	H48	20	0.456	22,299.2	10,168.4			650.1	296.4	166.2	75.8	816.3	372.2		
	H49	21	0.439	22,526.5	9,889.1			493.1	216.5	156.3	68.6	649.4	285.1		
	H50	22	0.422	22,698.9	9,578.9			493.1	208.1	143.9	60.7	637.0	268.8		
	H51	23	0.406	22,871.2	9,285.7			493.1	200.2	148.2	60.2	641.3	260.4		
	H52	24	0.390	23,043.6	8,987.0			493.1	192.3	148.2	57.8	641.3	250.1		
	施設完成後の評価期間 (5 0 年)	H53	25	0.375	23,216.0	8,706.0					148.2	55.6	148.2	55.6	
H54		26	0.361	23,216.0	8,381.0					200.4	72.3	200.4	72.3		
H55		27	0.347	23,216.0	8,056.0					200.4	69.5	200.4	69.5		
H56		28	0.333	23,216.0	7,730.9					200.4	66.7	200.4	66.7		
H57		29	0.321	23,216.0	7,452.3					200.4	64.3	200.4	64.3		
H58		30	0.308	23,216.0	7,150.5					200.4	61.7	200.4	61.7		
H59		31	0.296	23,216.0	6,871.9					200.4	59.3	200.4	59.3		
H60		32	0.285	23,216.0	6,616.6					200.4	57.1	200.4	57.1		
H61		33	0.274	23,216.0	6,361.2					1,120.5	307.0	1,120.5	307.0		
H62		34	0.264	23,216.0	6,129.0					200.4	52.9	200.4	52.9		
H63		35	0.253	23,216.0	5,873.6					200.4	50.7	200.4	50.7		
H64		36	0.244	23,216.0	5,664.7					200.4	48.9	200.4	48.9		
H65		37	0.234	23,216.0	5,432.5					200.4	46.9	200.4	46.9		
H66		38	0.225	23,216.0	5,223.6					200.4	45.1	200.4	45.1		
H67		39	0.217	23,216.0	5,037.9					200.4	43.5	200.4	43.5		
H68		40	0.208	23,216.0	4,828.9					200.4	41.7	200.4	41.7		
H69		41	0.200	23,216.0	4,643.2					200.4	40.1	200.4	40.1		
H70		42	0.193	23,216.0	4,480.7					200.4	38.7	200.4	38.7		
H71		43	0.185	23,216.0	4,295.0					200.4	37.1	200.4	37.1		
H72		44	0.178	23,216.0	4,132.4					200.4	35.7	200.4	35.7		
H73		45	0.171	23,216.0	3,969.9					200.4	34.3	200.4	34.3		
H74		46	0.165	23,216.0	3,830.6					200.4	33.1	200.4	33.1		
H75		47	0.158	23,216.0	3,668.1					200.4	31.7	200.4	31.7		
H76		48	0.152	23,216.0	3,528.8					1,120.5	170.3	1,120.5	170.3		
H77		49	0.146	23,216.0	3,389.5					200.4	29.3	200.4	29.3		
H78		50	0.141	23,216.0	3,273.5					200.4	28.3	200.4	28.3		
H79		51	0.135	23,216.0	3,134.2					200.4	27.1	200.4	27.1		
H80		52	0.130	23,216.0	3,018.1					200.4	26.1	200.4	26.1		
H81		53	0.125	23,216.0	2,902.0					200.4	25.1	200.4	25.1		
H82		54	0.120	23,216.0	2,785.9					200.4	24.0	200.4	24.0		
H83		55	0.116	23,216.0	2,693.1					200.4	23.2	200.4	23.2		
H84		56	0.111	23,216.0	2,577.0					200.4	22.2	200.4	22.2		
H85		57	0.107	23,216.0	2,484.1					200.4	21.4	200.4	21.4		
H86		58	0.103	23,216.0	2,391.2					200.4	20.6	200.4	20.6		
H87		59	0.099	23,216.0	2,298.4					200.4	19.8	200.4	19.8		
H88		60	0.095	23,216.0	2,205.5					200.4	19.0	200.4	19.0		
H89		61	0.091	23,216.0	2,112.7					200.4	18.2	200.4	18.2		
H90		62	0.088	23,216.0	2,043.0					200.4	17.6	200.4	17.6		
H91		63	0.085	23,216.0	1,973.4					1,120.5	95.2	1,120.5	95.2		
H92		64	0.081	23,216.0	1,880.5					200.4	16.2	200.4	16.2		
H93		65	0.078	23,216.0	1,810.8					200.4	15.6	200.4	15.6		
H94		66	0.075	23,216.0	1,741.2					200.4	15.0	200.4	15.0		
H95		67	0.072	23,216.0	1,671.6					200.4	14.4	200.4	14.4		
H96		68	0.069	23,216.0	1,601.9					200.4	13.8	200.4	13.8		
H97		69	0.067	23,216.0	1,555.5					200.4	13.4	200.4	13.4		
H98		70	0.064	23,216.0	1,485.8					200.4	12.8	200.4	12.8		
H99		71	0.062	23,216.0	1,439.4					200.4	12.4	200.4	12.4		
H100		72	0.059	23,216.0	1,369.7					200.4	11.8	200.4	11.8		
H101		73	0.057	23,216.0	1,323.3					200.4	11.4	200.4	11.4		
H102		74	0.055	23,216.0	1,276.9					200.4	11.0	200.4	11.0		
合 計				1,538,613.3	404,520.8	472.8	404,993.6	52,391.4	43,604.3	18,245.8	5,760.2	70,637.2	49,364.5	8.2	355,629.1

様式－５ 費用対便益（残事業・資産+10%）

水系名：由良川水系 河川名：由良川

事業費： 52,391
単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)				費 用 (C)						費用便益比 B / C	純現在価値 B - C
				便益①		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用	現在価値		
評価年	H28	0	1.000	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0		
整備期間 (27年)	H29	1	0.962	0.0	0.0			11,937.9	11,484.3	0.0	0.0	11,937.9	11,484.3		
	H30	2	0.925	1,415.7	1,309.5			13,627.4	12,605.3	526.2	486.7	14,153.6	13,092.0		
	H31	3	0.889	3,687.7	3,278.4			8,759.0	7,786.8	578.3	514.1	9,337.3	8,300.9		
	H32	4	0.855	5,981.6	5,114.3			2,069.3	1,769.3	593.2	507.2	2,662.5	2,276.5		
	H33	5	0.822	6,715.1	5,519.8			914.2	751.5	189.5	155.8	1,103.7	907.3		
	H34	6	0.790	7,107.5	5,614.9			819.6	647.5	107.4	84.8	927.0	732.3		
	H35	7	0.760	9,218.3	7,005.9			819.6	622.9	94.3	71.7	913.9	694.6		
	H36	8	0.731	11,329.0	8,281.5			819.6	599.1	94.3	68.9	913.9	668.0		
	H37	9	0.703	13,439.8	9,448.2			819.6	576.2	94.3	66.3	913.9	642.5		
	H38	10	0.676	15,550.6	10,512.2			819.6	554.0	94.3	63.7	913.9	617.7		
	H39	11	0.650	17,661.4	11,479.9			819.6	532.7	94.3	61.3	913.9	594.0		
	H40	12	0.625	19,772.0	12,357.5			819.6	512.3	94.3	58.9	913.9	571.2		
	H41	13	0.601	21,883.8	13,152.2			741.3	445.5	94.3	56.7	835.6	502.2		
	H42	14	0.577	22,168.5	12,791.2			741.3	427.7	157.7	91.0	899.0	518.7		
	H43	15	0.555	22,453.2	12,461.5			741.3	411.4	157.7	87.5	899.0	498.9		
	H44	16	0.534	22,737.9	12,142.0			741.3	395.9	157.7	84.2	899.0	480.1		
	H45	17	0.513	23,022.5	11,810.5			741.3	380.3	157.7	80.9	899.0	461.2		
	H46	18	0.494	23,307.2	11,513.8			689.5	340.6	1,077.8	532.4	1,767.3	873.0		
	H47	19	0.475	23,572.0	11,196.7			689.5	327.5	153.6	73.0	843.1	400.5		
	H48	20	0.456	23,836.8	10,869.6			689.5	314.4	153.6	70.0	843.1	384.4		
	H49	21	0.439	24,101.6	10,580.6			689.5	302.7	153.6	67.4	843.1	370.1		
	H50	22	0.422	24,366.3	10,282.6			689.5	291.0	153.6	64.8	843.1	355.8		
	H51	23	0.406	24,631.1	10,000.2			438.3	177.9	153.6	62.4	591.9	240.3		
	H52	24	0.390	24,799.4	9,671.8			438.3	170.9	133.7	52.1	572.0	223.0		
	H53	25	0.375	24,967.8	9,362.9			438.3	164.4	133.7	50.1	572.0	214.5		
	H54	26	0.361	25,136.1	9,074.1			438.3	158.2	133.7	48.3	572.0	206.5		
	H55	27	0.347	25,304.4	8,780.6			438.3	152.1	133.7	46.4	572.0	198.5		
	施設完成後の 評価期間 (50年)	H56	28	0.333	25,472.7	8,482.4			133.7	44.5	133.7	44.5			
H57		29	0.321	25,472.7	8,176.7			183.5	58.9	183.5	58.9				
H58		30	0.308	25,472.7	7,845.6			183.5	56.5	183.5	56.5				
H59		31	0.296	25,472.7	7,539.9			183.5	54.3	183.5	54.3				
H60		32	0.285	25,472.7	7,259.7			183.5	52.3	183.5	52.3				
H61		33	0.274	25,472.7	6,979.5			1,103.6	302.4	1,103.6	302.4				
H62		34	0.264	25,472.7	6,724.8			183.5	48.4	183.5	48.4				
H63		35	0.253	25,472.7	6,444.6			183.5	46.4	183.5	46.4				
H64		36	0.244	25,472.7	6,215.3			183.5	44.8	183.5	44.8				
H65		37	0.234	25,472.7	5,960.6			183.5	42.9	183.5	42.9				
H66		38	0.225	25,472.7	5,731.4			183.5	41.3	183.5	41.3				
H67		39	0.217	25,472.7	5,527.6			183.5	39.8	183.5	39.8				
H68		40	0.208	25,472.7	5,298.3			183.5	38.2	183.5	38.2				
H69		41	0.200	25,472.7	5,094.5			183.5	36.7	183.5	36.7				
H70		42	0.193	25,472.7	4,916.2			183.5	35.4	183.5	35.4				
H71		43	0.185	25,472.7	4,712.4			183.5	33.9	183.5	33.9				
H72		44	0.178	25,472.7	4,534.1			183.5	32.7	183.5	32.7				
H73		45	0.171	25,472.7	4,355.8			183.5	31.4	183.5	31.4				
H74		46	0.165	25,472.7	4,203.0			183.5	30.3	183.5	30.3				
H75		47	0.158	25,472.7	4,024.7			183.5	29.0	183.5	29.0				
H76		48	0.152	25,472.7	3,871.9			1,103.6	167.7	1,103.6	167.7				
H77		49	0.146	25,472.7	3,719.0			183.5	26.8	183.5	26.8				
H78		50	0.141	25,472.7	3,591.7			183.5	25.9	183.5	25.9				
H79		51	0.135	25,472.7	3,438.8			183.5	24.8	183.5	24.8				
H80		52	0.130	25,472.7	3,311.5			183.5	23.9	183.5	23.9				
H81		53	0.125	25,472.7	3,184.1			183.5	22.9	183.5	22.9				
H82		54	0.120	25,472.7	3,056.7			183.5	22.0	183.5	22.0				
H83		55	0.116	25,472.7	2,954.8			183.5	21.3	183.5	21.3				
H84		56	0.111	25,472.7	2,827.5			183.5	20.4	183.5	20.4				
H85		57	0.107	25,472.7	2,725.6			183.5	19.6	183.5	19.6				
H86		58	0.103	25,472.7	2,623.7			183.5	18.9	183.5	18.9				
H87		59	0.099	25,472.7	2,521.8			183.5	18.2	183.5	18.2				
H88		60	0.095	25,472.7	2,419.9			183.5	17.4	183.5	17.4				
H89		61	0.091	25,472.7	2,318.0			183.5	16.7	183.5	16.7				
H90		62	0.088	25,472.7	2,241.6			183.5	16.1	183.5	16.1				
H91		63	0.085	25,472.7	2,165.2			1,103.6	93.8	1,103.6	93.8				
H92		64	0.081	25,472.7	2,063.3			183.5	14.9	183.5	14.9				
H93		65	0.078	25,472.7	1,986.9			183.5	14.3	183.5	14.3				
H94		66	0.075	25,472.7	1,910.5			183.5	13.8	183.5	13.8				
H95		67	0.072	25,472.7	1,834.0			183.5	13.2	183.5	13.2				
H96		68	0.069	25,472.7	1,757.6			183.5	12.7	183.5	12.7				
H97		69	0.067	25,472.7	1,706.7			183.5	12.3	183.5	12.3				
H98		70	0.064	25,472.7	1,630.3			183.5	11.7	183.5	11.7				
H99		71	0.062	25,472.7	1,579.3			183.5	11.4	183.5	11.4				
H100		72	0.059	25,472.7	1,502.9			183.5	10.8	183.5	10.8				
H101		73	0.057	25,472.7	1,451.9			183.5	10.5	183.5	10.5				
H102		74	0.055	25,472.7	1,401.0			183.5	10.1	183.5	10.1				
H103		75	0.053	25,472.7	1,350.1			183.5	9.7	183.5	9.7				
H104		76	0.051	25,472.7	1,299.1			183.5	9.4	183.5	9.4				
H105		77	0.049	25,472.7	1,248.2			183.5	9.0	183.5	9.0				
合 計				1,741,802.3	433,333.1	421.3	433,754.4	52,390.5	42,902.4	17,551.6	5,426.9	69,942.1	48,329.3	9.0	385,425.1

様式－５ 費用対便益（残事業・資産-10%）

水系名：由良川水系 河川名：由良川

事業費： 52,391
単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)				費 用 (C)						費用便益比 B / C	純現在価値 B - C
				便益①		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用	現在価値		
評価年	H28	0	1.000	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0		
整備期間（27年）	H29	1	0.962	0.0	0.0			11,937.9	11,484.3	0.0	0.0	11,937.9	11,484.3		
	H30	2	0.925	1,161.7	1,074.6			13,627.4	12,605.3	526.2	486.7	14,153.6	13,092.0		
	H31	3	0.889	3,028.9	2,692.7			8,759.0	7,786.8	578.3	514.1	9,337.3	8,300.9		
	H32	4	0.855	4,913.3	4,200.9			2,069.3	1,769.3	593.2	507.2	2,662.5	2,276.5		
	H33	5	0.822	5,515.2	4,533.5			914.2	751.5	189.5	155.8	1,103.7	907.3		
	H34	6	0.790	5,837.1	4,611.3			819.6	647.5	107.4	84.8	927.0	732.3		
	H35	7	0.760	7,576.4	5,758.1			819.6	622.9	94.3	71.7	913.9	694.6		
	H36	8	0.731	9,315.8	6,809.8			819.6	599.1	94.3	68.9	913.9	668.0		
	H37	9	0.703	11,055.1	7,771.7			819.6	576.2	94.3	66.3	913.9	642.5		
	H38	10	0.676	12,794.5	8,649.1			819.6	554.0	94.3	63.7	913.9	617.7		
	H39	11	0.650	14,533.8	9,447.0			819.6	532.7	94.3	61.3	913.9	594.0		
	H40	12	0.625	16,273.2	10,170.8			819.6	512.3	94.3	58.9	913.9	571.2		
	H41	13	0.601	18,013.3	10,826.0			741.3	445.5	94.3	56.7	835.6	502.2		
	H42	14	0.577	18,247.0	10,528.5			741.3	427.7	157.7	91.0	899.0	518.7		
	H43	15	0.555	18,480.7	10,256.8			741.3	411.4	157.7	87.5	899.0	498.9		
	H44	16	0.534	18,714.3	9,993.4			741.3	395.9	157.7	84.2	899.0	480.1		
	H45	17	0.513	18,948.0	9,720.3			741.3	380.3	157.7	80.9	899.0	461.2		
	H46	18	0.494	19,181.7	9,475.8			689.5	340.6	1,077.8	532.4	1,767.3	873.0		
	H47	19	0.475	19,399.0	9,214.5			689.5	327.5	153.6	73.0	843.1	400.5		
	H48	20	0.456	19,616.4	8,945.1			689.5	314.4	153.6	70.0	843.1	384.4		
	H49	21	0.439	19,833.7	8,707.0			689.5	302.7	153.6	67.4	843.1	370.1		
	H50	22	0.422	20,051.0	8,461.5			689.5	291.0	153.6	64.8	843.1	355.8		
	H51	23	0.406	20,268.4	8,229.0			438.3	177.9	153.6	62.4	591.9	240.3		
	H52	24	0.390	20,406.6	7,958.6			438.3	170.9	133.7	52.1	572.0	223.0		
	H53	25	0.375	20,544.7	7,704.3			438.3	164.4	133.7	50.1	572.0	214.5		
	H54	26	0.361	20,682.9	7,466.5			438.3	158.2	133.7	48.3	572.0	206.5		
	H55	27	0.347	20,821.0	7,224.9			438.3	152.1	133.7	46.4	572.0	198.5		
	施設完成後の評価期間（50年）	H56	28	0.333	20,959.2	6,979.4					133.7	44.5	133.7	44.5	
H57		29	0.321	20,959.2	6,727.9	183.5					58.9	183.5	58.9		
H58		30	0.308	20,959.2	6,455.4	183.5					56.5	183.5	56.5		
H59		31	0.296	20,959.2	6,203.9	183.5					54.3	183.5	54.3		
H60		32	0.285	20,959.2	5,973.4	183.5					52.3	183.5	52.3		
H61		33	0.274	20,959.2	5,742.8	1,103.6					302.4	1,103.6	302.4		
H62		34	0.264	20,959.2	5,533.2	183.5					48.4	183.5	48.4		
H63		35	0.253	20,959.2	5,302.7	183.5					46.4	183.5	46.4		
H64		36	0.244	20,959.2	5,114.0	183.5					44.8	183.5	44.8		
H65		37	0.234	20,959.2	4,904.5	183.5					42.9	183.5	42.9		
H66		38	0.225	20,959.2	4,715.8	183.5					41.3	183.5	41.3		
H67		39	0.217	20,959.2	4,548.1	183.5					39.8	183.5	39.8		
H68		40	0.208	20,959.2	4,359.5	183.5					38.2	183.5	38.2		
H69		41	0.200	20,959.2	4,191.8	183.5					36.7	183.5	36.7		
H70		42	0.193	20,959.2	4,045.1	183.5					35.4	183.5	35.4		
H71		43	0.185	20,959.2	3,877.5	183.5					33.9	183.5	33.9		
H72		44	0.178	20,959.2	3,730.7	183.5					32.7	183.5	32.7		
H73		45	0.171	20,959.2	3,584.0	183.5					31.4	183.5	31.4		
H74		46	0.165	20,959.2	3,458.3	183.5					30.3	183.5	30.3		
H75		47	0.158	20,959.2	3,311.6	183.5					29.0	183.5	29.0		
H76		48	0.152	20,959.2	3,185.8	1,103.6					167.7	1,103.6	167.7		
H77		49	0.146	20,959.2	3,060.0	183.5					26.8	183.5	26.8		
H78		50	0.141	20,959.2	2,955.2	183.5					25.9	183.5	25.9		
H79		51	0.135	20,959.2	2,829.5	183.5					24.8	183.5	24.8		
H80		52	0.130	20,959.2	2,724.7	183.5					23.9	183.5	23.9		
H81		53	0.125	20,959.2	2,619.9	183.5					22.9	183.5	22.9		
H82		54	0.120	20,959.2	2,515.1	183.5					22.0	183.5	22.0		
H83		55	0.116	20,959.2	2,431.3	183.5					21.3	183.5	21.3		
H84		56	0.111	20,959.2	2,326.5	183.5					20.4	183.5	20.4		
H85		57	0.107	20,959.2	2,242.6	183.5					19.6	183.5	19.6		
H86		58	0.103	20,959.2	2,158.8	183.5					18.9	183.5	18.9		
H87		59	0.099	20,959.2	2,075.0	183.5					18.2	183.5	18.2		
H88		60	0.095	20,959.2	1,991.1	183.5					17.4	183.5	17.4		
H89		61	0.091	20,959.2	1,907.3	183.5					16.7	183.5	16.7		
H90		62	0.088	20,959.2	1,844.4	183.5					16.1	183.5	16.1		
H91		63	0.085	20,959.2	1,781.5	1,103.6					93.8	1,103.6	93.8		
H92		64	0.081	20,959.2	1,697.7	183.5					14.9	183.5	14.9		
H93		65	0.078	20,959.2	1,634.8	183.5					14.3	183.5	14.3		
H94		66	0.075	20,959.2	1,571.9	183.5					13.8	183.5	13.8		
H95		67	0.072	20,959.2	1,509.1	183.5					13.2	183.5	13.2		
H96		68	0.069	20,959.2	1,446.2	183.5					12.7	183.5	12.7		
H97		69	0.067	20,959.2	1,404.3	183.5					12.3	183.5	12.3		
H98		70	0.064	20,959.2	1,341.4	183.5					11.7	183.5	11.7		
H99		71	0.062	20,959.2	1,299.5	183.5					11.4	183.5	11.4		
H100		72	0.059	20,959.2	1,236.6	183.5					10.8	183.5	10.8		
H101		73	0.057	20,959.2	1,194.7	183.5					10.5	183.5	10.5		
H102		74	0.055	20,959.2	1,152.8	183.5					10.1	183.5	10.1		
H103		75	0.053	20,959.2	1,110.8	183.5					9.7	183.5	9.7		
H104		76	0.051	20,959.2	1,068.9	183.5					9.4	183.5	9.4		
H105		77	0.049	20,959.2	1,027.0	183.5					9.0	183.5	9.0		
合 計				1,433,173.7	356,535.7	421.3	356,957.0	52,390.5	42,902.4	17,551.6	5,426.9	69,942.1	48,329.3	7.4	308,627.7

様式－５ 費用対便益（当面事業）

水系名：由良川水系 河川名：由良川

事業費：37,308

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			費 用 (C)						費用便益比 B / C	純現在価値 B - C	
				便益①		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用			現在価値
評価年	H28	0	1.000	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0		
(整備期間)	H29	1	0.962	0.0	0.0			11,937.9	11,484.3	0.0	0.0	11,937.9	11,484.3		
	H30	2	0.925	1,288.7	1,192.0			13,627.4	12,605.3	526.2	486.7	14,153.6	13,092.0		
	H31	3	0.889	3,358.5	2,985.7			8,759.0	7,786.8	578.3	514.1	9,337.3	8,300.9		
	H32	4	0.855	5,447.6	4,657.7			2,069.3	1,769.3	593.2	507.2	2,662.5	2,276.5		
	H33	5	0.822	6,115.2	5,026.7			914.2	751.5	189.5	155.8	1,103.7	907.3		
施設完成後の評価期間（50年）	H34	6	0.790	6,472.4	5,113.2					107.4	84.8	107.4	84.8		
	H35	7	0.760	6,472.4	4,919.0					413.7	314.4	413.7	314.4		
	H36	8	0.731	6,472.4	4,731.3					413.7	302.4	413.7	302.4		
	H37	9	0.703	6,472.4	4,550.1					413.7	290.8	413.7	290.8		
	H38	10	0.676	6,472.4	4,375.3					413.7	279.7	413.7	279.7		
	H39	11	0.650	6,472.4	4,207.1					413.7	268.9	413.7	268.9		
	H40	12	0.625	6,472.4	4,045.3					413.7	258.6	413.7	258.6		
	H41	13	0.601	6,472.4	3,889.9					413.7	248.6	413.7	248.6		
	H42	14	0.577	6,472.4	3,734.6					413.7	238.7	413.7	238.7		
	H43	15	0.555	6,472.4	3,592.2					413.7	229.6	413.7	229.6		
	H44	16	0.534	6,472.4	3,456.3					413.7	220.9	413.7	220.9		
	H45	17	0.513	6,472.4	3,320.3					413.7	212.2	413.7	212.2		
	H46	18	0.494	6,472.4	3,197.4					1,333.8	658.9	1,333.8	658.9		
	H47	19	0.475	6,472.4	3,074.4					413.7	196.5	413.7	196.5		
	H48	20	0.456	6,472.4	2,951.4					413.7	188.6	413.7	188.6		
	H49	21	0.439	6,472.4	2,841.4					413.7	181.6	413.7	181.6		
	H50	22	0.422	6,472.4	2,731.4					413.7	174.6	413.7	174.6		
	H51	23	0.406	6,472.4	2,627.8					413.7	168.0	413.7	168.0		
	H52	24	0.390	6,472.4	2,524.2					413.7	161.3	413.7	161.3		
	H53	25	0.375	6,472.4	2,427.2					413.7	155.1	413.7	155.1		
	H54	26	0.361	6,472.4	2,336.5					413.7	149.3	413.7	149.3		
	H55	27	0.347	6,472.4	2,245.9					413.7	143.6	413.7	143.6		
	H56	28	0.333	6,472.4	2,155.3					413.7	137.8	413.7	137.8		
	H57	29	0.321	6,472.4	2,077.6					413.7	132.8	413.7	132.8		
	H58	30	0.308	6,472.4	1,993.5					413.7	127.4	413.7	127.4		
	H59	31	0.296	6,472.4	1,915.8					413.7	122.5	413.7	122.5		
	H60	32	0.285	6,472.4	1,844.6					413.7	117.9	413.7	117.9		
	H61	33	0.274	6,472.4	1,773.4					1,333.8	365.5	1,333.8	365.5		
	H62	34	0.264	6,472.4	1,708.7					413.7	109.2	413.7	109.2		
	H63	35	0.253	6,472.4	1,637.5					413.7	104.7	413.7	104.7		
	H64	36	0.244	6,472.4	1,579.3					413.7	100.9	413.7	100.9		
	H65	37	0.234	6,472.4	1,514.5					413.7	96.8	413.7	96.8		
	H66	38	0.225	6,472.4	1,456.3					413.7	93.1	413.7	93.1		
	H67	39	0.217	6,472.4	1,404.5					413.7	89.8	413.7	89.8		
	H68	40	0.208	6,472.4	1,346.3					413.7	86.0	413.7	86.0		
	H69	41	0.200	6,472.4	1,294.5					413.7	82.7	413.7	82.7		
	H70	42	0.193	6,472.4	1,249.2					413.7	79.8	413.7	79.8		
	H71	43	0.185	6,472.4	1,197.4					413.7	76.5	413.7	76.5		
	H72	44	0.178	6,472.4	1,152.1					413.7	73.6	413.7	73.6		
	H73	45	0.171	6,472.4	1,106.8					413.7	70.7	413.7	70.7		
	H74	46	0.165	6,472.4	1,067.9					413.7	68.3	413.7	68.3		
	H75	47	0.158	6,472.4	1,022.6					413.7	65.4	413.7	65.4		
	H76	48	0.152	6,472.4	983.8					1,333.8	202.7	1,333.8	202.7		
	H77	49	0.146	6,472.4	945.0					413.7	60.4	413.7	60.4		
	H78	50	0.141	6,472.4	912.6					413.7	58.3	413.7	58.3		
	H79	51	0.135	6,472.4	873.8					413.7	55.8	413.7	55.8		
	H80	52	0.130	6,472.4	841.4					413.7	53.8	413.7	53.8		
	H81	53	0.125	6,472.4	809.1					413.7	51.7	413.7	51.7		
	H82	54	0.120	6,472.4	776.7					413.7	49.6	413.7	49.6		
	H83	55	0.116	6,472.4	750.8					413.7	48.0	413.7	48.0		
合 計				339,830.0	128,145.3	778.3	128,923.6	37,307.8	34,397.2	25,026.2	9,572.6	62,334.0	43,969.8	2.9	84,953.8

様式－５ 費用対便益（当面事業・残事業費+10%）

水系名：由良川水系 河川名：由良川

事業費： 41,039
単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)				費 用 (C)						費用便益比 B / C	純現在価値 B - C
				便益①		残存価値 ②	計 ① + ②	建設費③		維持管理費④		計③ + ④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用	現在価値		
評価年	H28	0	1.000	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0		
(整備期間)	H29	1	0.962	0.0	0.0			13,131.7	12,632.7	0.0	0.0	13,131.7	12,632.7		
	H30	2	0.925	1,288.7	1,192.0			14,990.1	13,865.9	526.2	486.7	15,516.3	14,352.6		
	H31	3	0.889	3,358.5	2,985.7			9,634.9	8,565.4	578.3	514.1	10,213.2	9,079.5		
	H32	4	0.855	5,447.6	4,657.7			2,276.2	1,946.2	593.2	507.2	2,869.4	2,453.4		
	H33	5	0.822	6,115.2	5,026.7			1,005.6	826.6	189.5	155.8	1,195.1	982.4		
施設完成後の評価期間 (50年)	H34	6	0.790	6,472.4	5,113.2					107.4	84.8	107.4	84.8		
	H35	7	0.760	6,472.4	4,919.0					413.7	314.4	413.7	314.4		
	H36	8	0.731	6,472.4	4,731.3					413.7	302.4	413.7	302.4		
	H37	9	0.703	6,472.4	4,550.1					413.7	290.8	413.7	290.8		
	H38	10	0.676	6,472.4	4,375.3					413.7	279.7	413.7	279.7		
	H39	11	0.650	6,472.4	4,207.1					413.7	268.9	413.7	268.9		
	H40	12	0.625	6,472.4	4,045.3					413.7	258.6	413.7	258.6		
	H41	13	0.601	6,472.4	3,889.9					413.7	248.6	413.7	248.6		
	H42	14	0.577	6,472.4	3,734.6					413.7	238.7	413.7	238.7		
	H43	15	0.555	6,472.4	3,592.2					413.7	229.6	413.7	229.6		
	H44	16	0.534	6,472.4	3,456.3					413.7	220.9	413.7	220.9		
	H45	17	0.513	6,472.4	3,320.3					413.7	212.2	413.7	212.2		
	H46	18	0.494	6,472.4	3,197.4					1,333.8	658.9	1,333.8	658.9		
	H47	19	0.475	6,472.4	3,074.4					413.7	196.5	413.7	196.5		
	H48	20	0.456	6,472.4	2,951.4					413.7	188.6	413.7	188.6		
	H49	21	0.439	6,472.4	2,841.4					413.7	181.6	413.7	181.6		
	H50	22	0.422	6,472.4	2,731.4					413.7	174.6	413.7	174.6		
	H51	23	0.406	6,472.4	2,627.8					413.7	168.0	413.7	168.0		
	H52	24	0.390	6,472.4	2,524.2					413.7	161.3	413.7	161.3		
	H53	25	0.375	6,472.4	2,427.2					413.7	155.1	413.7	155.1		
	H54	26	0.361	6,472.4	2,336.5					413.7	149.3	413.7	149.3		
	H55	27	0.347	6,472.4	2,245.9					413.7	143.6	413.7	143.6		
	H56	28	0.333	6,472.4	2,155.3					413.7	137.8	413.7	137.8		
	H57	29	0.321	6,472.4	2,077.6					413.7	132.8	413.7	132.8		
	H58	30	0.308	6,472.4	1,993.5					413.7	127.4	413.7	127.4		
	H59	31	0.296	6,472.4	1,915.8					413.7	122.5	413.7	122.5		
	H60	32	0.285	6,472.4	1,844.6					413.7	117.9	413.7	117.9		
	H61	33	0.274	6,472.4	1,773.4					1,333.8	365.5	1,333.8	365.5		
	H62	34	0.264	6,472.4	1,708.7					413.7	109.2	413.7	109.2		
	H63	35	0.253	6,472.4	1,637.5					413.7	104.7	413.7	104.7		
	H64	36	0.244	6,472.4	1,579.3					413.7	100.9	413.7	100.9		
	H65	37	0.234	6,472.4	1,514.5					413.7	96.8	413.7	96.8		
	H66	38	0.225	6,472.4	1,456.3					413.7	93.1	413.7	93.1		
	H67	39	0.217	6,472.4	1,404.5					413.7	89.8	413.7	89.8		
	H68	40	0.208	6,472.4	1,346.3					413.7	86.0	413.7	86.0		
	H69	41	0.200	6,472.4	1,294.5					413.7	82.7	413.7	82.7		
	H70	42	0.193	6,472.4	1,249.2					413.7	79.8	413.7	79.8		
	H71	43	0.185	6,472.4	1,197.4					413.7	76.5	413.7	76.5		
	H72	44	0.178	6,472.4	1,152.1					413.7	73.6	413.7	73.6		
	H73	45	0.171	6,472.4	1,106.8					413.7	70.7	413.7	70.7		
	H74	46	0.165	6,472.4	1,067.9					413.7	68.3	413.7	68.3		
	H75	47	0.158	6,472.4	1,022.6					413.7	65.4	413.7	65.4		
	H76	48	0.152	6,472.4	983.8					1,333.8	202.7	1,333.8	202.7		
	H77	49	0.146	6,472.4	945.0					413.7	60.4	413.7	60.4		
	H78	50	0.141	6,472.4	912.6					413.7	58.3	413.7	58.3		
	H79	51	0.135	6,472.4	873.8					413.7	55.8	413.7	55.8		
	H80	52	0.130	6,472.4	841.4					413.7	53.8	413.7	53.8		
	H81	53	0.125	6,472.4	809.1					413.7	51.7	413.7	51.7		
	H82	54	0.120	6,472.4	776.7					413.7	49.6	413.7	49.6		
	H83	55	0.116	6,472.4	750.8					413.7	48.0	413.7	48.0		
合 計				339,830.0	128,145.3	856.2	129,001.5	41,038.6	37,836.8	25,026.2	9,572.6	66,064.8	47,409.4	2.7	81,592.1

様式－５ 費用対便益（当面事業・残事業費・10%）

水系名：由良川水系 河川名：由良川

事業費： 33,577
単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)				費 用 (C)						費用便益比 B / C	純現在価値 B - C
				便益①		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用	現在価値		
評価年	H28	0	1.000	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0		
(整備期間)	H29	1	0.962	0.0	0.0			10,744.1	10,335.8	0.0	0.0	10,744.1	10,335.8		
	H30	2	0.925	1,288.7	1,192.0			12,264.7	11,344.8	526.2	486.7	12,790.9	11,831.5		
	H31	3	0.889	3,358.5	2,985.7			7,883.1	7,008.1	578.3	514.1	8,461.4	7,522.2		
	H32	4	0.855	5,447.6	4,657.7			1,862.4	1,592.3	593.2	507.2	2,455.6	2,099.5		
	H33	5	0.822	6,115.2	5,026.7	822.8	676.3	189.5	155.8	1,012.3	832.1				
施設完成後の評価期間 (50年)	H34	6	0.790	6,472.4	5,113.2					107.4	84.8	107.4	84.8		
	H35	7	0.760	6,472.4	4,919.0					413.7	314.4	413.7	314.4		
	H36	8	0.731	6,472.4	4,731.3					413.7	302.4	413.7	302.4		
	H37	9	0.703	6,472.4	4,550.1					413.7	290.8	413.7	290.8		
	H38	10	0.676	6,472.4	4,375.3					413.7	279.7	413.7	279.7		
	H39	11	0.650	6,472.4	4,207.1					413.7	268.9	413.7	268.9		
	H40	12	0.625	6,472.4	4,045.3					413.7	258.6	413.7	258.6		
	H41	13	0.601	6,472.4	3,889.9					413.7	248.6	413.7	248.6		
	H42	14	0.577	6,472.4	3,734.6					413.7	238.7	413.7	238.7		
	H43	15	0.555	6,472.4	3,592.2					413.7	229.6	413.7	229.6		
	H44	16	0.534	6,472.4	3,456.3					413.7	220.9	413.7	220.9		
	H45	17	0.513	6,472.4	3,320.3					413.7	212.2	413.7	212.2		
	H46	18	0.494	6,472.4	3,197.4					1,333.8	658.9	1,333.8	658.9		
	H47	19	0.475	6,472.4	3,074.4					413.7	196.5	413.7	196.5		
	H48	20	0.456	6,472.4	2,951.4					413.7	188.6	413.7	188.6		
	H49	21	0.439	6,472.4	2,841.4					413.7	181.6	413.7	181.6		
	H50	22	0.422	6,472.4	2,731.4					413.7	174.6	413.7	174.6		
	H51	23	0.406	6,472.4	2,627.8					413.7	168.0	413.7	168.0		
	H52	24	0.390	6,472.4	2,524.2					413.7	161.3	413.7	161.3		
	H53	25	0.375	6,472.4	2,427.2					413.7	155.1	413.7	155.1		
	H54	26	0.361	6,472.4	2,336.5					413.7	149.3	413.7	149.3		
	H55	27	0.347	6,472.4	2,245.9					413.7	143.6	413.7	143.6		
	H56	28	0.333	6,472.4	2,155.3					413.7	137.8	413.7	137.8		
	H57	29	0.321	6,472.4	2,077.6					413.7	132.8	413.7	132.8		
	H58	30	0.308	6,472.4	1,993.5					413.7	127.4	413.7	127.4		
	H59	31	0.296	6,472.4	1,915.8					413.7	122.5	413.7	122.5		
	H60	32	0.285	6,472.4	1,844.6					413.7	117.9	413.7	117.9		
	H61	33	0.274	6,472.4	1,773.4					1,333.8	365.5	1,333.8	365.5		
	H62	34	0.264	6,472.4	1,708.7					413.7	109.2	413.7	109.2		
	H63	35	0.253	6,472.4	1,637.5					413.7	104.7	413.7	104.7		
	H64	36	0.244	6,472.4	1,579.3					413.7	100.9	413.7	100.9		
	H65	37	0.234	6,472.4	1,514.5					413.7	96.8	413.7	96.8		
	H66	38	0.225	6,472.4	1,456.3					413.7	93.1	413.7	93.1		
	H67	39	0.217	6,472.4	1,404.5					413.7	89.8	413.7	89.8		
	H68	40	0.208	6,472.4	1,346.3					413.7	86.0	413.7	86.0		
	H69	41	0.200	6,472.4	1,294.5					413.7	82.7	413.7	82.7		
	H70	42	0.193	6,472.4	1,249.2					413.7	79.8	413.7	79.8		
	H71	43	0.185	6,472.4	1,197.4					413.7	76.5	413.7	76.5		
	H72	44	0.178	6,472.4	1,152.1					413.7	73.6	413.7	73.6		
	H73	45	0.171	6,472.4	1,106.8					413.7	70.7	413.7	70.7		
	H74	46	0.165	6,472.4	1,067.9					413.7	68.3	413.7	68.3		
	H75	47	0.158	6,472.4	1,022.6					413.7	65.4	413.7	65.4		
	H76	48	0.152	6,472.4	983.8					1,333.8	202.7	1,333.8	202.7		
	H77	49	0.146	6,472.4	945.0					413.7	60.4	413.7	60.4		
	H78	50	0.141	6,472.4	912.6					413.7	58.3	413.7	58.3		
	H79	51	0.135	6,472.4	873.8					413.7	55.8	413.7	55.8		
	H80	52	0.130	6,472.4	841.4					413.7	53.8	413.7	53.8		
	H81	53	0.125	6,472.4	809.1					413.7	51.7	413.7	51.7		
	H82	54	0.120	6,472.4	776.7					413.7	49.6	413.7	49.6		
	H83	55	0.116	6,472.4	750.8					413.7	48.0	413.7	48.0		
合 計				339,830.0	128,145.3	700.4	128,845.7	33,577.0	30,957.3	25,026.2	9,572.6	58,603.2	40,529.9	3.2	88,315.8

様式－５ 費用対便益（当面事業・残工期+10%）

水系名：由良川水系 河川名：由良川

事業費： 37,308

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			費 用 (C)						費用便益比 B／C	純現在価値 B－C	
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用			現在価値
評価年	H28	0	1.000	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0		
(整備 年) 間	H29	1	0.962	0.0	0.0			9,948.3	9,570.3	0.0	0.0	9,948.3	9,570.3		
	H30	2	0.925	1,073.9	993.4			11,074.6	10,244.0	438.4	405.5	11,513.0	10,649.5		
	H31	3	0.889	2,668.6	2,372.4			8,922.0	7,931.7	463.3	411.9	9,385.3	8,343.6		
	H32	4	0.855	4,403.1	3,764.6			5,069.3	4,334.3	486.3	415.8	5,555.6	4,750.1		
	H33	5	0.822	5,670.1	4,660.8			1,532.0	1,259.3	364.1	299.3	1,896.1	1,558.6		
	H34	6	0.790	6,174.7	4,878.0			761.9	601.9	156.2	123.4	918.1	725.3		
施設 完成 後の 評価 期間 (5 0 年)	H35	7	0.760	6,472.4	4,919.0					95.4	72.5	95.4	72.5		
	H36	8	0.731	6,472.4	4,731.3					350.6	256.3	350.6	256.3		
	H37	9	0.703	6,472.4	4,550.1					350.6	246.5	350.6	246.5		
	H38	10	0.676	6,472.4	4,375.3					350.6	237.0	350.6	237.0		
	H39	11	0.650	6,472.4	4,207.1					350.6	227.9	350.6	227.9		
	H40	12	0.625	6,472.4	4,045.3					350.6	219.1	350.6	219.1		
	H41	13	0.601	6,472.4	3,889.9					350.6	210.7	350.6	210.7		
	H42	14	0.577	6,472.4	3,734.6					350.6	202.3	350.6	202.3		
	H43	15	0.555	6,472.4	3,592.2					350.6	194.6	350.6	194.6		
	H44	16	0.534	6,472.4	3,456.3					350.6	187.2	350.6	187.2		
	H45	17	0.513	6,472.4	3,320.3					350.6	179.9	350.6	179.9		
	H46	18	0.494	6,472.4	3,197.4					1,270.7	627.7	1,270.7	627.7		
	H47	19	0.475	6,472.4	3,074.4					350.6	166.5	350.6	166.5		
	H48	20	0.456	6,472.4	2,951.4					350.6	159.9	350.6	159.9		
	H49	21	0.439	6,472.4	2,841.4					350.6	153.9	350.6	153.9		
	H50	22	0.422	6,472.4	2,731.4					350.6	148.0	350.6	148.0		
	H51	23	0.406	6,472.4	2,627.8					350.6	142.3	350.6	142.3		
	H52	24	0.390	6,472.4	2,524.2					350.6	136.7	350.6	136.7		
	H53	25	0.375	6,472.4	2,427.2					350.6	131.5	350.6	131.5		
	H54	26	0.361	6,472.4	2,336.5					350.6	126.6	350.6	126.6		
	H55	27	0.347	6,472.4	2,245.9					350.6	121.7	350.6	121.7		
	H56	28	0.333	6,472.4	2,155.3					350.6	116.7	350.6	116.7		
	H57	29	0.321	6,472.4	2,077.6					350.6	112.5	350.6	112.5		
	H58	30	0.308	6,472.4	1,993.5					350.6	108.0	350.6	108.0		
	H59	31	0.296	6,472.4	1,915.8					350.6	103.8	350.6	103.8		
	H60	32	0.285	6,472.4	1,844.6					350.6	99.9	350.6	99.9		
	H61	33	0.274	6,472.4	1,773.4					1,270.7	348.2	1,270.7	348.2		
	H62	34	0.264	6,472.4	1,708.7					350.6	92.6	350.6	92.6		
	H63	35	0.253	6,472.4	1,637.5					350.6	88.7	350.6	88.7		
	H64	36	0.244	6,472.4	1,579.3					350.6	85.5	350.6	85.5		
	H65	37	0.234	6,472.4	1,514.5					350.6	82.0	350.6	82.0		
	H66	38	0.225	6,472.4	1,456.3					350.6	78.9	350.6	78.9		
	H67	39	0.217	6,472.4	1,404.5					350.6	76.1	350.6	76.1		
	H68	40	0.208	6,472.4	1,346.3					350.6	72.9	350.6	72.9		
	H69	41	0.200	6,472.4	1,294.5					350.6	70.1	350.6	70.1		
	H70	42	0.193	6,472.4	1,249.2					350.6	67.7	350.6	67.7		
	H71	43	0.185	6,472.4	1,197.4					350.6	64.9	350.6	64.9		
	H72	44	0.178	6,472.4	1,152.1					350.6	62.4	350.6	62.4		
	H73	45	0.171	6,472.4	1,106.8					350.6	60.0	350.6	60.0		
	H74	46	0.165	6,472.4	1,067.9					350.6	57.8	350.6	57.8		
	H75	47	0.158	6,472.4	1,022.6					350.6	55.4	350.6	55.4		
	H76	48	0.152	6,472.4	983.8					1,270.7	193.1	1,270.7	193.1		
	H77	49	0.146	6,472.4	945.0					350.6	51.2	350.6	51.2		
	H78	50	0.141	6,472.4	912.6					350.6	49.4	350.6	49.4		
	H79	51	0.135	6,472.4	873.8					350.6	47.3	350.6	47.3		
	H80	52	0.130	6,472.4	841.4					350.6	45.6	350.6	45.6		
	H81	53	0.125	6,472.4	809.1					350.6	43.8	350.6	43.8		
	H82	54	0.120	6,472.4	776.7					350.6	42.1	350.6	42.1		
	H83	55	0.116	6,472.4	750.8					350.6	40.7	350.6	40.7		
	H84	56	0.111	6,472.4	718.4					350.6	38.9	350.6	38.9		
合 計				343,610.4	126,557.6	744.7	127,302.3	37,308.1	33,941.5	21,943.4	8,260.9	59,251.5	42,202.4	3.0	85,099.9

様式－５ 費用対便益（当面事業・残工期-10%）

水系名：由良川水系 河川名：由良川

事業費： 37,308
単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			残存価値 ②	計 ①+②	費 用 (C)						費用便益比 B / C	純現在価値 B - C
				便益①		建設費③			維持管理費④	計③+④						
				便益	現在価値					費用	現在価値	費用	現在価値			
評価年 (4 備 年) 期 間	H28	0	1.000	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
	H29	1	0.962	0.0	0.0	15,344.8	14,761.7	0.0	0.0	15,344.8	14,761.7					
	H30	2	0.925	1,806.2	1,670.7	14,600.1	13,505.1	667.0	617.0	15,267.1	14,122.1					
	H31	3	0.889	4,403.1	3,914.3	5,931.5	5,273.1	732.2	650.9	6,663.7	5,924.0					
	H32	4	0.855	5,948.3	5,085.8	1,431.5	1,223.9	432.2	369.5	1,863.7	1,593.4					
施設 完 成 後 の 評 価 期 間 (50年)	H33	5	0.822	6,472.4	5,320.3					139.1	114.3	139.1	114.3			
	H34	6	0.790	6,472.4	5,113.2					508.4	401.6	508.4	401.6			
	H35	7	0.760	6,472.4	4,919.0					508.4	386.4	508.4	386.4			
	H36	8	0.731	6,472.4	4,731.3					508.4	371.6	508.4	371.6			
	H37	9	0.703	6,472.4	4,550.1					508.4	357.4	508.4	357.4			
	H38	10	0.676	6,472.4	4,375.3					508.4	343.7	508.4	343.7			
	H39	11	0.650	6,472.4	4,207.1					508.4	330.5	508.4	330.5			
	H40	12	0.625	6,472.4	4,045.3					508.4	317.8	508.4	317.8			
	H41	13	0.601	6,472.4	3,889.9					508.4	305.5	508.4	305.5			
	H42	14	0.577	6,472.4	3,734.6					508.4	293.3	508.4	293.3			
	H43	15	0.555	6,472.4	3,592.2					508.4	282.2	508.4	282.2			
	H44	16	0.534	6,472.4	3,456.3					508.4	271.5	508.4	271.5			
	H45	17	0.513	6,472.4	3,320.3					508.4	260.8	508.4	260.8			
	H46	18	0.494	6,472.4	3,197.4					1,428.5	705.7	1,428.5	705.7			
	H47	19	0.475	6,472.4	3,074.4					508.4	241.5	508.4	241.5			
	H48	20	0.456	6,472.4	2,951.4					508.4	231.8	508.4	231.8			
	H49	21	0.439	6,472.4	2,841.4					508.4	223.2	508.4	223.2			
	H50	22	0.422	6,472.4	2,731.4					508.4	214.5	508.4	214.5			
	H51	23	0.406	6,472.4	2,627.8					508.4	206.4	508.4	206.4			
	H52	24	0.390	6,472.4	2,524.2					508.4	198.3	508.4	198.3			
	H53	25	0.375	6,472.4	2,427.2					508.4	190.7	508.4	190.7			
	H54	26	0.361	6,472.4	2,336.5					508.4	183.5	508.4	183.5			
	H55	27	0.347	6,472.4	2,245.9					508.4	176.4	508.4	176.4			
	H56	28	0.333	6,472.4	2,155.3					508.4	169.3	508.4	169.3			
	H57	29	0.321	6,472.4	2,077.6					508.4	163.2	508.4	163.2			
	H58	30	0.308	6,472.4	1,993.5					508.4	156.6	508.4	156.6			
	H59	31	0.296	6,472.4	1,915.8					508.4	150.5	508.4	150.5			
	H60	32	0.285	6,472.4	1,844.6					508.4	144.9	508.4	144.9			
	H61	33	0.274	6,472.4	1,773.4					1,428.5	391.4	1,428.5	391.4			
	H62	34	0.264	6,472.4	1,708.7					508.4	134.2	508.4	134.2			
	H63	35	0.253	6,472.4	1,637.5					508.4	128.6	508.4	128.6			
	H64	36	0.244	6,472.4	1,579.3					508.4	124.0	508.4	124.0			
	H65	37	0.234	6,472.4	1,514.5					508.4	119.0	508.4	119.0			
	H66	38	0.225	6,472.4	1,456.3					508.4	114.4	508.4	114.4			
	H67	39	0.217	6,472.4	1,404.5					508.4	110.3	508.4	110.3			
	H68	40	0.208	6,472.4	1,346.3					508.4	105.7	508.4	105.7			
	H69	41	0.200	6,472.4	1,294.5					508.4	101.7	508.4	101.7			
	H70	42	0.193	6,472.4	1,249.2					508.4	98.1	508.4	98.1			
	H71	43	0.185	6,472.4	1,197.4					508.4	94.1	508.4	94.1			
	H72	44	0.178	6,472.4	1,152.1					508.4	90.5	508.4	90.5			
	H73	45	0.171	6,472.4	1,106.8					508.4	86.9	508.4	86.9			
	H74	46	0.165	6,472.4	1,067.9					508.4	83.9	508.4	83.9			
	H75	47	0.158	6,472.4	1,022.6					508.4	80.3	508.4	80.3			
	H76	48	0.152	6,472.4	983.8					1,428.5	217.1	1,428.5	217.1			
	H77	49	0.146	6,472.4	945.0					508.4	74.2	508.4	74.2			
	H78	50	0.141	6,472.4	912.6					508.4	71.7	508.4	71.7			
	H79	51	0.135	6,472.4	873.8					508.4	68.6	508.4	68.6			
	H80	52	0.130	6,472.4	841.4					508.4	66.1	508.4	66.1			
	H81	53	0.125	6,472.4	809.1					508.4	63.6	508.4	63.6			
	H82	54	0.120	6,472.4	776.7					508.4	61.0	508.4	61.0			
合 計				335,777.5	129,523.5	805.1	130,328.6	37,307.9	34,763.8	29,642.4	11,515.9	66,950.3	46,279.7	2.8	84,048.9	

様式－５ 費用対便益（当面事業・資産+10%）

水系名：由良川水系 河川名：由良川

事業費： 37,308

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			費 用 (C)						費用便益比 B／C	純現在価値 B－C	
				便益①		残存価値 ②	計 ①＋②	建設費③		維持管理費④		計③＋④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用			現在価値
評価年	H28	0	1.000	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0		
(整備期間)	H29	1	0.962	0.0	0.0			11,937.9	11,484.3	0.0	0.0	11,937.9	11,484.3		
	H30	2	0.925	1,415.7	1,309.5			13,627.4	12,605.3	526.2	486.7	14,153.6	13,092.0		
	H31	3	0.889	3,687.7	3,278.4			8,759.0	7,786.8	578.3	514.1	9,337.3	8,300.9		
	H32	4	0.855	5,981.6	5,114.3			2,069.3	1,769.3	593.2	507.2	2,662.5	2,276.5		
	H33	5	0.822	6,715.1	5,519.8			914.2	751.5	189.5	155.8	1,103.7	907.3		
施設完成後の評価期間（50年）	H34	6	0.790	7,107.5	5,614.9					107.4	84.8	107.4	84.8		
	H35	7	0.760	7,107.5	5,401.7					413.7	314.4	413.7	314.4		
	H36	8	0.731	7,107.5	5,195.6					413.7	302.4	413.7	302.4		
	H37	9	0.703	7,107.5	4,996.6					413.7	290.8	413.7	290.8		
	H38	10	0.676	7,107.5	4,804.7					413.7	279.7	413.7	279.7		
	H39	11	0.650	7,107.5	4,619.9					413.7	268.9	413.7	268.9		
	H40	12	0.625	7,107.5	4,442.2					413.7	258.6	413.7	258.6		
	H41	13	0.601	7,107.5	4,271.6					413.7	248.6	413.7	248.6		
	H42	14	0.577	7,107.5	4,101.0					413.7	238.7	413.7	238.7		
	H43	15	0.555	7,107.5	3,944.7					413.7	229.6	413.7	229.6		
	H44	16	0.534	7,107.5	3,795.4					413.7	220.9	413.7	220.9		
	H45	17	0.513	7,107.5	3,646.1					413.7	212.2	413.7	212.2		
	H46	18	0.494	7,107.5	3,511.1					1,333.8	658.9	1,333.8	658.9		
	H47	19	0.475	7,107.5	3,376.1					413.7	196.5	413.7	196.5		
	H48	20	0.456	7,107.5	3,241.0					413.7	188.6	413.7	188.6		
	H49	21	0.439	7,107.5	3,120.2					413.7	181.6	413.7	181.6		
	H50	22	0.422	7,107.5	2,999.4					413.7	174.6	413.7	174.6		
	H51	23	0.406	7,107.5	2,885.6					413.7	168.0	413.7	168.0		
	H52	24	0.390	7,107.5	2,771.9					413.7	161.3	413.7	161.3		
	H53	25	0.375	7,107.5	2,665.3					413.7	155.1	413.7	155.1		
	H54	26	0.361	7,107.5	2,565.8					413.7	149.3	413.7	149.3		
	H55	27	0.347	7,107.5	2,466.3					413.7	143.6	413.7	143.6		
	H56	28	0.333	7,107.5	2,366.8					413.7	137.8	413.7	137.8		
	H57	29	0.321	7,107.5	2,281.5					413.7	132.8	413.7	132.8		
	H58	30	0.308	7,107.5	2,189.1					413.7	127.4	413.7	127.4		
	H59	31	0.296	7,107.5	2,103.8					413.7	122.5	413.7	122.5		
	H60	32	0.285	7,107.5	2,025.6					413.7	117.9	413.7	117.9		
	H61	33	0.274	7,107.5	1,947.5					1,333.8	365.5	1,333.8	365.5		
	H62	34	0.264	7,107.5	1,876.4					413.7	109.2	413.7	109.2		
	H63	35	0.253	7,107.5	1,798.2					413.7	104.7	413.7	104.7		
	H64	36	0.244	7,107.5	1,734.2					413.7	100.9	413.7	100.9		
	H65	37	0.234	7,107.5	1,663.2					413.7	96.8	413.7	96.8		
	H66	38	0.225	7,107.5	1,599.2					413.7	93.1	413.7	93.1		
	H67	39	0.217	7,107.5	1,542.3					413.7	89.8	413.7	89.8		
	H68	40	0.208	7,107.5	1,478.4					413.7	86.0	413.7	86.0		
	H69	41	0.200	7,107.5	1,421.5					413.7	82.7	413.7	82.7		
	H70	42	0.193	7,107.5	1,371.7					413.7	79.8	413.7	79.8		
	H71	43	0.185	7,107.5	1,314.9					413.7	76.5	413.7	76.5		
	H72	44	0.178	7,107.5	1,265.1					413.7	73.6	413.7	73.6		
	H73	45	0.171	7,107.5	1,215.4					413.7	70.7	413.7	70.7		
H74	46	0.165	7,107.5	1,172.7					413.7	68.3	413.7	68.3			
H75	47	0.158	7,107.5	1,123.0					413.7	65.4	413.7	65.4			
H76	48	0.152	7,107.5	1,080.3					1,333.8	202.7	1,333.8	202.7			
H77	49	0.146	7,107.5	1,037.7					413.7	60.4	413.7	60.4			
H78	50	0.141	7,107.5	1,002.2					413.7	58.3	413.7	58.3			
H79	51	0.135	7,107.5	959.5					413.7	55.8	413.7	55.8			
H80	52	0.130	7,107.5	924.0					413.7	53.8	413.7	53.8			
H81	53	0.125	7,107.5	888.4					413.7	51.7	413.7	51.7			
H82	54	0.120	7,107.5	852.9					413.7	49.6	413.7	49.6			
H83	55	0.116	7,107.5	824.5					413.7	48.0	413.7	48.0			
合 計				373,175.1	140,719.1	778.3	141,497.4	37,307.8	34,397.2	25,026.2	9,572.6	62,334.0	43,969.8	3.2	97,527.6

様式－５ 費用対便益（当面事業・資産-10%）

水系名：由良川水系 河川名：由良川

事業費：37,308

単位：百万円

年次	年度	t	割引率 4 %	便 益 (B)			費 用 (C)						費用便益比 B / C	純現在価値 B - C	
				便益①		残存価値 ②	計 ① + ②	建設費③		維持管理費④		計③ + ④			
				便益	現在価値			費用	現在価値	費用	現在価値	費用			現在価値
評価年	H28	0	1.000	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0		
(整備期間)	H29	1	0.962	0.0	0.0			11,937.9	11,484.3	0.0	0.0	11,937.9	11,484.3		
	H30	2	0.925	1,161.7	1,074.6			13,627.4	12,605.3	526.2	486.7	14,153.6	13,092.0		
	H31	3	0.889	3,028.9	2,692.7			8,759.0	7,786.8	578.3	514.1	9,337.3	8,300.9		
	H32	4	0.855	4,913.3	4,200.9			2,069.3	1,769.3	593.2	507.2	2,662.5	2,276.5		
	H33	5	0.822	5,515.2	4,533.5			914.2	751.5	189.5	155.8	1,103.7	907.3		
施設完成後の評価期間 (50年)	H34	6	0.790	5,837.1	4,611.3					107.4	84.8	107.4	84.8		
	H35	7	0.760	5,837.1	4,436.2					413.7	314.4	413.7	314.4		
	H36	8	0.731	5,837.1	4,266.9					413.7	302.4	413.7	302.4		
	H37	9	0.703	5,837.1	4,103.5					413.7	290.8	413.7	290.8		
	H38	10	0.676	5,837.1	3,945.9					413.7	279.7	413.7	279.7		
	H39	11	0.650	5,837.1	3,794.1					413.7	268.9	413.7	268.9		
	H40	12	0.625	5,837.1	3,648.2					413.7	258.6	413.7	258.6		
	H41	13	0.601	5,837.1	3,508.1					413.7	248.6	413.7	248.6		
	H42	14	0.577	5,837.1	3,368.0					413.7	238.7	413.7	238.7		
	H43	15	0.555	5,837.1	3,239.6					413.7	229.6	413.7	229.6		
	H44	16	0.534	5,837.1	3,117.0					413.7	220.9	413.7	220.9		
	H45	17	0.513	5,837.1	2,994.4					413.7	212.2	413.7	212.2		
	H46	18	0.494	5,837.1	2,883.5					1,333.8	658.9	1,333.8	658.9		
	H47	19	0.475	5,837.1	2,772.6					413.7	196.5	413.7	196.5		
	H48	20	0.456	5,837.1	2,661.7					413.7	188.6	413.7	188.6		
	H49	21	0.439	5,837.1	2,562.5					413.7	181.6	413.7	181.6		
	H50	22	0.422	5,837.1	2,463.3					413.7	174.6	413.7	174.6		
	H51	23	0.406	5,837.1	2,369.9					413.7	168.0	413.7	168.0		
	H52	24	0.390	5,837.1	2,276.5					413.7	161.3	413.7	161.3		
	H53	25	0.375	5,837.1	2,188.9					413.7	155.1	413.7	155.1		
	H54	26	0.361	5,837.1	2,107.2					413.7	149.3	413.7	149.3		
	H55	27	0.347	5,837.1	2,025.5					413.7	143.6	413.7	143.6		
	H56	28	0.333	5,837.1	1,943.8					413.7	137.8	413.7	137.8		
	H57	29	0.321	5,837.1	1,873.7					413.7	132.8	413.7	132.8		
	H58	30	0.308	5,837.1	1,797.8					413.7	127.4	413.7	127.4		
	H59	31	0.296	5,837.1	1,727.8					413.7	122.5	413.7	122.5		
	H60	32	0.285	5,837.1	1,663.6					413.7	117.9	413.7	117.9		
	H61	33	0.274	5,837.1	1,599.4					1,333.8	365.5	1,333.8	365.5		
	H62	34	0.264	5,837.1	1,541.0					413.7	109.2	413.7	109.2		
	H63	35	0.253	5,837.1	1,476.8					413.7	104.7	413.7	104.7		
	H64	36	0.244	5,837.1	1,424.3					413.7	100.9	413.7	100.9		
	H65	37	0.234	5,837.1	1,365.9					413.7	96.8	413.7	96.8		
	H66	38	0.225	5,837.1	1,313.3					413.7	93.1	413.7	93.1		
	H67	39	0.217	5,837.1	1,266.7					413.7	89.8	413.7	89.8		
	H68	40	0.208	5,837.1	1,214.1					413.7	86.0	413.7	86.0		
	H69	41	0.200	5,837.1	1,167.4					413.7	82.7	413.7	82.7		
	H70	42	0.193	5,837.1	1,126.6					413.7	79.8	413.7	79.8		
	H71	43	0.185	5,837.1	1,079.9					413.7	76.5	413.7	76.5		
	H72	44	0.178	5,837.1	1,039.0					413.7	73.6	413.7	73.6		
	H73	45	0.171	5,837.1	998.1					413.7	70.7	413.7	70.7		
	H74	46	0.165	5,837.1	963.1					413.7	68.3	413.7	68.3		
	H75	47	0.158	5,837.1	922.3					413.7	65.4	413.7	65.4		
	H76	48	0.152	5,837.1	887.2					1,333.8	202.7	1,333.8	202.7		
	H77	49	0.146	5,837.1	852.2					413.7	60.4	413.7	60.4		
	H78	50	0.141	5,837.1	823.0					413.7	58.3	413.7	58.3		
	H79	51	0.135	5,837.1	788.0					413.7	55.8	413.7	55.8		
	H80	52	0.130	5,837.1	758.8					413.7	53.8	413.7	53.8		
	H81	53	0.125	5,837.1	729.6					413.7	51.7	413.7	51.7		
	H82	54	0.120	5,837.1	700.5					413.7	49.6	413.7	49.6		
	H83	55	0.116	5,837.1	677.1					413.7	48.0	413.7	48.0		
合 計				306,474.1	115,567.5	778.3	116,345.8	37,307.8	34,397.2	25,026.2	9,572.6	62,334.0	43,969.8	2.6	72,376.0

事業費の内訳書

河川事業

事業名	由良川直轄河川改修事業（全体事業費）
-----	--------------------

評価年度	平成28年度	再評価
------	--------	-----

区分	費目	工種	単位	数量	金額 (百万円)	備考
工事費			式	1	79,913	
	本工事費		式	1	77,792	
		築堤	km	35	35,451	
		護岸	m	7,740	3,507	
		河道掘削	千m ³	1,525	12,043	樹木伐採含む
		樋門・樋管	箇所	35	9,978	
		堤防改築	m	1,000	466	
		堰改築	箇所	1	3,519	
		ポンプ設備	m ³ /s	27	5,242	
		その他	式	1	7,587	堤防強化、水防拠点、情報通信設備他
	附帯工事費		式	1	2,121	
		橋梁	箇所	3	884	
		その他	式	1	1,237	
用地費及補償費		式		38,366		
用地費		式	1	17,833		
補償費		式	1	20,533		
間接経費		式	1	21,281		
工事諸費		式	1	16,144		
事業費 計		式		155,703		
維持管理費			式		37,311	91年間(H15～H105)

事業費の内訳書

河川事業

事業名	由良川直轄河川改修事業（残事業費）
-----	-------------------

評価年度	平成28年度	再評価
------	--------	-----

区分	費目	工種	単位	数量	金額 (百万円)	備考
工事費			式	1	30,269	
	本工事費		式	1	29,741	
		築堤	km	12	6,511	
		護岸	m	4,160	1,105	
		河道掘削	千m ³	1,334	9,768	樹木伐採含む
		樋門・樋管	箇所	12	1,953	
		堤防改築	m	1,000	466	
		堰改築	箇所	1	3,519	
		ポンプ設備	m ³ /s	21	4,072	
		その他	式	1	2,348	堤防強化、水防拠点、情報通信設備他
	附帯工事費		式	1	528	
		橋梁	箇所	0	0	
その他		式	1	528		
用地費及補償費		式		9,119		
		用地費	式	1	2,670	
		補償費	式	1	6,450	
間接経費		式	1	8,052		
工事諸費		式	1	7,789		
事業費 計		式		55,229		
維持管理費			式		18,957	77年間(H29～H105)

事業費の内訳書

河川事業

事業名	由良川直轄河川改修事業(当面整備事業費)
-----	----------------------

評価年度	平成28年度	再評価
------	--------	-----

区分	費目	工種	単位	数量	金額 (百万円)	備考	
工事費			式	1	20,801		
	本工事費			式	1	20,325	
		築堤	km	10	6,080		
		護岸	m	3,740	850		
		河道掘削	千m ³	632	5,450	樹木伐採含む	
		樋門・樋管	箇所	9	1,660		
		堤防改築	m	0	0		
		堰改築	箇所	0	0		
		ポンプ設備	m ³ /s	21	4,072		
		その他	式	1	2,213	堤防強化、水防拠点、情報通信設備他	
	附帯工事費			式	1	476	
		橋梁	箇所	0	0		
		その他	式	1	476		
用地費及補償費		式		8,152			
用地費		式	1	1,988			
補償費		式	1	6,164			
間接経費		式	1	5,155			
工事諸費		式	1	5,122			
事業費 計		式		39,230			
維持管理費			式		27,029	55年間(H29～H83)	